



Catalogue 8 STAUFF Diagtronics

Germany

Walter Stauffenberg GmbH & Co. KG Im Ehrenfeld 4 58791 Werdohl

www.stauff.com

STAUFF products and services are globally available through wholly-owned subsidiaries and a tight network of authorised distributors and representatives in all major industrial regions of the world.

You can find detailed contact information on the last two pages of this product catalogue or at www.stauff.com/contact.

Please note: Unless otherwise stated, all data and figures in this product catalogue are approximate values and are only valid as references, which are not binding (also in respect to any third parties' rights of protection) and thus do not release the customer / user from checking and testing the suitability of the products for the foreseen purposes. Therefore, data and figures can only be used in a limited sense for construction purposes.

The application of the products is beyond the control possibilities of the manufacturer and, therefore, is exclusively subject to the responsibility of the customer / user.

In the event that a liability is nevertheless considered, any compensation will be limited to the value of the goods supplied by the manufacturer and used by the customer / user. As a matter of course, the manufacturer guarantees the perfect quality of all products in accordance with the General Terms and Conditions of Business and Sale.

Subject to modifications due to the ongoing development and improvement of the products.


With the publication of this product catalogue, previous editions are no longer valid.

Introduction	4 - 11
Pressure Gauges	12 - 21
Hydraulic Testers	22 - 63
Oil Analysis Equipment	64 - 83
Appendix (Product-Specific Abbreviations / Global Contact Directory)	84 - 89

C

®



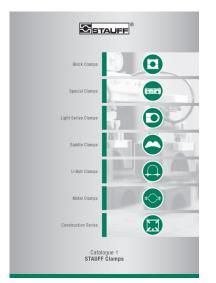

Catalogue 1 STAUFF Clamps

- Block Clamps
- Special Clamps
- Light Series ClampsSaddle Clamps
- U-Bolt Clamps
- Metal Clamps
- Construction Series




Catalogue 2 STAUFF Connect

- Tube Connectors
- Assembly Tools and Devices



Catalogue 3 STAUFF Flanges

SAE FlangesGear Pump Flanges

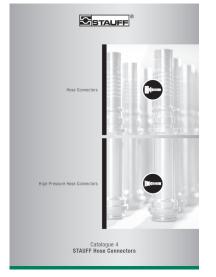


Catalogue 4 STAUFF Hose Connectors

- Hose Connectors
- High-Pressure Hose Connectors



Catalogue 5 STAUFF Quick Release Couplings

- Push-to-Connect Couplings
- Multi Couplings
- Screw-to-Connect Couplings

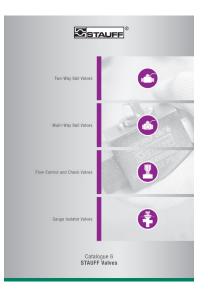

Catalogue 6 STAUFF Valves

- Two-Way Ball Valves
- Multi-Way Ball Valves
- Flow Control and Check Valves
- Gauge Isolator Valves






Catalogue 7 STAUFF Test

- Test Couplings
- Test Adaptors
- Test Hoses and Connectors




Catalogue 8 **STAUFF Diagtronics**

- Pressure Gauges
- Hydraulic Testers
- Oil Analysis Equipment

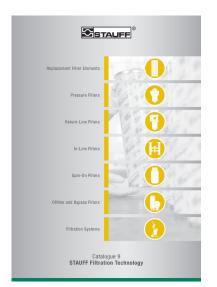

Catalogue 9 **STAUFF Filtration Technology**

- Replacement Filter Elements
- Pressure Filters
- Return-Line Filters
- In-Line Filters
- Spin-On Filters
- Offline and Bypass Filters
- Filtration Systems

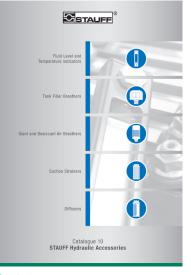

Catalogue 10 STAUFF Hydraulic Accessories

- Fluid Level and Temperature Indicators
- Tank Filler Breathers
- Giant and Desiccant Air Breathers
- Suction Strainers
- Diffusors





For more than 50 years, the companies of STAUFF Group have been developing, manufacturing and distributing pipework equipment and hydraulic components for mechanical and plant engineering and for service and industrial maintenance.


In addition to mobile and industrial hydraulic machinery, typical applications also include commercial and special purpose vehicles, rail transportation and energy technology. Likewise, STAUFF products are used in marine, oil and gas applications and in the process, food and chemical industries. The overall range currently includes about 50000 standard products as well as numerous special and system solutions according to customer's specifications or based on our in-house development.

All STAUFF products undergo relevant testing in accordance with international regulations and are governed by the high standards of the in-house quality management system. Furthermore, many items have received certifications and approvals from various international institutes, organisations and authorities who have independently confirmed the quality and performance of the products. Wholly-owned manufacturing, sales and service facilities in 18 countries and a tight global network of authorised distribution partners ensure high presence and service paired with a maximum of availability.



Quality Management – ISO 9001:2015 Environmental Management – ISO 14001:2015 Safety Management – ISO 45001:2018 Energy Management – ISO 50001:2018

STAUFF LINE Components

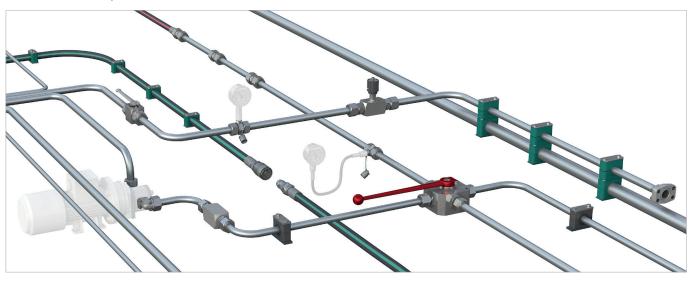

With the seven dedicated STAUFF Line product groups

- STAUFF Clamps
- STAUFF Connect
- STAUFF Flanges
- STAUFF Hose Connectors
- STAUFF Quick Release Couplings
- STAUFF Valves
- STAULT Valve
 STAULT Valve

from own, in-house development and manufacturing, the companies of the STAUFF Group provide a comprehensive range of components for fastening and connecting pipes, tubes and hoses for mobile and industrial hydraulic applications and many other industries.

The portfolio is completed by components for shutting-off, regulating, throttling and measuring fluid media.


In order to perfectly match each other, STAUFF Line products are designed and offered on a high, uniform level of quality. A large proportion of the range made from steel comes as standard with the premium STAUFF Zinc/Nickel surface coating, which is also optionally available for many of the other components.

This coating offers the most reliable surface protection far beyond the previous market standards – even after transport, handling and assembly of the components – and meets all current legal requirements.

If desired, Original Equipment Manufacturers can be supported with value-added services, from **technical consultation** to **pre-assembly, assembly and kitting** as well as **logistics services**:

- Support with the selection of suitable standard components and ordering options; provision of customised solutions according to customer's specifications or based on our in-house development – from prototyping to large scale production
- Analysis and optimization of existing and design and developments of new systems aimed at increasing the efficiency and performance of machines and equipment and creating value for customers by reducing the total cost
- Pre-assembly, assembly and kitting of individual components to customer-specific system modules
- Individually coordinated procurement solutions (e.g. web shop and electronic data interchange) and supply models (e.g. from warehousing of customised components to Kanban logistics and just-in-time delivery of pre-fabricated system modules to the assembly lines of the customers) aimed at optimising material flows



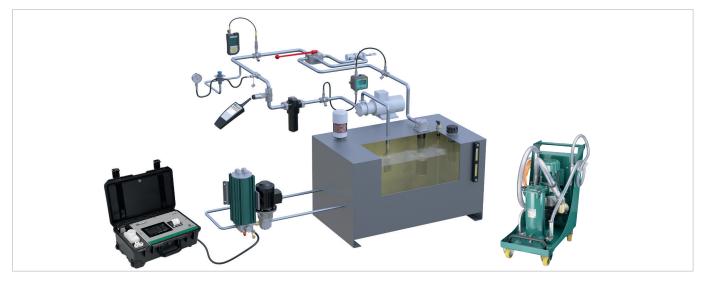

Aligned with the needs of the market, the product groups

- STAUFF Test
- STAUFF Diagtronics
- STAUFF Filtration Technology
- STAUFF Hydraulic Accessories

include a comprehensive range of analogue and digital measuring equipment and devices, filtration systems and replacement filter elements as well as accessories for the construction of tanks, reservoirs, power packs and gear boxes in mobile and industrial hydraulics. The offer is completed by relevant value-added services:

- Support with the selection of suitable components and ordering options; provision of customised solutions according to customer's specifications or based on our in-house development – from prototyping to large scale production
- Analysis of existing hydraulic circuits aimed at filtration systems, tank components and monitoring devices that perfectly match to the specific requirements, and developing integrated concepts to increase the efficiency and performance of machines and equipment
- Individually coordinated procurement solutions and supply models





STAUFF Diagtronics

With measuring, testing, display and analysis devices and equipment from the STAUFF Diagtronics product range, system operators, maintenance personnel and repair technicians can determine and monitor the essential parameters in mobile and industrial hydraulics: operating pressure, maximum pressure, differential pressure, system temperature, volume flow, contamination and much more.

The range includes analogue and digital pressure gauges, that are either supplied individually or as part of practical pressure test kits including the required connection adaptors and accessories, as well as high-performance hand-held hydraulic testers of the PPC series, that have been developed to meet the growing demands of the industry. The PT-RF series of pressure transmitters and readers are an alternative solution for universal pressure measurements for fluid technology applications. The advantages resulting from the use of the non-contact RFID technology for system operators, maintenance personnel and repair technicians are clear: Measurements can be carried very easily, without extensive training and within a few seconds at the press of a button and then documented in a reliable process – while temporary opening of the system if not required. Potential hazards for people, machines and the environment as well as ingress of contamination into the system can be effectively excluded. Fluid analysis is a crucial element of any oil management program. Early detection of system contamination can prevent costly repairs and downtime.

Mobile and stationary STAUFF particle counters and monitors enable the precise determination of cleanliness levels of hydraulic media according to international standards.







www.stauff.com/catalogues

The STAUFF online catalogue centre at www.stauff.com/catalougues provides fast and direct access to digital versions of this as well as other STAUFF product catalogues in all available languages.

Online Page-Flip Catalogues

- Easy navigation through index or the powerful full text search functionality
- Contents can be shared and forwarded by e-mail, printed or downloaded and saved in PDF file format
- Also suitable for mobile devices

Download Catalogues

- Download entire product catalogues and save them in PDF file format

The fastest way to the online page-flip catalogue:

The links that can be found at the bottom edge of all pages of this product catalogue will lead you directly to the corresponding page in the online page-flip catalogue.

In doing so, contents can be searched, shared and

Scan the QR code next to the direct link with the camera of your mobile device* and also use the functions in this way.

* may require a suitable app

orwarded by e-mail, printed or downloaded and aved in PDF file format.		
10	Catalogue 8 - Edition 04/2025	www.stauff.com/8/en/#10





www.stauff.com

With the STAUFF Digital Platform available at www.stauff.com, commercial customers and users of STAUFF products can not only inform themselves in all detail about the 50000 components typically available from stock, but also directly purchase these online without complex registration.

Main Functionalities of the STAUFF Digital Platform:

CAD database

Around the clock 24h

Check stock availability and pricing for STAUFF products in real time



Cross references Search by article designations of other manufacturers / suppliers



Live chat Get directly in touch with the STAUFF customer service and sales team

Download 3D models and 2D drawings for STAUFF products

General information about the companies of STAUFF Group, latest business and product news as well as complete global contact details also be available.

Advantages as a Registered User of the STAUFF Digital Platform:

Purchase STAUFF products

Taking customer-specific pricing and delivery conditions into account

Ordering w/o searching

File upload

Quick ordering by entering article number, quantity and requested delivery date



Direct upload of orders with multiple positions in CSV or Excel file format

Notepad function

Create project lists to save interesting products for later

www.stauff.com/cad

Immediate access to and free download of 3D models and 2D drawings for a growing number of STAUFF products

www.filterinterchange.com

Online database for the quick and easy identification and interchange of almost all common brands and types of replacement filter elements

Follow STAUFF and keep yourself updated:

Linkedin in

You Tube

www.linkedin.com/company/stauff

Youtube www.youtube.com/stauffgroup

STAUFF Newsletters



Automatic e-mail notifications about latest news from STAUFF www.stauff.com/newsletter



	ര
	•
MSTAUFF	

	Introduction	14
	Information on the Pressure Equipment Directive	15
	Accessories for Pressure Gauges	15
	Pressure Gauges	16 - 21
	Analogue Pressure Gauge	16
	SPG	
	Analogue Pressure Test Kit	18
<u>9999</u>	SMB-20 / SMB-15	
	Digital Pressure Gauge	20
¥	SPG-DIGI / SPG-DIGI-USB	
	Digital Pressure Test Kit	21
	SMB-DIGI / SMB-DIGI-USB	



Pressure Gauges (analogue/digital) and Accessories



Measuring pressure on equipment is indispensable for monitoring and ensuring the smooth functioning and operating safety of these systems.

STAUFF offers a variety of simple pressure measuring devices for liquid and gaseous media. These pressure gauges can be used as both stationary or portable devices. STAUFF addresses the very extensive width of possible system pressures and the strict requirements for precision with a variety of pressure gauge types with different measuring ranges. The glycerine filled gauge range is available with various connection ports to fit many different installation needs. The pressure gauges can be purchased alone or in a test kit. The kits can be supplied with gauges with different pressure ranges and adaptors to satisfy any requirement.

The analog pressure gauges are primarily designed for permanent installations. STAUFF also offers a digital line for analytical troubleshooting.

These digital pressure gauges are also available as a pressure test kit and also make it possible to perform the many different measurement tasks with the help of adaptors and the measuring hose. An important advantage is the possibility to measure pressure peaks with the device, to save them short term and to display them in the display as MIN and MAX values.

In addtion to the individual products, the STAUFF measuring devices are also available as kit.

R

STAUFF



Pressure Gauges

Information on the Pressure Equipment Directive (PED) 97/23/EC Pressure Equipment Directive (PED)

Our pressure gauges (SPG) conform to the European Standard EN 837-1 and are manufactured and tested according to appropriate requirements. Pressure gauges with a full scale value between 0,5 bar and 200 bar / 7.25 PSI and 2900 PSI come under "Good Engineering Practice" and must not carry a CE mark (section 3, paragraph 3).

Pressure gauges (SPG) with a full scale value of less than 0,5 bar / 7.25 PSI and loose diaphragm sealings do not come under the PED and must not carry a CE mark. Our pressure gauges (SPG) with a full scale value of > 200 bar / 2900 PSI receive a CE mark according to the conformity procedure.



The CE mark is attached to the outside of the housing (type designation plate). We are not authorised to CE mark pressure gauges without a company name or a company logo.

Pressure Gauges Accessories



Single Station Gauge Isolator Valve (see Catalogue 6 - STAUFF Valves)



Test Hoses - Gauge Adaptor (see Catalogue 7 - STAUFF Test)



Adjustable Gauge Fitting (see Catalogue 7 - STAUFF Test)



Multi Station Gauge Isolator Valve (see Catalogue 6 - STAUFF Valves)



Gauge Isolator Needle Valves (see Catalogue 6 - STAUFF Valves)



Gauge Adaptor (see Catalogue 7 - STAUFF Test)



Direct Gauge Adaptor (see Catalogue 7 - STAUFF Test)

Α

Pressure Gauge (analogue) - Type SPG



Pressure Gauge (Analogue) Type SPG (Stem Mounting)

Product Description

Area of Application

Mechanical pressure measurement

Features

- Suitable for hydraulic oil and gaseous media compatible with copper based alloys
- Available in nominal sizes 63 and 100 mm / 2.5 and 4 in - Thread form: for BSP (G1/4 and G1/2),
- NPT (1/4 NPT and 1/2 NPT), SAE (7/16-20 UNF)
- Stainless Steel (1.4301) housing
- Acrylic sight glass
- Glycerine filled
- Standard dual scales with pressure indication in bar and PSI
- · U-bolt or flange mounting kit on request

Note: Please contact STAUFF before you use SPG with other media.

Options

- Protective rubber cap
- Additional scale readings including personilisation
- U-bolt and flange mounting kits are available separately as spare parts

Technical Data

- Pressure gauge according to EN 837-1
- · Subject to technical modifications

Accuracies SP

SF

PG-063:	1.6 (± 1.6 % FS* as per EN 837-1)
PG-100:	1.0 (± 1.0 % FS* as per EN 837-1)

Note: Accuracy data according to EN 837-1, vertical adjustment position

Permissible Temperatures

- -20 °C ... +60 °C / -4 °F ... +140 °F Ambient: max. +60 °C / max. +140 °F
- Media:


Protection Ratings IP 65:

for all manometer SPG-100 and SPG-063 > 16 bar / 232 PSI IP 65 protection rating: Dust tight and protected against water jets for all manometer SPG-063 ≤ 16 bar / 232 PSI due to pressure compensation opening IP 54 protection rating: Dust protected and protected against splashing water



Pressure Gauge (Analogue) Type SPG (Panel Mounting)

Order Codes

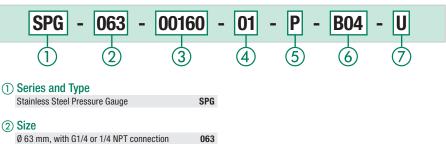

Ø 100 mm, with G1/2 or 1/2 NPT connection 100

(3) Pressure Ranges

ッ	r rossuro nungos			
	Pressure Ranges for style of scale 01 - bar/PSI	Code	Pressure Ranges for style of scale 05 - PSI/bar	Code
	-1 1,5 bar / -14.5 21 PSI	(-00001)-00001.5	-1,02 0 bar / -30 inHg 0 PSI	30HG30
	-1 3 bar / -14.5 43 PSI	(-00001)-00003	-1,02 2,07 bar / -30 inHg 30 PSI	03030
	0 10 bar / 0 145 PSI	00010	0 2,07 bar / 0 30 PSI	00030
	0 16 bar / 0 232 PSI	00016	0 4,14 bar / 0 60 PSI	00060
	0 25 bar / 0 362 PSI	00025	0 6,89 bar / 0 100 PSI	00100
	0 40 bar / 0 580 PSI	00040	0 11,03 bar / 0 160 PSI	00160
	0 60 bar / 0 870 PSI	00060	0 13,79 bar / 0 200 PSI	00200
	0 100 bar / 0 1450 PSI	00100	0 20,68 bar / 0 300 PSI	00300
	0 160 bar / 0 2320 PSI	00160	0 34,74 bar / 0 500 PSI	00500
	0 250 bar / 0 3625 PSI	00250	0 41,37 bar / 0 600 PSI	00600
	0 400 bar / 0 5801 PSI	00400	0 68,95 bar / 0 1000 PSI	01000
	0 600 bar / 0 8702 PSI	00600	0 103,42 bar / 0 1500 PSI	01500
	0 680 bar / 0 9862 PSI	00680	0 137,90 bar / 0 2000 PSI	02000
	0 700 bar / 0 10152 PSI	00700	0 206,84 bar / 0 3000 PSI	03000
	0 1000 bar / 0 14503 PSI	01000	0 275,79 bar / 0 4000 PSI	04000
			0 344,74 bar / 0 5000 PSI	05000

Note: Others on request. Information always refer to the pressure setting of the outside scale.

(4) Styles of Scales

bar / PSI (bar outside / PSI inside - standard option Europe)	01
bar	02
PSI	03
PSI / bar (PSI outside / bar inside - standard option North America)	05
kPa / PSI (kPa outside / PSI inside)	10

Note: Others on request

(5) Adaption

Stem mounting	
Panel mounting	

(6) Process Connection

0 ... 413.69 bar / 0 ... 6000 PSI

0 ... 517,11 bar / 0 ... 7500 PSI

0 ... 689,48 bar / 0 ... 10000 PSI

G1/4 (only SPG-063)	B04
G1/2 (only SPG-100)	B08
1/4 NPT (only SPG-063)	N04
1/2 NPT (only SPG-100)	N08
7/16-20 UNF (only SPG-063)	U04

06000

07500

10000

Note: Others on request.

(7) Accessories

S


No accessory	(none)
U-bolt assembly	U
Front flange assembly (for panel mount only)	F
Rear flange assembly	R
U-bolt and front flange assembly	UE
(for panel mount only)	UF
Protective rubber cap (for stem mount only)	G

* FS = Full Scale

IP 54



Pressure Gauge (analogue) - Type SPG

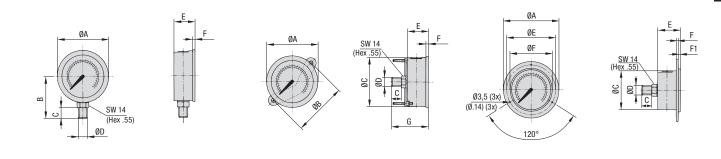


SPG-063 ... S ...

SPG-063 ... P ... U

SPG-063 ... P ... F

Dimensions SPG-063

Version	Dimension (^{mm} / _{in})											
Pressure Gauge	ØA	ØB	ØC	ØD	ØE	ØF	В	C	E	F	F1	G
SPG-063	69		-	G1/4 1/4 NPT	-	-	54	15	32	6,5		-
	2.72	-		7/16–20 UNF			2.13	.59	1.26	.26		
000 000 11	69	72	62	G1/4				15	32	6,5		56
SPG-063 U	2.72	2.83	2.44	1/4 NPT 7/16–20 UNF	-	-	-	.59	1.26	.26		2.20
CDC 0C0 F	85		62	G1/4	75	68		15	32	1	6,5	
SPG-063 F	3.35	-	2.44	1/4 NPT 7/16-20 UNF	2.95	2.68	-	.59	1.26	.04	.26	-

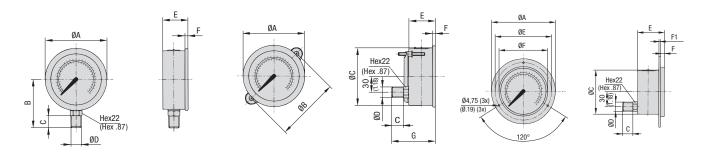

SPG-100 ... S ...

SPG-100 ... P ... U

SPG-100 ... P ... F

Dimensions SPG-100

Version	Dimension (mm/ _{in})											
Pressure Gauge	ØA	ØB	ØC	ØD	ØE	ØF	В	C	E	F	F1	G
SPG-100	107			G1/2			87	23	48	8		-
	4.21	-	-	1/2 NPT	-	-	3.43	.91	1.89	.31		
CDC 100 U	107	107	100	G1/2				23	48	8		81,5
SPG-100 U	4.21	4.21	3.94	1/2 NPT	-		-	.91	1.89	.31	-	3.21
SPG-100 F	132		100	G1/2	116	107		23	48	8	1,25	
	5.20	-	3.94	1/2 NPT	4.57	4.21	-	.91	1.89	.31	.05	-

* FS = Full Scale

Dimensional drawings: All dimensions in mm (in).

Pressure Test Kit (analogue) - Type SMB-20 / SMB-15



Pressure test kit (analogue) with SPG-063 (3x) Pressure test kit (analogue) with SPG-100 (1x)

Product Description

custom-designed foam inserts.

Please see on page 19 for standard options.

test kit.


In addition to the individual SPG gauges, the STAUFF

The SMB Pressure Test Kits are assembled in various versions, in accordance with customer wishes. All pressure test kits are supplied in a handy case with

Custom kits available upon request. Please contact STAUFF.

Pressure Gauges are also available as part of a pressure

Order Codes



1 Series and Type

Pressure Test Kit, analogue (STAUFF Test 20) SMB-20 Pressure Test Kit, analogue (STAUFF Test 15) SMB-15

(2) Number of Pressure Gauges

1 pressure gauge SPG-063	1
2 pressure gauges SPG-063	2
3 pressure gauges SPG-063	3
1 pressure gauge SPG-100	/100-1

③ Pressure Ranges

-1 3 bar / -14.5 43 PSI	(-1)-003
0 10 bar / 0 145 PSI	010
0 16 bar / 0 232 PSI	016
0 25 bar / 0 362 PSI	025
0 40 bar / 0 580 PSI	040
0 60 bar / 0 870 PSI	060
0 100 bar / 0 1450 PSI	100
0 160 bar / 0 2320 PSI	160
0 250 bar / 0 3625 PSI	250
0 400 bar / 0 5801 PSI	400
0 600 bar / 0 8702 PSI	600

Note: Please indicate pressure ranges in bar. For one pressure gauge please replace xxx. For two pressure gauges please replace xxx/xxx. For three pressure gauges please replace xxx/xxx/xxx.

(4) Material Surface

Steel, zinc/nickel plated W3

For further information see Catalogue 7 - STAUFF Test.





A

Standard Option for Pressure Test Kits (analogue) - Type SMB-20 / SMB-15

Series	Components	Order Codes	Series	Components	Order Codes
	1x Test hose (2000 mm length)	SMS-20-2000-B-W3	SMB-15-1-xxx-W3	1x Test hose (2000 mm length)	SMS-15-2000-B-W3
	1x Pressure gauge Ø 63 mm	SPG-063-xxx		1x Pressure gauge Ø 63 mm	SPG-063-xxx
	1x Gauge adaptor G1/4	SMA-20-G1/4-B-0R-W3		1x Gauge adaptor G1/4	SMA-15-G1/4-B-0R-W3
SMB-20-1-xxx-W3	1x Direct gauge adaptor G1/4	SMD-20-G1/4-B-0R-W3		1x Direct gauge adaptor G1/4	SMD-15-G1/4-B-0R-W3
SIMD-20-1-XXX-W3	1x Test coupling G1/4	SMK-20-G1/4-B-C-W3		1x Test coupling G1/4	SMK-15-G1/4-B-B-W3
	1x Test coupling M10 x 1	SMK-20-M10x1-B-A-W3		1x Test coupling M14 x 1,5	SMK-15-M14x1.5-B-B-W3
	1x Thread adaptor G3/8	SRS-20-G3/8-B-W3		1x Thread adaptor G3/8	SRS-15-G3/8-B-W3
	1x Thread adaptor G1/2	SRS-20-G1/2-B-W3		1x Thread adaptor G1/2	SRS-15-G1/2-B-W3
xxx/xxx = pressure ranges see on page 18 (please indicate pressure ranges in bar)					

Custom kits available upon request. Please contact STAUFF.

Series	Components	Order Codes	Series	Components	Order Codes
2x Pressure gauges 1x Gauge adaptor G 1x Direct gauge ada 1x Direct gauge ada 1x Test coupling G1	1x Test hose (2000 mm length)	SMS-20-2000-B-W3	SMB-15-2-xxx/xxx-W3	1x Test hose (2000 mm length)	SMS-15-2000-B-W3
	2x Pressure gauges Ø 63 mm	SPG-063-xxx		2x Pressure gauges Ø 63 mm	SPG-063-xxx
	1x Gauge adaptor G1/4	SMA-20-G1/4-B-0R-W3		1x Gauge adaptor G1/4	SMA-15-G1/4-B-0R-W3
	1x Direct gauge adaptor G1/4	SMD-20-G1/4-B-0R-W3		1x Direct gauge adaptor G1/4	SMD-15-G1/4-B-0R-W3
	1x Test coupling G1/4	SMK-20-G1/4-B-C-W3		1x Test coupling G1/4	SMK-15-G1/4-B-B-W3
	1x Test coupling M10 x 1	SMK-20-M10x1-B-A-W3		1x Test coupling M14 x 1,5	SMK-15-M14x1.5-B-B-W3
	1x Thread adaptor G3/8	SRS-20-G3/8-B-W3		1x Thread adaptor G3/8	SRS-15-G3/8-B-W3
	1x Thread adaptor G1/2	SRS-20-G1/2-B-W3		1x Thread adaptor G1/2	SRS-15-G1/2-B-W3
xxx/xxx/xxx = pressure ranges see on page 18 (please indicate pressure ranges in bar)					


Custom kits available upon request. Please contact STAUFF.

Series	Components	Order Codes	Series	Components	Order Codes
	2x Test hoses (2000 mm length)	SMS-20-2000-B-W3	SMB-15-3-yyy/yyy/yyy-W3	2x Test hoses (2000 mm length)	SMS-15-2000-B-W3
	3x Pressure gauges Ø 63 mm	SPG-063-xxx		3x Pressure gauges Ø 63 mm	SPG-063-xxx
SMB-20-3-xxx/xxx/xxx-W3	1x Gauge adaptor G1/4	SMA-20-G1/4-B-0R-W3		1x Gauge adaptor G1/4	SMA-15-G1/4-B-OR-W3
	2x Direct gauge adaptors G1/4	SMD-20-G1/4-B-0R-W3		2x Direct gauge adaptors G1/4	SMD-15-G1/4-B-0R-W3
	3x Test couplings G1/4	SMK-20-G1/4-B-C-W3		3x Test couplings G1/4	SMK-15-G1/4-B-B-W3
	3x Test couplings M10 x 1	SMK-20-M10x1-B-A-W3		3x Test couplings M14 x 1,5	SMK-15-M14x1.5-B-B-W3
	1x Thread adaptor G3/8	SRS-20-G3/8-B-W3		1x Thread adaptor G3/8	SRS-15-G3/8-B-W3
	1x Thread adaptor G1/2	SRS-20-G1/2-B-W3		1x Thread adaptor G1/2	SRS-15-G1/2-B-W3
xxx/xxx/xxx = pressure ranges see on page 18 (please indicate pressure ranges in bar)					

Custom kits available upon request. Please contact STAUFF.

Series	Components	Order Codes	Series	Components	Order Codes
	1x Test hose (2000 mm length)	SMS-20-2000-B-W3	SMB-15/100-1-xxx-W3	1x Test hose (2000 mm length)	SMS-15-2000-B-W3
	1x Pressure gauge Ø 100 mm	SPG-100-xxx		1x Pressure gauge Ø 100 mm	SPG-100-xxx
SMB-20/100-1-xxx-W3	1x Gauge adaptor G1/2	SMA-20-G1/2-B-0R-W3		1x Gauge adaptor G1/2	SMA-15-G1/2-B-0R-W3
	1x Direct gauge adaptor G1/2	SMD-20-G1/2-B-0R-W3		1x Direct gauge adaptor G1/2	SMD-15-G1/2-B-0R-W3
	1x Test coupling G1/2	SMK-20-G1/2-B-C-W3		1x Test coupling G1/4	SMK-15-G1/4-B-B-W3
	1x Test coupling M10 x 1	SMK-20-M10x1-B-A-W3		1x Test coupling M14 x 1,5	SMK-15-M14x1.5-B-B-W3
	1x Thread adaptor G3/8	SRS-20-G3/8-B-W3		1x Thread adaptor G3/8	SRS-15-G3/8-B-W3
	1x Thread adaptor G1/2	SRS-20-G1/2-B-W3		1x Thread adaptor G1/2	SRS-15-G1/2-B-W3
xxx/xxx/xxx = pressure ranges see on page 18 (please indicate pressure ranges in bar)					

Custom kits available upon request. Please contact STAUFF.

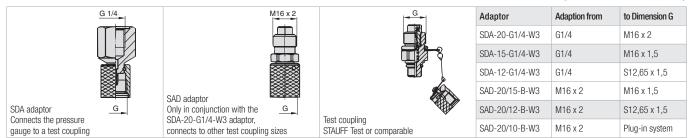

Other adaptors are available.


ര TALIE

Digital Pressure Gauge - Type SPG-DIGI / SPG-DIGI-USB (Data Logger)




SPG-DIG

STAUFF SPG-DIGI-USB SPG-DIGI-USB

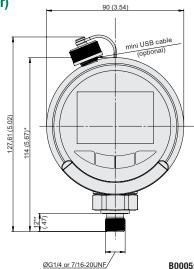

B0016

ා

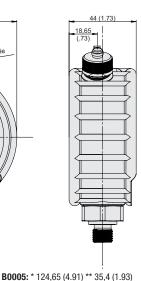

В

U

Product Description

The STAUFF SPG-DIGI digital pressure gauges are designed for digital measurement and display of pressure in hydraulic systems, especially for oils, lubricants and water. Current measured values as well as min and max values can be displayed with a precision of 0.5% of the full scale value.

The SPG-DIGI is optionally available in the USB version, equipped with an internal data memory. A measurement started on the measuring device is automatically stored in the internal data memory in the universal .csv file format. The measurement data can then be transferred to the PC using the supplied mini USB cable. The device shows up on the PC as a USB data storage medium, so that no additional software is required for transferring the data. This allows easy export of the data, e.g. into Microsoft Excel®.

The measurement data are stored in the internal memory with a resolution of up to 100 ms for short measurements and a pressure peak monitoring of 10 ms. Up to ten measurement series can be stored in the device. The maximum measurement duration for each measurement is 24 h.

The STAUFF SPG-DIGI digital pressure gauges are available individually or as part of a complete pressure test kit. They are very robust, reliable, easy to operate and bear a CE mark.

Features

- Bar graph display (drag pointer)
- Backlit display
- Zero point correction
- Battery status indicator Gauge ability to swivel 360°

Technical Data (for SPG-DIGI-USB)

 Internal memory: Measurement data lengths: Memory interval: 	10 measurement series max. 24 h up to 100 ms (increases with duration of measurement)
 Pressure peak detection min Date type: Data format:	/max: 10 ms Date / time / pressure value / min. pressure / max. pressure CSV

A USB connecting cable is supplied as a standard.

Order Codes SPG-DIGI

\cup		
1) Series and Type		3 Process Co
Digital Pressure Gauge	SPG-DIGI	G1/4
Digital Pressure Gauge USB	SPG-DIGI-USB	7/16-20 UNF
		Colibration

(2) Pressure Ranges

/	r rossuro nungos	
	-1 5 bar / -14.5 72 PSI	B0005
	-1 16 bar / -14.5 232 PSI	B0016
	0 100 bar / 0 1450 PSI	B0100
	0 400 bar / 0 5801 PSI	B0400
	0 600 bar / 0 8702 PSI	B0600
	0 1000 bar / 0 14504 PSI	B1000

Process Connection 1/4

B

④ Calibration		
without calibration	certificate	(none)
with calibration cer	tificate	CAL

CAL

Δ

Pressure Ranges

Version	Pressure Range (bar/PSI)	Maximum Pressure (bar/PSI)	Burst Pressure (bar/PSI)
B0005	-1 5	30	50
00000	-14.5 72	435	725
B0016	-1 16	32	160
DU010	-14.5 232	464	2321
B0100	0 100	200	800
B0100	0 1450	2900	11603
B0400	0 400	800	1700
D0400	0 5801	11603	24656
B0600	0 600	1200	2400
D0000	0 8702	17404	31908
B1000	0 1000	1500	2500
B1000	0 14504	21756	36259

Technical Data

Materials

- Housing made of die-cast Zinc with TPE
- Wetted parts: Stainless Steel 1.4404, NBR (Buna-N[®]), ceramics
- NBR (Buna-N®) Seals:
- FKM (Viton®) or EPDM on request Weight
- Max. weight: 360 g / .79 lbs

Display

Units:

- Text display 4 1/2 digits
- Size:
- Actual value display: 15 mm / .59 in
- MIN/MAX or FS* display: 8 mm / .31 in
 - bar, PSI Mpa (not for 5 bar and 16 bar),

50 x 34 mm / 1.97 x 1.34 in

kPa (not for 1000 bar), mbar (only for 5 bar and 16 bar)

· Pressure peak measurement with 10 ms sampling rate Illuminated measured value display

Accuracy

±0.25% FS* typ. / ±0.5% FS* max. Permissible Temperature ranges

Ambient temp.:

- -10 °C ... +50 °C / +14 °F ... +122 °F Media temp.:
 - -20 °C ... +80 °C / -4 °F ... +176 °F -20 °C ... +60 °C / -4 °F ... +140 °F
- Storage temp.: Relative humidity: < 85%
 - SPG-DIGI: max. 600 hours
- Battery life: SPG-DIGI-USB: max. 1500 hours
- (operation without illumination, 2 x 1.5 V DC AA (LR6-AA) alkaline)

Process Connections

- G1/4 or 7/16–20 UNF. Stainless Steel 1.4404
- Vibration: IEC 60068-2-6 / 10 ... 500 Hz / 5 g Shock:
 - IEC 60068-2-27 / 11 ms / 25 g 100
- Load change (10⁶):
- **Protection Rating**
- IP 65:
- Dust-tight and protected against water jets
- (SPG-DIGI-USB: IP65 only with cover installed)

Pressure Test Kit (digital) - Type SMB-DIGI



Digital Pressure Test Kit (SPG-DIGI-USB)

Product Description

In addition to the individual SPG-DIGI devices, the STAUFF Digital Pressure Gauges are also available as part of a pressure test kit.

The SMB-DIGI pressure test kits are assembled in various versions, in accordance with customer wishes. All pressure test kits are supplied in a handy case with custom-designed foam inserts.

Components

В

U

CAL

Standard Option SMB-DIGI-20

- Digital Pressure Gauge SPG-DIGI or SPG-DIGI-USB* Test Hose (2 m / 6.56 ft), M16 x 2, pressure-resistant
- 600 bar (8702 PSI) SMS-20-2000-B-W3
- Adaptor SDA (G1/4 to M16 x 2) SDA-20-G1/4-W3
- Hose Connector SSV-20-W3
- Test Coupling SMK-20-G1/4-B-C-W3
- Test Coupling SMK-20-M10x1-B-A-W3
- Thread Adaptor SRS-20-G3/8-B-W3
- Thread Adaptor SRS-20-G1/2-B-W3
- Quickguide · *Supplied with a mini USB connecting cable


Order Codes

-1 ... 16 bar / -14.5 ... 232 PSI

0 ... 100 bar / 0 ... 1450 PSI

0 ... 400 bar / 0 ... 5801 PSI

0 ... 600 bar / 0 ... 8702 PSI

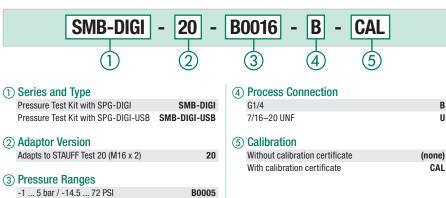

B0016


B0100

B0400


B0600

Pressure Ranges Version Pressure Range (bar/PSI) Maximum Pressure (bar/PSI) Burst Pressure (bar/PSI) -1 ... 5 30 50 B0005 435 -14.5 ... 72 725 -1 ... 16 32 160 B0016 -14.5 ... 232 464 2321 0...100 200 800 B0100 0...1450 2900 11603 0 ... 400 800 1700 B0400 24656 0 ... 5801 11603 0...600 1200 2400 B0600 0 ... 8702 17404 31908

Accessories (Connection Adaptors)

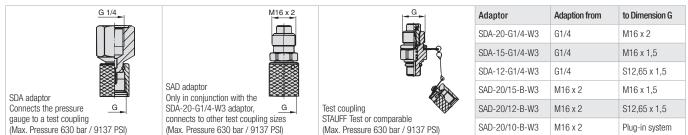

Other adaptors are available.

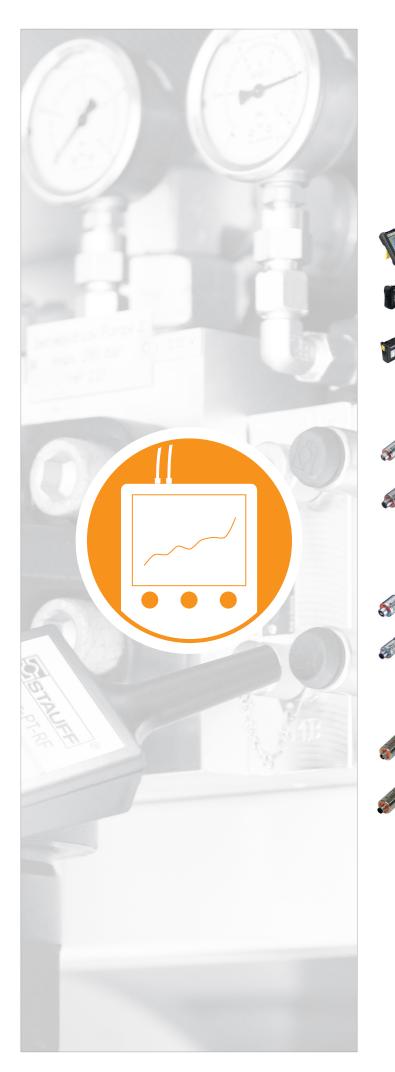

	Introduction	24
	Overview	25
	Hydraulic Testers	26 - 35
	PPC-04-plus PPC-04-plus-CAN	25
	PPC-PAD-light PPC-PAD-light-CAN	28
	PPC-PAD-plus	32
	Pressure Sensors	36 - 37
	Sensor-PPC-04/12-P	36
a de la	Sensor-PPC-CAN-P	37
	Temperature Sensors	38 - 39
of the second	Sensor-PPC-04/12-T	38
and at	Sensor-PPC-CAN-T	39
	Pressure / Temperature Sensors	40 - 41
	Sensor-PPC-04/12-PT	40
J)	Sensor-PPC-CAN-PT	41

® R STAUFF

B

	Flow Turbine	42 - 43
	Flow-meter-PPC-04/12-SFM	42
	Flow-meter-PPC-CAN-SFM	43
	Other sensors and cables	44 - 47
8 0	Rotational Speed Sensor	44
	Sensor-PPC-04/12-SDS-CAB	
8088	Current / Voltage / Frequency Converter	45
	Sensorconverter-PPC	
A STATE	Accessories	46
A State	CAN Accessories	47
	Complete Systems	48 - 50
1.20	PPC-04-plus-SET and PPC-PAD-light-SET	48
AF -	PPC-04-plus-CAN-SET and PPC-PAD-light-CAN-SET	49
	PPC-PAD-plus (Starter System)	50
	Ordering Tables	51 - 52
	Hydraulic Testers	51
	Sensors	52

Wireless Pressure Measurement System	53 - 61
PT-RF	
Overview	53
Pressure Transmitter	
PT-RF	54
Reader	
 Reader-PT-RF	55
Complete Systems	56
PT-RF-SET	
 Accumulator Adaptor	58
SBAA / SBAA-P / SDAA	
Flow Indicators	62 - 63
Flow Indicators	62



B

Hydraulic Testers of the PPC Series



The STAUFF measuring and test equipment from the PPC Series is ideal for measuring all relevant parameters in fluid technology systems such as pressure, differential pressure, temperature, flow rate and power.

Depending on the type, they enable evaluation, storage and further processing in PCs or notebooks. They have been specially developed to meet the growing requirements for system monitoring, troubleshooting and measured value determination in hydraulic and pneumatic systems. All versions offer automatic sensor recognition, thus eliminating the need for tedious and often time-consuming parameterisation of sensors. The intuitive keypad or touch screen makes it easy to control the devices and change the measuring units via the menu.

There are many different areas of application:

- Industrial hydraulics
- · Mobile, agricultural and forestry hydraulics
- Ship and offshore hydraulics
- Chemicals and petrochemicals
- Energy and air-conditioning systems
- Heating and sanitary systems

The PPC-04-plus hydraulic measuring and testing devices are characterised, among other things, by their uncomplicated operation. Even in difficult lighting conditions, it is possible to read the measured values quickly and reliably thanks to the multi-line, backlit LCD display. The hydraulic measuring device is available in two versions, either with 2 inputs for analogue STAUFF Sensors or with a CAN interface for connecting up to 3 STAUFF CAN Sensors. Both versions are equipped with an internal data memory and a USB port and are powered by an internal power supply (Lithium Ion battery). With the software supplied, it is possible to display the measured values not only as numerical values but also as diagrams on the PC.

Depending on the version, the PPC-PAD-light series measuring devices offer the option of connecting 4 analogue STAUFF Sensors or 6 STAUFF CAN Sensors.

Third-party sensors (e.g. 4-20 mA or 0-10 V) can also be operated with these devices without any problems. Both measuring devices have a large internal data memory and an integrated USB interface and can be operated for several hours on battery power. All measurement data can be easily visualised and settings made on the 4.3" touch display. The most powerful device in this family of measuring devices is the PPC-PAD-plus. This multifunctional device has been specially adapted to the increased requirements of fluid technology and users.

The measured values can be shown in various display modes on the large 7" touch display, enabling effective, solutionoriented analyses. The device has a modular sensor input design. This means that the basic device can be expanded to include up to 6 analogue STAUFF Sensors and up to 48 STAUFF CAN Sensors by using additional input modules.

It also offers extensive options for saving countless and varied measurement tasks as 'templates' and calling them up immediately when required. This means that even complex, recurring measurement tasks can be started more or less immediately.

The hydraulic measuring and testing devices and the sensors of the PPC series are of course also available in a calibrated version and are supplied with a calibration certificate (factory calibration).

Subsequent calibration can be requested via a special order designation.



Hydraulic Testers of the PPC Series - Product Overview

Hydraulic Testers					
Options	PPC-04-plus	PPC-04-plus-CAN	PPC-PAD-light	PPC-PAD-light-CAN	PPC-PAD-plus

Connection principle	Analogue sensors	CAN sensors	Analogue sensors	CAN sensors	Analogue sensors + CAN sensors
Battery mode	•	•	•	•	•
Number of sensor inputs	up to 2 analogue STAUFF Sensors	up to 3 STAUFF CAN Sensors	up to 4 analogue STAUFF Sensors	up to 6 STAUFF CAN Sensors	up to 6 analogue STAUFF Sensors and up to 48 STAUFF CAN Sensors
Option for adding sensor inputs	-	-	-	-	•
PC interface	Micro-USB	Micro-USB	USB-C	USB-C	USB / Ethernet / WLAN
Online function	•	•	•	•	•
Internal data memory	•	•	•	•	•
Programming of automatic test sequence	-	-	•	•	•
Trigger function	-	-	•	•	•
Touch screen	-	-	•	•	•
Illuminated display	•	•	•	•	•
Curve shown on the display	-	-	•	•	•
PC software kit	•	•	•	•	•
Pressure measurement	•	•	•	•	•
Temperature measurement	•	•	•	•	•
Flow rate measurement	•	•	•	•	•
Rotational speed measurement	•	_	•	-	•
Frequency measurement	with optional current/voltage/ frequency converter	integrated into the device			
Third-party analogue sensors	with optional current/voltage/ frequency converter	with optional current/voltage/ frequency converter	integrated into the device	optional	integrated into the device
Third-party CAN sensors	-	-	-	-	an CAN-Y max. 5 third-party sensors

 \bullet = standard, – = not available

Hydraulic Testers • Type PPC-04-plus / PPC-04-plus-CAN





Product Description

The PPC-04-plus and PPC-04-plus-CAN Hydraulic Testers have been developed for the growing demands in mobile and industrial hydraulic systems. They are perfectly suited for the precise determination of pressure, temperature, volume flow and rotational speed

- Multi-line, backlit LCD display
- Max. 2 analogue STAUFF Sensors can be connected at the same time
- · With CAN interface, max. 3 CAN STAUFF Sensors can be connected at the same time
- Integrated data memory for 15000 data records (max. 24 hours)
- External storage by using a USB memory stick (1 GB included)
- Max. cable length: 50 m / 164 ft (CAN version)

The Hydraulic Testers are available in two versions. The PPC-04-plus, analogue version, comes with two inputs for connecting up to 2 analogue STAUFF Sensors at the same time. The PPC-04-plus-CAN comes with an CAN interface for connecting up to 3 CAN STAUFF Sensors at the same time. Both versions provide automatic sensor recognition, thus making the tedious and often time-consuming parameterization of sensors redundant. The units can be easily operated via the keyboard and the individual device configurations can be viewed and managed.

Due to its extremely robust construction and oil-resistant rubber coating, the Hydraulic Testers can withstand impacts, vibrations, dust and moisture (protection class up to IP 67) and is designed for use in particularly harsh conditions.

The internal battery (Lithium Ion pack) can be charged via an micro USB connection, this connection can be also used to transfer the internally stored data to a PC or notebook. Furthermore, this connection is also provided for real-time presentation of the measured values on the PC.

The PPC-04-plus devices can store up to 15000 data records and 270000 measured values. The included PPC software is compatible with popular Windows® PC operating systems and permits various evaluation methods.

It is also possible to connect the Pressure Sensors under load, with the equipment switched on. The temperature and volume flow sensors are to be installed in the pipelines. The Rotational Speed Sensor is a non-contacting sensor and uses an optical mark on the rotating parts. Measuring the differential pressure requires two Pressure

Sensors with identical measuring ranges.

The units are also available as a complete set See pages 48 / 49 for further information.



PPC-04-plus with 2 sensor inputs for max. 2 analogue STAUFF Sensors

Order Codes

CAN PPC-04-plus (2)

PPC-04-plus

(1) Series and Type

Hydraulic Tester

(2) Version	
Analogue STAUFF Sensors	(none)
STAUFF CAN Sensors	CAN

Technical Data

Materials

· Housing made of ABS in a rubber protective

Dimensions and Weight

W x H x D: 96 x 172 x 54 mm / 3.78 x 6.77 x 2.13 in Weight: ca. 540 g / 1.19 lbs

Measurements / Display

- in bar, PSI, mbar, kPa, MPa Pressure:
- in °C and °F Temperature:
- Volume flow: in I/min and US GPM
- Rotational speed: in 1/min and RPM
- Display: FSTN-LCD, graphic, LED backlit
- Visible area: 62 x 62 mm / 2.44 x 2.44 in
- Resolution: 130 x 130 Pixel
- Internal measured value memory: 1 measurement, approx. 15000 data sets (270000 measured values ACT/ MIN/MAX), max. 24 h per measurement

Power Supply

Battery:

- External: Micro USB socket, type B +5V DC, max. 1000 mA
 - Lithium lon pack
 - 3,7 V DC / 2250 mAh or
- 3.7 V DC / 4500 mAh CAN version Operating time with the rechargeable battery:
 - approx. 8 hours

Sensor Inputs

- Push-in connection: 5-pol., push-pull or 5-pol., M12x1. connector (CAN version)
- Automatic sensor recognition
- Sampling rate: 1 ms
- Accuracy: < ±0,2 % FS* ±1 Digit



ര

TALIEF

PPC-04-plus-CAN with CAN interface for up to 3 STAUFF CAN Sensors (max. 50 m / 164 ft cable length)

CAL

(3) Calibration

Without calibration certificate	(none)
With calibration certificate (factory calibration)	CAL

Note:

Calibration certificate is only available for the analogue Hydraulic Tester PPC-04-plus.

Permissible Temperatures

Ambient:Storage:	0 °C +50 °C / +32 °F +122 °F -25 °C +60 °C / -13 °F +140 °F
Relative humidity:CE certified	< 80 %

Int

terraces	
USB device:	Online transmission between unit and PC via PPC-Soft-plus (software)
	Measured value transmission:
	ACT/MIN/MAX, min. 5 ms
	USB standard: 2.0, fullspeed
	Push-in connection:
	Micro USB socket, shielded, type B
USB host:	Connection for USB stick, max. 4 GB
	USB standard: 2.0, fullspeed,
	max. 100 mA
	Push-on connection:
	USB socket, shielded, type A

Protection Rating

IP 54 protection rating: Dust protected and protected against splashing water

 (CAN version) IP 67 protection rating: Dust tight and protected against splashing water

Software

A PC set, consisting of a USB connection lead, length 1 m / 3.28 ft and the corresponding PC software, is included in the scope of delivery.

The measured data and curves can be easiliy transferred and processed by using PPC-Soft-plus software as well as exported to Microsoft Excel®

Dimensional drawings: All dimensions in mm (in).


www.stauff.com/8/en/#26






B

Connection example for analogue STAUFF Sensors • Type PPC-04-plus

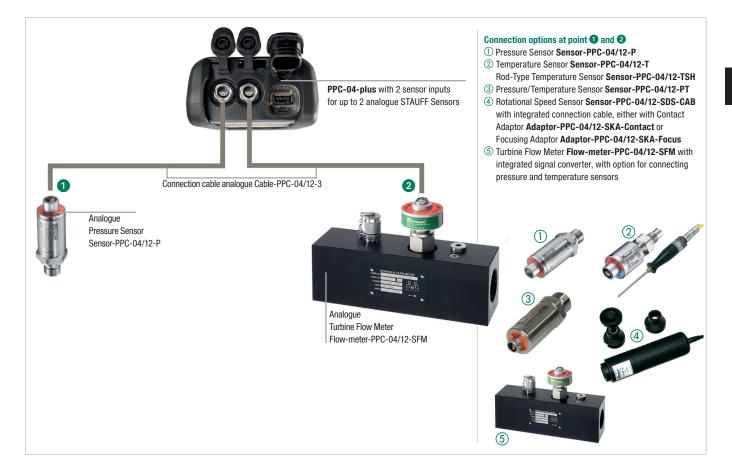

Connection example STAUFF CAN Sensors Type PPC-04-plus-CAN

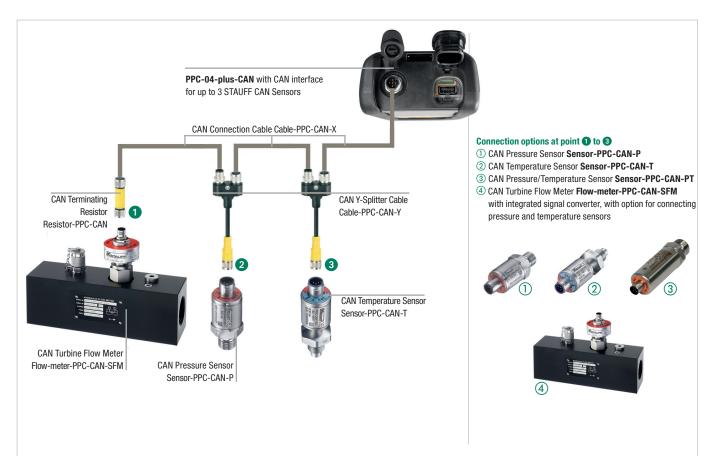

Hydraulic Tester - Type PPC-PAD-light / PPC-PAD-light-CAN



Product Description

B

The PPC-PAD-light measuring devices have been specially developed to meet the growing demands of system monitoring and troubleshooting in hydraulic and pneumatic systems.

The ergonomically designed housing and the LCD display that automatically adjusts to the appropriate line size allow problemfree use even under difficult environmental conditions. The 4.3" touchscreen enables easy programming of the device and convenient visualisation of the measurement data.

The PPC-PAD-light can be used to measure, save and process all relevant hydraulic parameters such as pressure, differential pressure, temperature, speed, flow rate and hydraulic power.

The PPC-PAD-light and PPC-PAD-light-CAN devices differ in the type of sensor connection. The PPC-PAD-light can process up to 4 analogue STAUFF Sensors and the PPC-PAD-CAN up to 6 STAUFF CAN Sensors with max. cable length: 50 m / 164 ft (CAN version) simultaneously.

In particular, the extensive programming options and the internal memory capacity enable a wide range of measurement and evaluation procedures such as long-term measurements, trigger functions or the recording of data from external sensors (e.g. 4-20 mA or 0-10 V).

Thanks to automatic sensor recognition, the measuring devices are easy to operate and can be customised to customer requirements without the need for extensive programming.

The devices can be used to record measured values with a resolution of up to 1 ms = 1000 measured values/s. The measured values can be transferred to a PC or notebook at any time via the USB interface or retrieved directly via the built-in USB stick. The PPC software included in the scope of delivery is compatible with standard Windows® PC operating systems and enables a wide range of analyses.

The devices are also available as a complete system. Further information can be found on pages 48 / 49.

Product Features

- Automatic sensor recognition
- Curve display on screen
- Intuitive 4.3" touchscreen
- Large integrated data memory
- Long-term recording of MIN/MAX values possible
- · Recurring measurement tasks can be programmed

STAUF

- as templates
- Trigger function
- Online data transfer Integrated USB stick
- USB-C charging and data transfer



Function Description

- 1 Automatic sensor recognition, simply plug in and measure 2 USB interface to PC for online measurement or convenient
- evaluation and documentation via PPC Analyse software ③ Power supply via quick-charging USB-C power supply unit
- ④ Start/stop measurement with automatic data compression or manual setting of storage time and rate
- (5) Screenshots at the push of a button
- 6 Robust construction with oil-resistant rubber protection for use in harsh conditions
- Additional tactile keypad for operation under difficult conditions
- (8) Measurement and display of up to 16 channels
- 9 4.3" touch display and plain text navigation for easy
- operation, can also be operated with gloves
- 1 Curve diagram or numerical display
- (1) Pressure, temperature, flow rate, speed, frequency, etc. - everything is measured, stored, monitored and analysed



28

Hydraulic Tester • Type PPC-PAD-light / PPC-PAD-light-CAN


Order Codes

Versions

length)

mA or 0-10 V).

types and configurations:



(none)

CAN

1) Series and Type	
Hydraulic Tester	PPC-PAD-light
<u></u>	
(2) Version	

Analogue STAUFF Sensors STAUFF CAN Sensors

The PPC-PAD-light is available in three different versions and

therefore offers a wide range of options for different sensor

PPC-PAD-light for up to 4 analogue STAUFF Sensors

2 analogue external sensors (e.g. 4-20 mA or 0-10 V).

PPC-PAD-light-CAN for up to 6 STAUFF CAN Sensors

with automatic sensor recognition. (max. 50 m / 164 ft cable

PPC-PAD-light-CAN-AUX for up to 6 STAUFF CAN Sensors

recognition and up to 2 external analogue sensors (e.g. 4-20

(max. 50 m / 164 ft cable length) with automatic sensor

with automatic sensor recognition and up to

(3) Third-party Sensor Input without Third-party Sensor Input

with third-party sensor input (e.g. 4-20mA or 0-10V)

(4) Calibration

 Without calibration certificate
 (none)

 With calibration certificate (factory calibration)
 CAL

 (only PPC-PAD-light, PPC-PAD-light-CAN-AUX)
 CAL

Technical Data

Materials

- Housing: ABS/PC (thermoplastic)
- Protective housing cover: TPE (thermoplastic elastomer)

Dimensions and Weight

• W x H x D:	215 x 60 x 154 mm /
	3.78 x 6.77 x 2.13 in
Weight:	ca. 810 g / 1.79 lbs

VESA mount: 75 x 75 mm

Measurements / Display

- Pressure: in bar, PSI, mbar, kPa, MPa
- Temperature: in °C and °F
- Volume flow: in I/min and US GPM
- Rotational speed: in 1/min and RPM
- Display: 4.3" Touchscreen, 800 × 480 Pixel
 Data output with connection option for
- notebook and PC
- Data storage on USB stick, under protective cap

Power Supply

- internal Lithium Ion pack 7,2 V / 3500mAh / 25,44 Wh
- USB-C charging -> in accordance with IEC 62680-1-3, USB PD 3.0, 5 V, 12 V, 20 V, current consumption max. 2.5 A at 5 V, 1.8 A at 12 V, 1.2 A at 20 V
- A USB-C compatible charger with at least 45 W is required for fast charging
- Alternatively via USB-A/C cable (included) 5 V max. 2 A
- For long-term measurements, the use of a fast charger is recommended

Sensor Inputs PPC-PAD-light

- for up to 4 analogue STAUFF Sensors with automatic sensor recognition
- Plug connection: 5 pin, push-pull, combination Built-in plug/socket
- Sampling rate: 1 ms = 1,000 measured values/sec.
- Accuracy: 0.1% FS

Sensor Inputs PPC-PAD-light-CAN

- for up to 6 STAUFF CAN Sensors with automatic sensor recognition
- Plug connection: 5-pin, M12x1 panel connector (male)
- Sampling rate: up to 4 sensors 1 ms, 5 or 6 sensors 2 ms

Delivery Includes

- Measuring device (according to the selection)
- USB stick 4GB
- Quick guide with link to software and complete instructions
- USB cable (type A to type C)
 Touch-Pen
- Power supply not included (please order separately)

Power supply

(ohne)

AUX

STAUFF relies on the new USB-C standard for the PPC-PADlight. The measuring device can therefore be charged using different chargers. Fast charging as well as safe continuous operation can be achieved using the separately available fastcharging USB-C power supply unit.

Order code for quick charger:

Power-Supply-PPC-PAD-light

Third-party Sensor Inputs (PPC-PAD-light and PPC-PADlight-CAN-AUX)

- 1 connection with 2 inputs (analogue) for measuring current and voltage
- Voltage measuring range: -10...+10 VDC
- Current measuring range: 0/4...20 mA
- Supply for external sensors: 24 VDC +/-5 %, max. 350 mA (for both inputs)
- Plug connection: M12x1, 5 pin socket
- Sampling rate: 1 ms = 1000 measured values/s FAST-MODE 0.1 ms = 10000 measured values/s

Data output

- Integrated USB port (USB 2.0)
- Online data transfer to the PC
- Individually selectable speed (5 ms ... 60 s)
- USB-A socket: USB 2.0, full speed, 12 Mbit/s Max. memory size 128 GB

Ambient Conditions

- Ambient temperature: -10...+50 °C
- Storage temperature: -20...+60 °C
- Relative humidity: max. 95% non-condensing
- CE approval
 - Protection class IP 65 (EN 60529:1989 +A1:1999 + A2:2013), all screw connections must be fitted with sensors or protective caps

Software


 A PC set, consisting of a USB connection cable, length 1.5 m / 4.9 ft and the corresponding PC software, is supplied as standard with every PPC-PAD-light and PPC-PAD-light-CAN. The measured data and measurement curves can be transferred and processed via the PPC-Analyze software and exported to Microsoft Excel®.

Accessories


- Pen: Pen-PPC-PAD-light
- Safety glass: Protection-glas-PPC-PAD-light
- Quick charger: Power-Supply-PPC-PAD-light



Connection example for analogue STAUFF Sensors - Type PPC-PAD-light

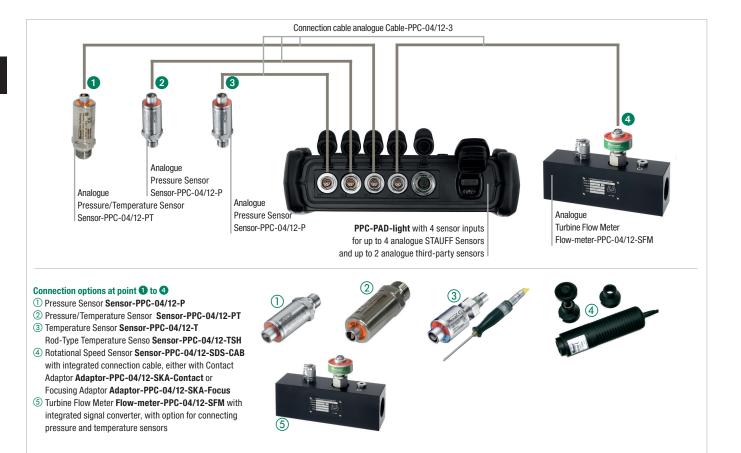


Connection example STAUFF CAN Sensors - Type PPC-PAD-light-CAN

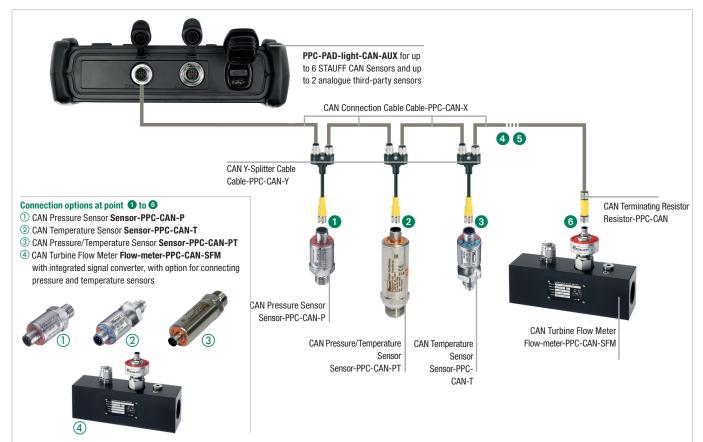





Hydraulic Tester • PPC-PAD-light / PPC-PAD-light-CAN Display

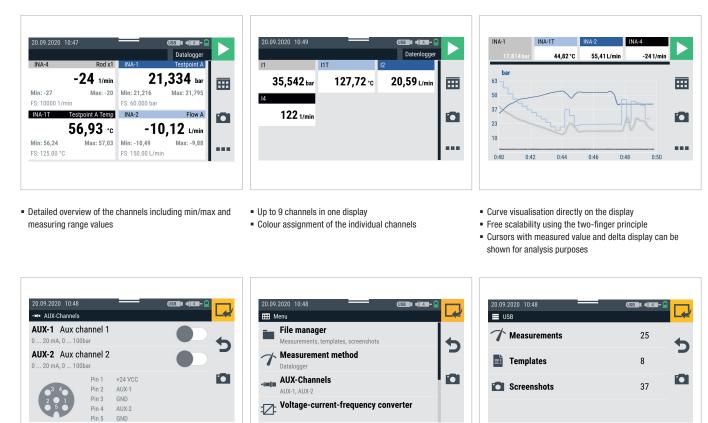


- Depending on the device type, up to 2 Third-party Sensors can be configured directly on the device
- Voltage measuring range: -10...+10 VDC or Current measuring range: 0/4...20 mA


Intuitive menu navigation

- Loading recorded measurement data directly on the device

Hydraulic Tester • PPC-PAD-light / PPC-PAD-light-CAN PC-Software PPC-Analyze



The PPC-Analyze Software that is included with the tester can display, analyse and export the recorded curves.



In addition, measurements can be shown on the monitor in real time using USB.

31

Hydraulic Tester • Type PPC-PAD-plus





Product Description

The application options for hydraulic technology have increased significantly in all areas of drive and control systems.

This trend is particularly evident in the fields of machinery, plant and automotive engineering. At the same time, hydraulics and electronics are becoming increasingly more interlinked.

The PPC-PAD-plus Multifunction Hand-Held Hydraulic Tester was developed especially for high demands and helps you to master these new challenges. It has never been so easy to track the complex processes in these industries through measurements, displays and analyses. Possible areas of application include preventive maintenance, commissioning, troubleshooting and machine optimisation. The increased requirements of these modern applications (e.g. more measuring points, longer cables and higher immunity to interference) have driven the further development of the CAN bus

The new PPC-PAD-plus has a 7" touch screen which makes operation very simple, even for complex tasks.

The modular design also ensures best possible adaptation to a variety of different measuring tasks. Different input modules are offered for connecting additional sensors. These modules can easily be replaced by the user. There is an option of running the basic device with max. two additional modules in the device.

The CAN Bus Sensors from STAUFF use the automatic sensor detection of the bus to allow an easy-to-install plug-and-play solution (max. CAN bus length 100 m/328 ft).

One great advantage is the option to generate a variety of different templates for recurring measuring tasks and saving these in so-called containers. Calling up these templates for recurring measuring tasks ensures interpretation and comparability of the results at all times. This can even go so far as executing these templates automatically at the press of a button

The newly integrated WIFI function also allows the device to be controlled via remote access, which means that executing measuring tasks and calling up the recorded data from a different location are no longer a challenge.

The PPC-Analyze PC Software offers additional methods for analysis, control and remote service using LAN and USB connections. In combination with this software, the PPC-PADplus is a very user-friendly hydraulic tester that is suitable for all types of diagnostic applications.

32

Product Features (for basic device)

- · Portable multifunction hand-held tester · Measuring, monitoring and analysis of pressure,
- temperature, volumetric flow rate and mass flow rate
- · Measurement recording with a resolution of up to 1 ms
- Measurement and display of over 50 channels
- Sensor inputs can be expanded with additional input modules · 2 frequency inputs for connecting third-party sensors or
- digital inputs/outputs 7" touch display, suitable for operation with gloves,
- robust 3 mm glass, resolution 800 x 480 pixels
- Connection of third-party CAN open sensors possible · Analogue input module with galvanic isolation available
- · Display of measured values: numerical, bar graph, pressure gauge, points, curve diagram
- Saving and loading project templates
- Defining of quick values possible (green, yellow, red)
- Memory for up to 1 billion measured values
- The measured data can be recorded (automatically), saved and analysed with the PPC-Analyze PC Software over a LAN, WIFI or USB connection.
- Max. CAN bus length: 100 m/328 ft

Technical Data (for basic device)

Inputs/Outputs

- CAN sensor inputs:
- 2 CAN bus networks, each with 24 STAUFF CAN bus channels. Alternatively on CAN Y with up to 5 third-party CAN open sensors. Baud rate adjustable for third-party CAN

24 V DC power supply/max. 250 mA. Mixed operation of STAUFF CAN and third-party CAN within one CAN bus line not possible. Internal terminating resistor 120 Ω. Supports CAN 2.0 A/CAN 2.0 B

- Sampling rate: 1 ms = 1000 measured values/s Plua-in connection: M12x1: 5-pin with.
 - integrated connector
- Digital input/output and frequency input: Dual assignment input that can be used either as DIGITAL-IN and DIGITAL-OUT, or two frequency inputs are provided through switchover. Also possible as detection of direction of rotation

Galvanically isolated

Frequency (0 Hz...20 kHz)

24 V DC, 80 mA

- Connection: M12x1 female (5-pin)
- Input· · Power supply:
- Input signals:
- Level/threshold:
 - Active low: 0...1.4 V, Active high: 3...30 V
- Accuracy:
- $\leq \pm 0.1\%$ Input module slots: Flexible addition of up to 2 modules

Touch Display

- Size/resolution: 7", 800 x 480 pixels
- Brightness: 450 cd
- · Can be operated with gloves

Calculation Channels

- Number: Functions:
 - /, *, +, -, f'(t), Integral, sin, cos, tan, x², SQRT, xy
- Maximum number of calculation from channels/ calc channel. 3

Interfaces

- USB device: Data transfer between device and PC USB host 1+2: USB 2.0, connection of external memory media Internal memory: 12 GB Connection of network cables LAN:
- Wireless communication
- PPC-PAD-plus-W: WIFI

Ambient Conditions

- · Ambient temperature: -10...+50 °C
- -20...+60 °C Storage temperature:
- Bel humidity. < 80%
- Environmental testing: 1 m drop test
- (EN 60721-3-7) Vibrations: EN 60721-3-7, 7M3
- · Protection rating: IP 65 (EN/IEC 60529:2014)
- External power supply
- 110/240 V AC 24 V DC/3.5 A
- Connection:

Rechargeable Battery

Lithium-ion pack, 14.4 V/3350 mAh

Materials

- Housing: ABS/PC (thermoplastic)
- Protective housing cover: TPE (thermoplastic elastomer)
- Flammability rating: UE94V0
- Dimensions (w x h x d): 282 x 195 x 85 mm
- · Weight: 1880 g (without input module)
- VESA connection: 100 x 100 mm / M4 metric

www.stauff.com/8/en/#32




3-pin



B

Hydraulic Tester • Type PPC-PAD-plus

Order Codes for Basic Device

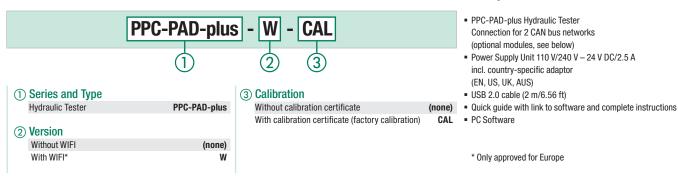

Expansion Modules (Input Modules) for the PPC-PAD-plus

The PPC-PAD-plus is equipped with two input module slots for individually adapting the device to the application. The input modules are available in various versions and can easily be retrofitted or replaced by the user. The analogue input modules are also available with a calibration certificate.

Product Characteristics / Technical Data (for input modules)

Analogue Input Module

The analogue input module is equipped with three analogue connections IN 1 - 3 for sensors with automatic sensor detection (STAUFF ANALOGUE) and an analogue connection IN 4/5 for up to two third-party sensors without automatic sensor detection (e.g. standard industrial sensors).

 3 sensor inputs with sensor detection (p/t/Q/n) for PPC sensors

Plug-in connection: 5-pin, push-pull, combination integrated

- male/female connector · Sampling rate: 1 ms = 1000 measured values/s
- Operating temperature range: -10 °C...+50 °C
- -20 °C...+60 °C Storage temperature range: 152 g
- · Weight:
- Input for third-party sensors: 2 sensor inputs (analogue), for measuring current and voltage 1 ms = 1000 measured values/s Sampling rate: Voltage measuring range: -10...+10 V DC Current measuring range: 0/4...20 mA +24 V DC/max. 100 mA Supply for ext. sensors: Plug connection: M12x1; 5-pin female connector

Analogue Input Module with Galvanically Isolated Sensor Inputs

This input module offers the same options as the analogue input module, but with the connections galvanically isolated from the PPC-PAD.

As the "analogue input module", but with sensors inputs galvanically isolated from the PPC-PAD-plus.

CAN Input Module

Delivery Includes

The CAN Input Module is equipped with two passive CAN bus connections for third-party sensors without automatic sensor detection (third-party CAN).

In addition, this slot offers the option of connecting the PPC-PAD to an existing CAN BUS network using the SAE J1939 protocol for the purpose of reading messages from other CAN bus nodes. This can be the bus of a vehicle or machine, for example. The CAN module is passive and cannot be detected by other CAN masters.

Both connections are galvanically isolated from each other and from the device.

- 2 x M12x1 5-pin connector input for connecting to CAN
- systems such as CANopen, CAN generic and SAE-J1939
- Plua-in connection:


Weight:

- 2 x M12 5-pin female, CAN1xx, CAN2xx,
- each galvanically isolated
- Number of CAN1xx channels: 24
- Number of CAN2xx channels: 24 Standards
 - CAN 2.0 A, CAN 2.0 B
- Supported protocols: CANopen, SAEJ1939 and CAN generic,
 - mixed operation of several CAN protocols possible Terminating Resistor: Can be activated or

deactivated

- Supply for signal connection: Passive, no external supply
- Operating temperature range: -10 °C...+50 °C Storage temperature range: -20 °C...+60 °C
 - 127 a

Order Codes for Input Modules

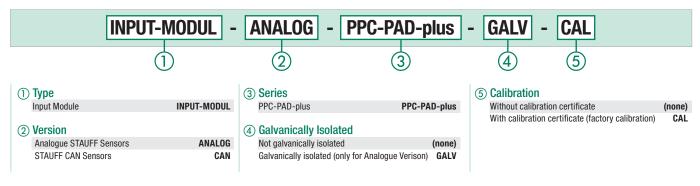

Hydraulic Tester • Type PPC-PAD-plus




Function Description

- ① Illuminated, glare-free colour display for good readability in all situations, 7" size for a clear overview of comprehensive information
- 2 Suitable for operation with gloves, robust 3 mm glass, resolution 800 x 480 pixels
- ③ High protection against moisture and dirt, protection rating IP 65
- ④ Intuitive operation with clear icons and function-related buttons and apps
- (5) Integrated mount for carrying strap
- 6 Robust, oil-resistant housing protection for use in rough environments and for absorbing impacts
- ⑦ Additional large tactile keyboard for reliable operation even in difficult conditions

Connection Example for Analogue Sensors / CAN Sensors



- (8) Optional CAN Module for monitoring CAN systems or connecting third-party CAN sensors (9) Optional analogue input module for connecting STAUFF Sensors with sensor detection
- 10 USB host interface for connecting USB mass storage devices
- (1) Analogue third-party sensors also with high speed functionality
- 2 Power supply unit with universal country-specific adaptors, strong battery power and fast charging times, energy saving options for extended operating periods
- 3 2 x CAN bus networks, each with up to 24 channels
- 4 2 frequency inputs or D-IN/D-OUT
- (5) USB device interface for connecting to a PC, laptop, etc.
- (b) LAN interface for remote monitoring, measured value transfer or remote control

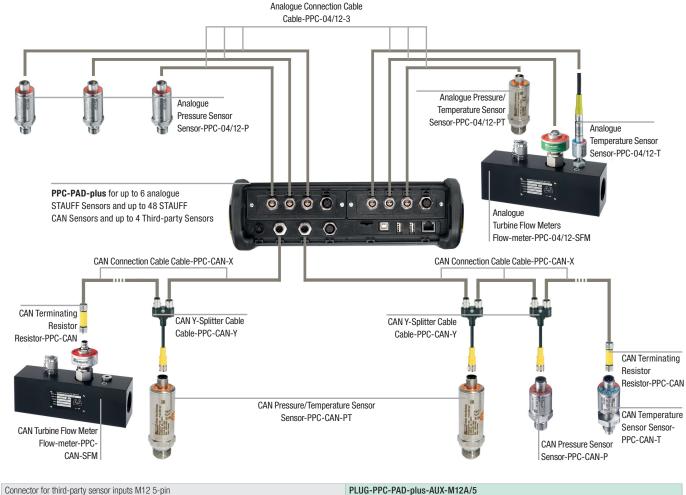

Catalogue 8 - Edition 04/2025

Hydraulic Tester • PPC-PAD-plus **Display**



R

STAUF



- . Up to 12 channels in one display
- Colour assignment for the individual channels
- Display can be changed between ACT, MIN and MAX values
- Up to 8 freely selectable channels simultaneously in one curve display
- Choose between ACT and MIN/MAX value display
- Freely scalable
- · For analysis, up to two cursors with measured value and delta value can be shown

06/04/2020 17:34 Reassign channel			45% 🖬	ß
CH. NAME	NOMINAL CH.	ACTUAL CH.	STATE	
Pressure 1	0 - 60 bar S/N 1204016617	0 - 60 bar S/N 1204016617	ОК	×
CANX-1 Pressure 2	0 - 600 bar S/N 1445133623	0 - 600 bar S/N 1445133623	ОК	
CANX-3 Pressure 3	0 - 150 bar S/N 1204016919	0 - 150 bar S/N 1204016919	ОК	
Delta Pressure	-60 - 150 bar S/N	-60 - 150 bar _{S/N}	ОК	~
Flow	0 - 600 L/min S/N 1204017305	0 - 600 L/min S/N 1204017305	ОК	
NA-3 Temperature 1	-50 - 250 °C	-50 - 250 °C	ок	

R 🖬 Edit Name Formula_01 × Formula (CH1-CH2)*CH3 4 5 6 + × + tan CH3 x² xy 1 2 3 😇 , 0 . √ 1


. Up to four measuring channels can be created

- In addition to the predefined standard functions such as


delta values or hydraulic output, it is also possible to

- · Repeating measuring tasks can be conveniently saved as a template
- A comparison of the preset measuring setup is also carried out when a template is selected
- Use of a template ensures comparability of the measurements
- · An existing template can be duplicated and modified as required





The PPC-Analyze Software that is included with the tester can display, analyse and export the recorded curves.



In addition, measurements can be shown on the monitor in real time using WIFI, Ethernet or USB.

Standar イ・Tri -7 45.558 Pressure 1 45.912 0.28 0.78 Pressure 2 11 m 99.24 ba 99.44 Pressure 3 CANX-5 Flow 381.33 382.11 Temperature 1 22.54 ť. Temperature 2 88.93 89.24 1.

- Numerical display of 6 channels with bar chart
- Display of the measuring range, freely definable warning and alarm values (red, yellow, green) and min/max values



. . . cii Mengetik Ciii 🕰 🛄 🕨







35


R TALIFI

Pressure Sensor - Type Sensor-PPC-04/12-P




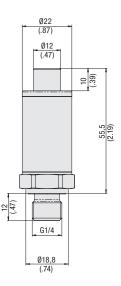





SAD-20/12-B-W3





SAD-20/10-B-W3

Product Description

B

The Pressure Sensor-PPC-04/12-P can be used with all analogue Hydraulic Testers of the PPC series, due to their 5-pin connection. Due to their sturdy Stainless Steel design, the quick response times (< 1 ms) and the high accuracy $(\pm 0,25\%)$ FS* tvp.) with automatic sensor recognition, the Pressure Sensors are a reliable and flexible solution for the Hydraulic Testers of the PPC series.

Note: A Connection Cable-PPC-04/12-3 (3 m / 9.84 ft) is needed to connect the Pressure Sensor-PPC-04/12-P to the current Hydraulic Testers. An Extension Cable-PPC-04/12-5-EXT (5 m / 16.40 ft) is also available as an option. See page 46 for further information.

Sensor-PPC-04/12-P					
Pressure Measurement	yes				
Temperature Measurement	no				
Process Connection	G1/4				
Туре	analogue 5-pin connection				

Technical Data

- Sturdy Stainless Steel housing (1.4301)
- FKM (Viton®) gasket
- Weight: 85 g / .19 lbs
- Suitable for gases and liquids (in the case of aggressive media, please contact STAUFF)

100

1 ms

< 0,2 % FS* /a

- 5-pin connection
- Pressure connection G1/4 (without adaptor)

Ambient Conditions

- -25 °C ... +105 °C /-13 °F ... +221 °F · Media temperature: -25 °C ... +85 °C / -13 °F ... +185 °F
- Ambient temperature: -25 °C ... +85 °C / -13 °F ... +185 °F Storage temperature:
- Load cycles (10⁶):

Electrical Data


•	Input voltage:	9	36 V DC
•	Output signal:	0	3 V DC

- Output signal:
- Response time:
- Long-term stability: · Vibration loading:
- acc. to IEC 60068-2-6 (20 g) Shock loading: acc. to IEC 60068-2-27 (50 g)

Protection Rating

· IP 54 protection rating: Dust protected and protected against splashing water

Order Codes

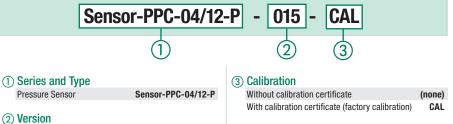

See table

Pressure Range and Accuracies

Version	Pressure Range and Accuracies						
Sensor- PPC-04/12-P-	Pressure Measuring Range (^{bar} / _{PSI})	Type of Measurement	Maximum Pressure (^{bar} / _{PSI})	Burst Pressure (^{bar/} PSI)	Accuracy (±% FS*) typ.	Accuracy (±% FS*) max.	
015	-1 15	Relative	30	150	0,25	0,5	
115	-14.5 217	pressure	435	2175			
060	0 60	Absolute	120	500	0,25	0,5	
	0 870	pressure	1740	7251			
150	0 150	Absolute	300	900	0,25	0,5	
	0 2175	pressure	4351	13053			
400	0 400	Absolute	800	1200	0.25	0,5	
	0 5801	pressure	11603	17404	0,25		
600	0 600	Absolute	1200	1800	0.25	0,5	
	0 8702	pressure	17404	26106	0,25		
601	0 600 **	Absolute	1200	2500	0.05	0,5	
	0 8702	pressure	17404	36259	0,25		

* FS = Full Scale

** Pressure peaks up to 1000 bar / 14503 PSI

Connection Adaptors for PPC Sensors

In addition to the Pressure Sensors, different adaptors and adaptor sets are available that not only connect to the STAUFF Test 20 (SDA-20-G1/4-W3), but also to the Test Couplings


of the STAUFF Test 15/12/10 series (SAD-20/15-B-W3, SAD-20/12-B-W3, SAD-20/10-B-W3). For further information please see Catalogue 7 - STAUFF Test.



Hydraulic Testers

B

CAN Pressure Sensor • Type Sensor-PPC-CAN-P

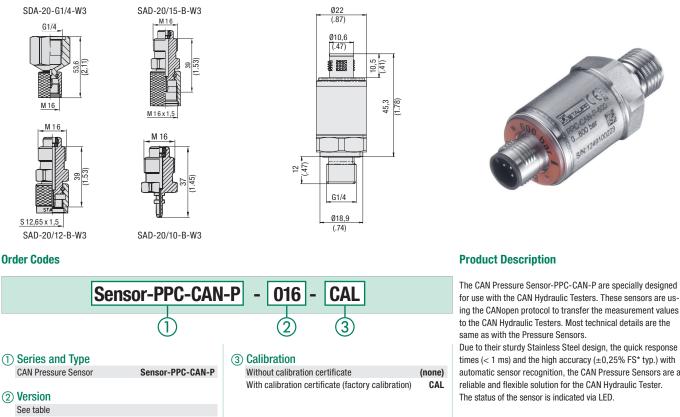

Pressure Range and Accuracies

Version	Pressure Range an	d Accuracies					
Sensor- PPC-CAN-P-	Pressure Measuring Range (^{bar} / _{PSI})	Type of Measurement	Maximum Pressure (^{bar} / _{PSI})	Burst Pressure (^{bar} / _{PSI})	Accuracy (±% FS*) typ.	Accuracy (±% FS*) max.	
016	-1 16	Relative	32	150	0.25	0.5	
010	-14.5 232	pressure	464	2175	0,25	0,5	
060	0 60	Absolute	120	500	0.25	0,5	
060	0 870	pressure	1740	7251	0,20	0,5	
160	0 160	Absolute	320	900	0.25	0,5	
100	0 2320	pressure	4641	13053	0,25	0,0	
400	0 400	Absolute	800	1200	0.25	0,5	
400	0 5801	pressure	11603	17404	0,20	0,0	
600	0 600	Absolute	1200	1800	0.25	0.5	
000	0 8702	pressure	17404	26106	0,20	0,5	
601	0 600 **	Absolute	1200	2500	0.25	0.5	
001	0 8702	pressure	17404	36259	0,20	0,5	
* FS = Full Sca	le		**Pressure pea	ks up to 1000 bar / 1	4503 PSI		

Connection Adaptors for PPC Sensors

In addition to the CAN Pressure Sensors, different adaptors and adaptor sets are available that not only connect to the STAUFF Test 20 (SDA-20-G1/4-W3), but also to the Test

Couplings of the STAUFF Test 15/12/10 series (SAD-20/15-B-W3, SAD-20/12-B-W3, SAD-20/10-B-W3). For further information please see Catalogue 7 - STAUFF Test.

automatic sensor recognition, the CAN Pressure Sensors are a

Connecting the CAN Pressure Sensor to the CAN Hydraulic Tester a CAN Connection Cable and a CAN Terminating Resistor is needed. See page 47 for further information.

Sensor-PPC-CAN-P	
Pressure Measurement	yes
Temperature Measurement	no
Process Connection	G1/4
Туре	CAN connection 5-pin, M12x1

Technical Data

- Sturdy Stainless Steel housing (1.4301)
- FKM (Viton®) gasket)
- Sensor identification LED
- Weight: 85 g / .19 lbs
- Suitable for gases and liquids (in the case of aggressive media, please contact STAUFF)
- 5-pin connection plug
- Pressure connection G1/4 (without adaptor)

Ambient Conditions

- -25 °C ... +105 °C /-13 °F ... +221 °F Media temperature:
- -25 °C ... +85 °C / -13 °F ... +185 °F Ambient temperature:
- Storage temperature: -25 °C ... +85 °C / -13 °F ... +185 °F
- Load cycles (10⁶): 100

CANopen Interface

- CANopen protocol profile DS406 v3.2
- with manufacturer-specific additions
- LSS service DS305 v2.0

Electrical Data

- Response time: 1 ms
- Long-term stability: < 0,2 % FS* /a
- acc. to IEC 60068-2-6 (20 g) · Vibration loading: Shock loading:
 - acc. to IEC 60068-2-27 (50 g)

Protection Rating


· IP 67 protection rating: Dust tight and protected against splashing water


Dimensional drawings: All dimensions in mm (in).




Temperature Sensor - Type Sensor-PPC-04/12-T







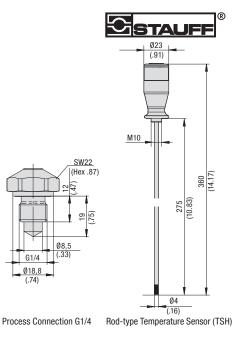

Product Description

B

The Screw-in Temperature Sensor-PPC-04/12-T measure current temperature directly in the pipeline and are compatible with the Flow Turbine Flow-meter-PPC-04/12-SFM and the Straight Threaded Joint SGV-16S-G-W3 (only process connection M10x1, see figure below).


See product information of Flow Turbine on page 42.

The Rod-type Temperature Sensor-PPC-04/12-TSH is especially designed to determine the media temperatures in tanks and containers.

Note: A Connection Cable-PPC-04/12-3 (3 m / 9.84 ft) is needed to connect the Temperature Sensor-PPC-04/12-T or -TSH to the current Hydraulic Testers. An Extension Cable-PPC-04/12-5-EXT (5 m / 16.40 ft) is also available as an option. See page 46 for further information.

Sensor-PPC-04/12-T	
Pressure Measurement	по
Temperature Measurement	yes
Process Connection	M10x1 or G1/4
Туре	analogue 5-pin connection

Sensor-PPC-04/12-T-M02 with SGV-16S-G-W3





Order Codes



(1) Series and Type	
Temperature Sensor	Sensor-PPC-04/12
(2) Version	
Screw-in	Т
Rod-type	TSH

Screw-in Temperature Sensor (T) Process Connection M10x1

③ Process Connection (only for Version T) M10x1 M02 G1/4 **B04**

CAL

(4)

-40 °C ...+150 °C / -40 °F ... +302 °F

.33)

G1/4 Ø18,8 (.74)

(4) Calibration

Measuring Range

Measuring range (T):

Burst pressure (T):

Accuracy:

Electrical Data

Input signal:

Output signal:

Response time (T)

Response time (TSH):

M02 (M10x1):

Vibration loading:

Shock loading:

Protection Rating

B04 (G1/4).

Ŀ		
	Without calibration certificate	(none)
	With calibration certificate (factory calibration)	CAL

Measuring range (TSH): -25 °C ... +125 °C / -13 °F ... +257 °F

±1 % FS

7 ...12 V DC

 $T_{50} \le 4 \text{ s}, T_{90} \le 14 \text{ s}$

 $T_{50} \le 4 \text{ s.} T_{90} \le 12 \text{ s}$

against splashing water

acc. to IEC 60068-2-6 (20 g) acc. to IEC 60068-2-27 (50 g)

0 ... 3 V DC

 $T_{^{90}} \leq 9,1~s$

IP 54 protection rating: Dust protected and protected

2150 bar / 31183 PSI

• Operating pressure (T): 630 bar / 9137 PSI Maximum pressure (T): 800 bar / 11603 PSI

Technical Data

Suitable for liquids

(in the case of aggressive media please contact STAUFF) 5-pin connection

Stainless Steel

FKM (Viton®)

Materials

Housing (T):

Handle (TSH):

 Gaskets (T): Bod (TSH):

Stainless Steel 1.4304 Delrin

Weight

 Screw-in (T) M02 (M10x1): 70 g / .15 lbs B04 (G1/4): 55 g / .12 lbs Rod-type (TSH): 120 g / .26 lbs

Connection

- STAUFF Test connection SGV-16S-G-W3 in the pipeline (only M10x1)
- Screw-in thread (T): M10x1 or G1/4 (see figure) Screw-in thread (TSH): M10

Ambient Conditions (Screw-in Temperature Sensor)

- Media temperature: -40 °C ...+150 °C / -40 °F ... +302 °F
- Ambient temperature: -40 °C ... +85 °C / -40 °F ... +185 °F
- Storage temperature: -40 °C ... +85 °C / -40 °F ... +185 °F

Ambient Conditions (Rod-type Temperature Sensor)


- -25 °C ... +125 °C / -13 °F ... +257 °F Media temperature:
- Ambient temperature: -25 °C ... +70 °C / -13 °F ... +158 °F -25 °C ... +80 °C / -13 °F ... +176 °F
- Storage temperature:


Dimensional drawings: All dimensions in mm (in).




В









Ø22



Product Description

The CAN Temperature Sensor-PPC-CAN-T are specially designed for use with the CAN Hydraulic Testers. This sensor is using the CANopen protocol to transfer the measurement values to the CAN Hydraulic Testers. The Sensor-PPC-CAN-T is compatible with the CAN Flow Turbine Flow-meter-PPC-CAN-SFM and the Straight Threaded Joint SGV-16S-G-W3 (only process connection M10x1, see figure below). See product information of CAN Flow Turbine on page 43.

Most technical details are the same as with the Temperature Sensor-PPC-04/12-T.

Due to their sturdy Stainless Steel design with automatic sensor recognition, the CAN Temperature Sensor is a reliable and flexible solution for the CAN Hydraulic Tester. The status of the sensor is indicated via LED.

Connecting the CAN Temperature Sensor to the CAN Hydraulic Tester a CAN Connection Cable and a CAN Terminating Resistor is needed. See page 47 for further information.


Concor DDC CAN T


JEIISUI-FF G-GAN-I	
Pressure Measurement	no
Temperature Measurement	yes
Process Connection	M10x1 or G1/4
Туре	CAN connection 5-Pin, M12x1


Sensor-PPC-CAN-T-M02 with SGV-16S-G-W3

For further information please see Catalogue 7 - STAUFF Test.









Process Connection M10x1

Process Connection G1/4

Order Codes



4

T.

(1) Series and Type **CAN** Temperature Sensor

Sensor-PPC-CAN

(3) Process Connection (only for Version T) M02 M10x1

G1/4		
Calibration		

Without calibration certificate (none) With calibration certificate (factory calibration) CAL

Technical Data

(2) Version

Screw-in

Suitable for liquids

(in the case of aggressive media please contact STAUFF)

- 5-pin connection plug
- Sensor identification LED

Materials

Housing: Stainless Steel Gaskets: FKM (Viton®)

Weight

M02 (M10x1): 70 a / .15 lbs 55 g / .12 lbs

B04 (G1/4):

Ambient Conditions

- -40 °C ...+150 °C / -40 °F ... +302 °F · Media temperature:
- -40 °C ... +85 °C / -40 °F ... +185 °F Ambient temperature: -40 °C ... +85 °C / -40 °F ... +185 °F
- Storage temperature:

Measuring Range

- Measuring range: Operating pressure: 630 bar / 9137 PSI
- Maximum pressure:
- 800 bar / 11603 PSI Burst pressure: 2150 bar / 31183 PSI ±0,66 % FS

-40 °C ...+150 °C / -40 °F ... +302 °F

Accuracy:

- **CANopen Interface**
- CANopen protocol profile DS301, Typ 2.0A with manufacturer-specific additions
- LSS service DS305 v2.0

Electrical Data Output signal: Response time

CAN bus

 $T_{50} \le 4 \text{ s}, T_{90} \le 12 \text{ s}$

 $T_{50} \le 4 \text{ s}, T_{90} \le 14 \text{ s}$

acc. to IEC 60068-2-6 (20 g)

acc. to IEC 60068-2-27 (50 g)

- M02 (M10x1):
- B04 (G1/4):
- Vibration loading: Shock loading:

Protection Rating

· IP 67 protection rating: Dust tight and protected against splashing water




B04


B




Pressure / Temperature Sensor • Type Sensor-PPC-04/12-PT







M16





SAD-20/10-B-W3

Product Description

The Pressure / Temperature Sensor-PPC-04/12-PT can be used with all Hydraulic Testers of the PPC series, due to the 5-pin connection. This sensor is able to measure and display temperatures on the Hydraulic Testers.

Due to their sturdy Stainless Steel design, the quick response time (< 1 ms) and the high accuracy ($\pm 0,25\%$ FS* typ.) with automatic sensor recognition, the Pressure / Temperature Sensor is a reliable and flexible solution for the Hydraulic Testers of the PPC series.

Note: A Connection Cable-PPC-04/12-3 (3 m / 9.84 ft) is needed to connect the Pressure / Temperature Sensor to the current Hydraulic Testers. An Extension Cable-PPC-04/12-5-EXT (5 m / 16.40 ft) is also available as an option. See page 46 for further information.

Sensor-PPC-04/12-PT-Pressure Measurement ves **Temperature Measurement** yes **Process Connection** G1/2 analogue 5-pin connection Туре

Technical Data

- Sturdy Stainless Steel housing (1.4301)
- FKM (Viton®) gasket
- Weight: 200 g / .44 lbs
- Suitable for gases and liquids (in the case of aggressive media, please contact STAUFF)

100

-25 °C ... +105 °C /-13 °F ... +221 °F

0°C ... +85°C / +32°F ... +285°F

- 5-Pin connection
- Pressure connection G1/2 (without adaptor)

Ambient Conditions

- Media temperature:
- Ambient temperature: -25 °C ... +85 °C / -13 °F ... +185 °F -25 °C ... +85 °C / -13 °F ... +185 °F
- Storage temperature:
- Compensated range: Load cycles (10⁶):


Electrical Data

- Input voltage: 7 ... 12 V DC • Output signal: 0 ... 3 V DC
- Response time:
- 1 ms Long-term stability: < 0,2 % FS* /a
- Vibration loading:
- acc. to IEC 60068-2-6 (20g) Shock loading: acc. to IEC 60068-2-27 (50g)

Protection Rating

IP 54 protection rating: Dust protected and protected against splashing water

Order Codes



(1) Series and Type Pressure / Temperature Sensor Sensor-PPC-04/12-PT

③ Calibration

S 12,65 x 1,5

SAD-20/12-B-W3

Without calibration certificate (none) With calibration certificate (factory calibration) CAL

② Version

See table

Pressure Range and Accuracies

Version	Pressure Range	e and Accura	cies						
Sensor- PPC-04/12-PT-			Accuracy (±% FS*) max.	Temperature Measuring Range (°C/°F)	(±% FS*)				
015/2	-1 15	Relative	30	150	0.25	0,5	-25 105	1,5	
015/2	-14.5 217	pressure	435	2175 0,25		0,5	-13 221	1,0	
060/2	0 60	Absolute	120	500	0,25	0,5	-25 105	1,5	
000/2	0 870	pressure	1740	7251	0,20	0,5	-13 221	1,0	
150/2	0 150	Absolute	300	900	0.25	0,5	-25 105	1,5	
150/2	0 2175	pressure	4351	13053	0,20	0,5	-13 221	1,5	
400/2	0 400	Absolute	800	1200	0,25	0,5	-25 105	1,5	
400/2	0 5801	pressure	11603	17404	0,20	0,5	-13 221	1,5	
600/2	0 600	Absolute	1200	1800	0,25	0.5	-25 105	1.5	
000/2	0 8702	pressure	17404	26106	0,20	0,5	-13 221	1,5	
601/2	0 600 **	Absolute	1200	2500	0,25	0.5	-25 105	1 5	
001/2	0 8702	pressure	17404	36259	0,20	0,5	-13 221	1,5	


Connection Adaptors for PPC Sensors

In addition to the Pressure / Temperature Sensors, different adaptors and adaptor sets are available that not only connect to the STAUFF Test 20 (SDA-20-G1/2-W3), but also to the Test For further information please see Catalogue 7 - STAUFF Test.

Couplings of the STAUFF Test 15/12/10 series (SAD-20/15-B-W3, SAD-20/12-B-W3, SAD-20/10-B-W3).



B

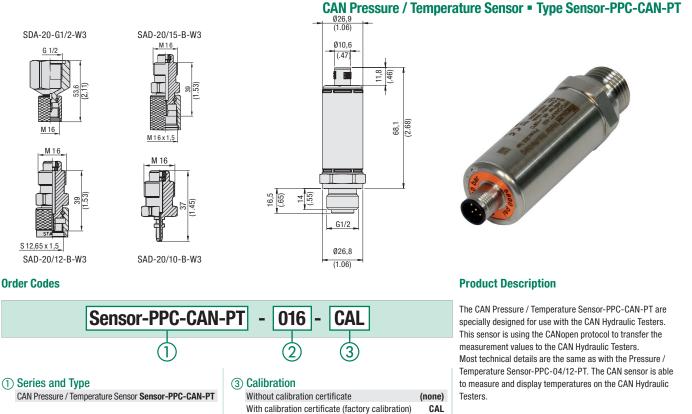

② Version

See table

Pressure Range and Accuracies

Version	Pressure Range	and Accura	cies						
Sensor- PPC-CAN-PT-	Pressure Measuring Range (^{bar} / _{PSI})	Type of Measure- ment	Maximum Burst Pressure (±% FS*) (^{bar/} Psi) (^{bar/} Psi) typ.		Accuracy (±% FS*) max.	Temperature Measuring Range (°C/°F)	Accuracy (±% FS*)		
016	-1 16	Relative	32	150	0,25	0.5	-25 105	±2K typ./	
010	-14.5 232	pressure	464	2175	0,20	0,0	-13 221	±3K max.	
060	0 60	Absolute	120	500	0,25	0,5	-25 105	±2K typ./	
000	0 870	0 870 pressure	1740	7251	0,20	0,5	-13 221	±3K max.	
100	0 160	Absolute	320	900	0,25	0,5	-25 105	±2K typ./ ±3K max.	
160	0 2320	pressure	4641	13053	0,20	0,0	-13 221		
400	0 400	Absolute	800	1200	0,25	0.5	-25 105	±2K typ./ ±3K max.	
400	0 5801	pressure	11603	17404	0,23	0,5	-13 221		
600	0 600	Absolute	1200	1800	0.05	0.5	-25 105	±2K typ./	
600	0 8702	pressure	17404	26106	0,25	0,5	-13 221	±3K max.	
601	0 600 **	Absolute	1200	2500	0.05	0.5	-25 105	±2K typ./	
601	0 8702	pressure	17404	36259	0,25	0,5	-13 221	±3K max.	

* FS = Full Scale

** Pressure peaks up to 1000 bar / 14503 PSI

Connection Adaptors for PPC Sensors

In addition to the CAN Pressure / Temperature Sensors, different adaptors and adaptor sets are available that not only connect to the STAUFF Test 20 (SDA-20-G1/2-W3), but also to the Test Couplings of the STAUFF Test 15/12/10 series (SAD-20/15-B-W3, SAD-20/12-B-W3, SAD-20/10-B-W3). For further information please see Catalogue 7 - STAUFF Test.

Due to their sturdy Stainless Steel design, the quick response time (< 1 ms) and the high accuracy (\pm 0,25% FS* typ.) with automatic sensor recognition, the pressure / temperature sensor is a reliable and flexible solution for the CAN Hydraulic Tester. The status of the sensor is indicated via LED.

Connecting the CAN Pressure / Temperature Sensor to the CAN Hydraulic Tester a CAN Connection Cable and a CAN Terminating Resistor is needed. See page 47 for further information.

PPC-CAN-PT	
Pressure Measurement	yes
Temperature Measurement	yes
Process Connection	G1/2
Туре	CAN connection 5-pin, M12x1

Technical Data

- Sturdy Stainless Steel housing (1.4301)
- FKM (Viton®) gasket
- Sensor identification LED
- Weight: 200 g / .44 lbs
- Suitable for gases and liquids (in the case of aggressive media, please contact STAUFF)
- 5-pin connection plug
- Pressure connection G1/2 (without adaptor)

Ambient Conditions

Media temperature: -25 °C ... +105 °C /-13 °F ... +221 °F
 Ambient temperature: -25 °C ... +85 °C / -13 °F ... +185 °F

100

- Ambient temperature: -25 °C ... +85 °C / -13 °F ... +185 °F
 Storage temperature: -25 °C ... +85 °C / -13 °F ... +185 °F
- Compensated range: 0°C ... +85 °C / +32 °F ... +185 °F
- Load cycles (10⁶):

CANopen Interfaces

- CANopen protocol profile DS406 v3.2
- with manufacturer-specific additions
- LSS service DS305 v2.0

Electrical Data

- Response time: 1 ms
 Vibration loading: acc. to IEC 60068-2-6 (20g)
- Shock loading: acc. to IEC 60068-2-27 (50g)

Protection Rating


 IP 67 protection rating: Dust tight and protected against splashing water


Dimensional drawings: All dimensions in mm (in).



Flow Turbine • Type Flow-meter-PPC-04/12-SFM



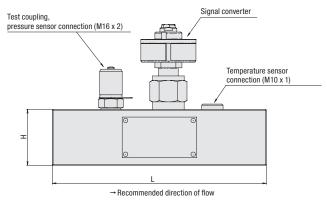



Product Description

The Flow-meter-PPC-04/12-SFM Flow Turbine is permanently installed in the pipeline. The oil flow rotates the internal axial turnine. The frequencies generated are processed by digital electronics (a signal converter). Interferences caused by flow effects are compensated by this process.

The signal converter is now directly integrated into the Flow Turbine. This allows even simpler operation and supports permanent coupling of the turbine and signal converter components that are matched to one another.


The Flow Turbine also improves the response time (from previously 400 ms to 50 ms) and increases the measuring accuray.

The Flow-meter-PPC-04/12-SFM is available in five versions for various flow speeds. A Pressure Sensor-PPC-04/12-P (see page 36) can be connected in parallel to the Flow Turbine by way of the integrated test coupling. In addition, the oil temperature can also be measured using the connection of the Temperature Sensor-PPC-04/12-T (see page 38).

In general, the Flow Turbine can handle flows in either direction. The specified technical data and the calibration (available as an option) apply only when the flow through the Flow Turbine matches the recommended flow direction. A double-headed arrow is shown on the nameplate of the Flow-meter-PPC-04/12-SFM. The thicker end of the double-headed arrow specifies the recommended direction of flow.

Note: A Connection Cable-PPC-04/12-3 (3 m / 9.84 ft) is needed to connect the Flow Turbine to the current Hydraulic Testers. An Extension Cable-PPC-04/12-5-EXT (5 m / 16.40 ft) is also available as an option. See page 46 for further information.

Order Codes

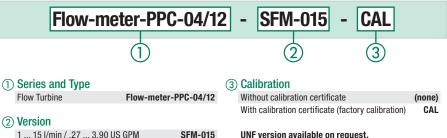

SFM-015 1 ... 15 l/min / .27 ... 3.90 US GPM 3 ... 60 l/min / .79 ... 15.90 US GPM SFM-060 5 ... 150 l/min / 1.32 ... 39.60 US GPM SFM-150 SFM-300 8 ... 300 l/min / 2.11 ... 79.00 US GPM 15 ... 600 l/min / 3.96 ... 158.00 US GPM SFM-600

Technical Data

Materials

- Housing: Aluminium (black anodised)
- Gaskets: FKM (Viton®)
- 5-pin connection
- Pressure measurement SMK-20 (M16 x 2) connection:
- Temperature measurement
- connection: M10 x 1 (standard screw plug)

Ambient Conditions

- Media temperature: -20 °C ... +90 °C / -4 °F ... +194 °F
- -10 °C ... +50 °C / +14 °F ... +122 °F Ambient temperature:
- -20°C +80°C/-4°F +176°F Storage temperature:
- Permissible particle size: <10 Micron for SFM-015, <25 Micron for others
- - Viscosity range: 10 ... 100 cSt

Electrical Data

Response time: 50 ms

Process Connection

Please see table below

Protection Rating

• IP 54 protection rating: Dust protected and protected against splashing water


Dimensions and Measuring Range

Version	Measuring Range						Dimensions (^{mm} / _{in})						
Flow-meter- PPC-04/12-	Measuring Range (^{1/min} /us gpm)	Max. Flow (^{l/min} /us gpм)	Operating Pressure (^{bar} / _{PSI})	Max. Pressure (^{bar} / _{PSI})	Accuracy (at 21 cSt)	Max. Pressure Drop (at FS*) (^{bar} / _{PSI})	G ** (BSP)	G (UNF)	В	D	L	Н	Weight (^g / _{lbs})
SFM-015	1 15	16,5	350	420	±1 (% FS*)	1,5	01/0	0/4 16	37	71	136	37	650
SFINI-015	.27 3.90	4.4	5076	6091	±1(%FS)	21.8	G1/2 3/4–16	3/4-10	1.46	2.80	5.35	1.46	1.4
SFM-060	3 60	66	350	420	±1 (% of the	1,5	G3/4	1-1/16–16	62	72	190	50	750
SFINI-000	.79 15.90	17.4	5076	6091	displayed value)	21.8	63/4	1-1/10-10	2.44	2.83	7.48	1.97	1.6
SFM-150	5 150	165	350	420	±1 (% of the	1,5	G3/4	/4 1-1/16–16	62	72	190	50	750
SFIM-150	1.32 39.60	43.6	5076	6091	displayed value)	21.8			2.44	2.83	7.48	1.97	1.6
SFM-300	8 300	330	350	420	±1 (% of the	4	G1	1-5/16-16	62	76	190	50	1200
SFIM-300	2.11 79.00	87.2	5076	6091	displayed value)	58	GI	1-0/10-10	2.44	2.99	7.48	1.97	2.6
CEM 600	15 600	660	290	348	±1 (% of the	5	01 1/4	1-5/8-12	62	66	212	75	1800
SFM-600	3.96 158.00	174.4	4206	5047	displayed value)	72.5	01-1/4	1-0/0-12	2.44	2.60	8.35	2.95	4

* FS = Full Scale ** Standard option Dimensional drawings: All dimensions in mm (in).



CAN Flow Turbine • Type Flow-meter-PPC-CAN-SFM

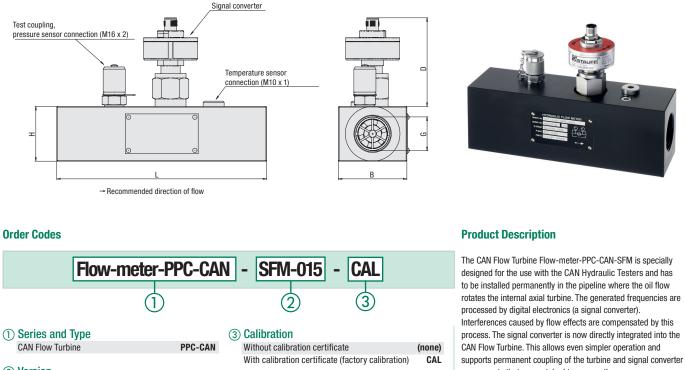

(2) Version

Technical Data

5-pin connection plug

· Pressure measurement

Temperature measurement

Materials

Housing:

Gaskets:

connection:

connection:

Ambient Conditions Media temperature:

• Ambient temperature:

Storage temperature:

Viscosity range:

~		
	1 15 l/min / .27 3.90 US GPM	SFM-015
	3 60 l/min / .79 15.90 US GPM	SFM-060
	5 150 l/min / 1.32 39.60 US GPM	SFM-150
	8 300 l/min / 2.11 79.00 US GPM	SFM-300
	15 600 I/min / 3.96 158.00 US GPM	SFM-600

FKM (Viton®)

M10 x 1 (standard screw plug)

-20 °C ... +90 °C / -4 °F ... +176 °F

-10 °C ... +50 °C / +14 °F ... +122 °F

-20°C +80°C/-4°E +176°E

<25 Micron for others

60 50 00 00 **Electrical Data** Aluminium (black anodised) Response time: 50 ms **Process Connection** Please see table below SMK-20 (M16 x 2)

Protection Rating

· IP 66 protection rating: Dust protected and protected against strong jets of water

UNF version available on request.

components that are matched to one another.

The CAN Flow Turbine also improves the response times/ reaction times (from a previous 400 ms to 50 ms) and increases measurement accuracy.

The CAN Flow Turbine is available in five versions for various flow speeds. A CAN Pressure Sensor-PPC-CAN-P (see page 37) can be connected parallel to the CAN Flow Turbine by the way of the integrated test coupling. In addition, the oil temperature can also be measured using the connection of the Temperature Sensor-PPC-CAN-T (see page 39).

In general, the CAN Flow Turbine can handle flows in either direction. The specified technical data an the calibration (available as an option) apply only when the flow through the CAN Flow Turbine matched the recommended flow direction. A double-headed arrow is shown on the nameplate of the Flow-meter-PPC-CAN-SFM. The thicker end of the double-headed arrow specifies the recommended direction of the flow.

Connecting the CAN Flow Turbine to the CAN Hydraulic Tester a CAN Connection Cable and a CAN Terminating Resistor is needed. See page 47 for further information.

Dimensions and Measuring Range

Permissible particle size: <10 Micron for SFM-015 (CAN),

10 ... 100 cSt

Version	Measuring Range	1					Dimens	sions (^{mm} / _{in})					
Flow-meter- PPC-CAN-	Measuring Range (^{I/min} /us gpm)	Max. Flow (^{I/min} / _{US GPM})	Operating Pressure (^{bar} / _{PSI})	Max. Pressure (^{bar} / _{PSI})	Accuracy (at 21 cSt)	Max. Pressure Drop (at FS*) (^{bar} / _{PSI})	G ** (BSP)	G (UNF)	В	D	L	н	Weight (⁹ / _{lbs})
SFM-015	1 15	16,5	350	420	±1 (% FS*)	1,5	G1/2	3/4-16	37	78,8	136	37	650
36101-015	.26 3.90	4.4	5076	6091	±1 (% F3)	21.8	61/2	3/4-10	1.46	3.10	5.35	1.46	1.43
SFM-060	3 60	66	350	420	±1 (% of the	1,5	G3/4	1-1/16-16	62	79,4	190	50	750
5-11-000	.79 15.90	17.4	5076	6091	displayed value)	I value) 21.8	63/4	1-1/10-10	2.44	3.13	7.48	1.97	1.65
CEM 150	5 150	165	350	420	±1 (% of the	1,5	G3/4	1-1/16–16	62	79,4	190	50	750
SFM-150	1.32 39.60	43.6	5076	6091	displayed value)	21.8	63/4		2.44	3.13	7.48	1.97	1.65
SFM-300	8 300	330	350	420	±1 (% of the	4	G1	1-5/16-16	62	81,3	190	50	1200
SFIVI-300	2.11 79.00	87.2	5076	6091	displayed value)	58	GI	1-0/10-10	2.44	3.20	7.48	1.97	2.65
CEM 600	15 600	660	290	348	±1 (% of the	5 e) 72.5	G1-1/4	4 1-5/8–12	62	76,2	212	75	1800
SFM-600	3.96 158.00	174.4	4206	5047	displayed value)				2.44	3	8.35	2.95	3.97

* FS = Full Scale ** Standard option

Dimensional drawings: All dimensions in mm (in).

Rotational Speed Sensor - Type Sensor-PPC-04/12-SDS-CAB










ര

TALIER



Sensor-PPC-04/12-SDS-CAB





Sensor-PPC-04/12-SDS-CAB

(none)

CAL

Product Description

B

The Sensor-PPC-04/12-SDS-CAB Rotational Speed Sensor allows non-contact speed measurement of rotating components. The sensor is based on a opto-electrical measurement principle that determines the rotational speed with highaccuracy using a reflecting strip on the shaft.

The contact rotational speed measurement is obtained by using a Contact Adaptor that is mounted to the sensor, and which makes contact with the rotating component during measurement.

This also produces high-accuracy measurement results. In the case of espacially small areas, using the focusing adaptor facilities measurement.

Note: The analogue Rotational Speed Sensor-PPC-04/12-SDS-CAB can only be used with analogue Hydraulic Testers.

Technical Data

- Material:
- ABS · Weight: 230 g / .51 lbs
- 5-pin connection
- · Both contacting and non-contacting measurement possible

20 ... 10000 1/min

±45°C

±5 1/min

 $\leq \pm 0,5$ % FS*

25 ... 500 mm (1 ... 20 in)

• Type of measurement: optical, red LED

Ambient Conditions

- 0°C ... +70°C / +32°F ... +158°F • Ambien temperature:
- **Measuring Range**
- · Measuring range:
- Measuring distance:
- Measuring angle:
- Accuracy:
- Resolution:

Electrical Data

0 ... 3 V DC Output signal: Input signal: 7 ...12 V DC

Note: We recommended not extending the 3 m / 9.84 ft permanent cable connection provided on the sensor!

Order Codes



(1) Series and Type Rotational Speed Sensor

(2) Calibration

Order Codes

Focus Adaptor




Adaptor-PPC-04/12-SFA-focus

T

Adaptor-PPC-04/12-SFA-focus

Contact Adaptor



Contact Adaptor Adaptor-PPC-04/12-SKA-contact

Applications Examples

(1) Series and Type

Focus Adaptor

Fig. 1 -Contacting rotational speed measurement with the contact adaptor





Fig. 2 -

End face rotational speed measurement with the contact adaptor



Fig. 3 -Rotating shaft / non-contacting rotational speed measurement using the focusing adaptor and marking strip








Current/Voltage/Frequency Converter - Type Sensorconverter-PPC

Product Description

with the Hydraulic Tester.

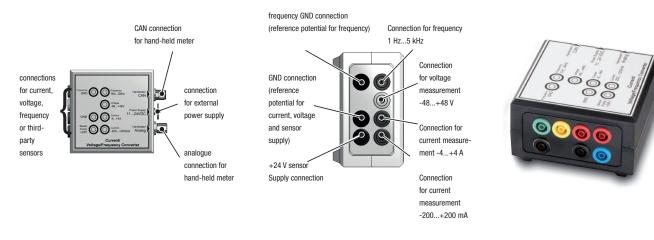

Order Codes



(1) Series and Type

Current/Voltage/Frequency Converter

Analogue Signal Measurement

Measuring of electric signals from a third-party sensor (e.g. 4 - 20 mA, 0 - 10 V) with the Sensorconverter-PPC.

The Sensorconverter-PPC is used, for example, for to measurue the current consumption on proportional valves or for determining the switching statuses of motors or pumps. This allows the PPC testers to read these third-party sensors. Typical applications for generating and measuring a force/displacement diagram or torque/volumetric flow characteristic curves.

The following input signals can be processed:

 Voltage (DC) 	-48 V+48 V CAN: ±0.5% FS;
 Current (DC) 	Analogue: ±1% FS -200 mA+200 mA
ourient (bo)	CAN: ±0.5% FS;
	Analogue: ±1% FS
 Current (DC) 	-4+4 A
	±1.5% FS
 Long term stability 	0.1% span/a

Frequency Signal Measurement

Measuring of electric frequencies from a third-party sensor

The Sensorconverter-PPC is used to make frequency signals (e.g. from turbine flow meters, volumetric flow meters and speedometers) measurable for PPC Hydraulic Testers. The adaptor can process sinusoidal and square signals from 1 Hz to 5 kHz with amplitudes from 100 mV to 24 V.

The following input signals can be processed:

Frequency	15000 Hz; 100 mV24 V
	CAN: ±0.1% FS @ < 100 Hz
	CAN: ±0.5% FS @ > 100 Hz
	Analogue: ±1%
 Long term stability 	0.1% span/a

Specifications

Sensorconverter-PPC

Dimensions:	100x100x61 mm
Material:	ABS
Weight:	240 g
 Operating temperature 	0+60 °C
 Storage temperature 	-20+85 °C
 Rel. humidity 	< 80 °C
 Protection rating 	IP40 (EN 60529)
External power supply Power supply	1130 V DC
Rower supply for third-party s	oncor (aslvanically icolato


The PPC Sensor Converter offers users the option of connecting

third party sensors to the PPC Hydraulic Tester which are not equipped with a STAUFF sensor detection. These can have different output levels and can therefore also be easily measured


Power supply for third-party sensor (galvanically isolated) Voltage 24 V DC ±2 V

	voltage	24 V DC ±2 V
•	Current without PSU	max. 50 mA
•	Current with PSU	max. 100 mA


Connection example for voltage measurement



Connection example for pressure sensor 600 bar, 0...20 mA



Connection example for flow meter 160 l/min, 1 kHz



The measured data are transferred to the Hydraulic Testers directly with the normal CAN or analogue Connection Cables.





Connection and Extension Cables (analogue)





Connection Cable-PPC-04/12-3 Extension Cable-PPC-04/12-5-EXT

Product Description


Different Connection and Extension Cables for all Hydraulic Testers of the PPC series are available. These cables on the one hand, connect the sensors to the Hydraulic Testers and on the other hand connect the Hydraulic Testers with a PC or laptop. The following items are available:

Connection and Extension Cables

A Cable-PPC-04/12-3 Connection Cable is required to connect the sensors to the current Hydraulic Testers PPC-04/06/08-plus or PPC Pad. The cable comes with a 5-pin push/pull connection at each end and has a length of 3 m / 9.84 ft.

Note: This cable cannot be used with older Hydraulic Testers and/or sensors (with 4-pin connection)! The Cable-PPC-04/12-5-EXT Exentsion Cable has a length of 5 m/16 ft. Note: Please keep in mind that it is generally recommended not to exceed a total cable length of 8 m / 26.25 ft!


Order Codes







CAN Accessories

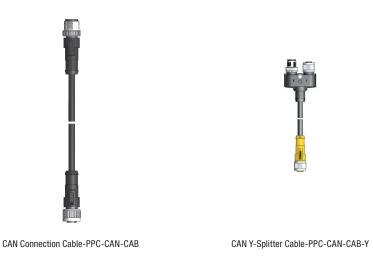

CAN Terminating Resistor-PPC-CAN

Product Description

To connect the CAN bus sensors to the CAN Hydraulic Testers are different cable lengths are available, depending on customers requirements. The CAN sensors work on a bus system as displayed in the connection overview on page 27. All connections are 5-pin connection plugs. The following items are available:

CAN Connection Cable

CAN Y-Splitter Cable

The CAN Connection Cable is available in different lengths between 0,5 m / 1.64 ft and 20 m / 65.62 ft.

Order Codes

Cable-PPC-CAN	-	2	
(1)		(2)	

To connect a new sensor to the CAN bus, a CAN Y-Splitter Cable is necessary.

Order Code





Each sensor on the end of a CAN bus has to be closed with

a CAN Terminating Resistor. The resistor is also necessary

CAN Terminating Resistor

when only one sensor is used.

(1) Series and Type	
CAN Connection Cable	Cable-PPC-CAN
(2) Length	
0.5 m / 1.64 ft	0.5

0,5 m / 1.64 ft	0.5
2 m / 6.65 ft	2
5 m / 16.40 ft	5
10 m / 32.81 ft	10

(1) Series and Type CAN Y-Splitter Cable 0,3 m / .98 ft Cable-PPC-CAN-Y

(1) Series and Type CAN Terminating Resistor Resistor-PPC-CAN-R

PPC Complete Systems for analogue Hydraulic Testers PPC-04-plus / PPC-PAD-light



Complete System PPC-04-plus-SET (PPC-04-plus)

Product Description

The PPC complete systems are assembled in different versions according to customer requirements. All complete systems are supplied in a handy case with customised foam inserts and offer space for the components listed below:

Components

Standard Options for Complete Systems PPC-04-plus

- 1x Case-PPC-04-plus/PAD-light
- 1x Hydraulic Tester PPC-04-plus
- 1x Power supply incl. country-specific adaptor Power-Supply-PPC-PAD-light
- Up to 3 Pressure Sensor-PPC-04/12-P with installed adaptors for STAUFF Test 20 (M16 x 2)
- 1x Temperature Sensor-PPC-04/12-T-M02
- with installed SGV-16S-G-W3 (optional)
- Up to 2 connection cables (3 m / 9.84 ft)
- 3x Adaptors SAD for the STAUFF Test 15/12/10 series
- 1x USB cable 1m (USB A to Micro-USB)
- 1x Quick guide with link to: PC software and instructions

Standard Options for Complete Systems PPC-PAD-light


- Ix Case-PPC-04-plus/PAD-light
- 1x Hydraulic Tester PPC-PAD-light
 1x Power supply incl. country-specific adaptor
- Power-Supply-PPC-PAD-light
- Up to 3 Pressure Sensors with installed adaptors STAUFF Test 20 (M16 x 2)
- 1x Temperature Sensor-PPC-04/12-T-M02 with installed SGV-16S-G-W3 (optional)
- Up to 4 connection cables (3 m / 9.84 ft)
- 3x Adaptors SAD for the STAUFF Test 15/12/10 series
- 2x USB cable 1m (USB A to Micro-USB)
- Ix Quick guide with link to: PC software and instructions





Complete System PPC-PAD-light-SET (PPC-PAD-light)

Order Codes

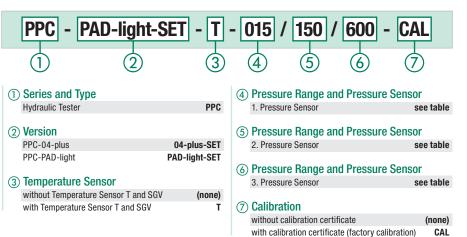

Pressure Range and Pressure Sensor

Pressure Range	Pressure Sensor	Pressure Sensor		
000	When ordering a complete system with one or two pressure sensors, specify "000" for the pressure range of the 2. and / or 3. pressure sensors.			
015				
060				
150	Pressure Range	Pressure Range	Pressure Range	
400	1. Pressure Sensor	2. Pressure Sensor	3. Pressure Sensor	
600				
601				
z.B.	015 (15 bar)	060 (60 bar)	000 (0 bar)	
Please keep in mind measurements.	that two pressure sensors with identic	al measuring ranges are necessary for	differential pressure	

Alternative

If you need more space in the case for your components, STAUFF offers the **Case-PPC-PAD-plus** as an alternative. This can hold several measuring devices at the same time and offers a variety of storage options (at least 9 pressure sensors and 2 flow turbines and much more). The case is only available individually. The contents must be ordered separately.





PPC Complete Systems for CAN Hydraulic Testers PPC-04-CAN / PPC-PAD-light-CAN





Complete System PPC-PAD-light-CAN-SET (PPC-PAD-light-CAN)

Complete System PPC-04-plus-CAN-SET (PPC-04-plus-CAN)

Order Codes

PPC - PAD-light-CAN-X-SET 160 / 400 / T -600 -CAL 4 5 6

(1) Series and Type Hydraulic Tester

(2) Version PPC-04-plus-CAN 04-plus-CAN-SET PPC-PAD-light-CAN PAD-light-CAN-SET

PPC-PAD-light-CAN-AUX PAD-light-CAN-X-SET

③ CAN Temperature Sensor

without CAN Temperature Sensor T and SGV (ohne) with CAN Temperature Sensor T and SGV

- (4) Pressure Range and Pressure Sensor 1. CAN Pressure Sensor see table
- (5) Pressure Range and Pressure Sensor 2. CAN Pressure Sensor see table
- (6) Pressure Range and Pressure Sensor see table 3. CAN Pressure Sensor
- (7) Calibration without calibration certificate (ohne) with calibration certificate (factory calibration) CAL

Product Description

The PPC complete systems are assembled in different versions according to customer requirements. All complete systems are supplied in a handy case with customised foam inserts and offer space for the components listed below:

Components

Standard Options for Complete Systems PPC-04-plus-CAN

- 1x Case-PPC-04-plus/PAD-light
- Ix Hydraulic Tester PPC-04-plus-CAN
- 1x Power Supply incl. country-specific Adaptor
- Up to 3 CAN Pressure Sensor-PPC-CAN-P with installed Adaptors for STAUFF Test 20 (M16 x 2)
- CAN Temperature Sensor-PPC-CAN-T-M02 with installed SGV-16S-G-W3 (optional)
- Up to 3 CAN Connecting Cables
- Up to 2 CAN Y-Splitter Cables
- 1x CAN Terminating Resistor
- 3x Adaptors SAD for the STAUFF Test 15/12/10 series (standard for all PPC complete systems)
- 1x USB cable 1m (USB A to Micro-USB)
- Ix Quick guide with link to: PC software and instructions

Standard Options for Complete Systems

- PPC-PAD-light-CAN or PPC-PAD-light-CAN-AUX 1x Case-PPC-04-plus/PAD-light
- 1x Hydraulic Tester PPC-PAD-light-CAN
- or PPC-PAD-light-CAN-AUX
- 1x Power Supply incl. country-specific Adaptor
- Up to 3 CAN Pressure Sensor-PPC-CAN-P with installed Adaptors for STAUFF Test 20 (M16 x 2)
- CAN Temperature Sensor-PPC-CAN-T-M02 with installed SGV-16S-G-W3 (optional)
- Up to 4 CAN Connecting Cables
- Up to 2 CAN Y-Splitter Cables
- 1x CAN Terminating Resistor
- 3x Adaptors SAD for the STAUFF Test 15/12/10 series (standard for all PPC complete systems)
- 1x USB cable 1m (USB A to Micro-USB)
- Ix Quick guide with link to: PC software and instructions

Pressure Range and CAN Pressure Sensor

Pressure Range	CAN Pressure Sensor			
000	When ordering a complete system with one or two CAN pressure sensors, specify "000" for the pressure range of the 2. and / or 3. CAN pressure sensors.			
016				
060				
160	Pressure Range	Pressure Range	Pressure Range	
400	1. CAN Pressure Sensor	2. CAN Pressure Sensor	3. CAN Pressure Sensor	
600				
601				
z.B.	016 (16 bar)	060 (60 bar)	000 (0 bar)	
Please keep in mind measurements.	that two CAN pressure sensors with id	entical measuring ranges are necessa	ry for differential pressure	

PPC

т

Alternative

If you need more space in the case for your components, STAUFF offers the Case-PPC-PAD-plus as an alternative. This can hold several measuring devices at the same time and offers a variety of storage options (at least 9 pressure sensors and 2 flow turbines and much more). The case is only available individually. The contents must be ordered separately.



R STALIEF

PPC Starter System • Type PPC-PAD-plus



Content of the case may vary

Product Description

An initial starter kit with hydraulic tester, different input modules, cables and accessories is also available in a case. This contains everything required for the preferred sensor connection variant. This means that cables for connecting 4 CAN bus sensors or 3/6 analogue sensors as well as the required input modules are included. Sensors and test couplings are not included and have to be ordered separately.

The case is robust, lightweight and contains two special foam inserts that protect the device and any accessories in a well structured storage solution.

The sets are available with a device with or without WIFI capability and can also be purchased as a calibrated version with certificate.

Individual Components

Delivery standard for complete system SET-PPC-PAD-plus PPC-PAD-plus

- 24 V DC/2.5 A power supply unit incl. country-specific adaptor
- USB 2.0 cable (2 m/6.56 ft)
- Quickguide with Link for PC-Software and Manual
- Case-PPC-PAD-plus

And the following equipment, depending on the set:

SET-PPC-PAD-plus-ANALOG-3

- 1 analogue input module
- 3 analogue cables, 3 m

SET-PPC-PAD-plus-ANALOG-6

- 2 analogue input modules
- 6 analogue cables, 3 m


SET-PPC-PAD-plus-CAN-4

- 2 CAN cables, 0.5 m
- 2 CAN cables, 2 m
- 2 Y-splitters
- 2 terminating resistors



Trolley is optionally available (Trolley-Frame-Case-PPC-PAD-plus)

Order Codes



CAN-4

1)8	Series and Type	
Н	lydraulic Tester	SET-PPC-PAD-plus
2 V	VIFI	
١	Without WIFI	(none)
١	Nith WIFI	W
3 V	lersion	
fo	or 3 analogue STAUFF Sensors	ANALOG-3
fo	or 6 analogue STAUFF Sensors	ANALOG-6

for 4 STAUFF CAN Sensors

(4) Calibration

Without calibration certificate (none) With calibration certificate (factory calibration) CAL





Ordering table for measuring and test instruments

This list shows the individual components for the PPC-04-plus, PPC-06-plus, PPC-08-plus and PPC-PAD-plus Hydraulic Testers with their exact Order Codess.

* Pressure spikes up to 1000 bar/14500 psi

Description	Order Codes
1. Hydraulic Tester PPC-04-plus	
Hydraulic Tester PPC-04-plus with 2 sensor inputs, including accessories	PPC-04-plus
Hydraulic Tester PPC-04-plus with 2 sensor inputs, including accessories, calibrated	PPC-04-plus-CAL
CAN Hydraulic Tester PPC-04-plus-CAN with one CAN bus interface, including accessories	PPC-04-plus-CAN
Power Supply Unit (110/230 V AC) for PPC-04-plus with USB connection, including country-specific adaptor	Power-supply-PPC-04-plus-110/230V-USB
Case-PPC-04-plus/PAD-light (with foam insert)	Case-PPC-04-plus/PAD-light
2. Hydraulic Tester PPC-PAD-light	· · ·
Hydraulic Tester PPC-PAD-light for up to 4 sensor inputs, including accessories	PPC-PAD-light
Hydraulic Tester PPC-PAD-light for up to 4 sensor inputs, including accessories	PPC-PAD-light-CAL
Hydraulic Tester PPC-PAD-light-CAN for up to 6 CAN interfaces, including accessories	PPC-PAD-light-CAN
Hydraulic Tester PPC-PAD-light-CAN-AUX for up to 6 CAN interfaces, Third-party Sensors, including accessories	PPC-PAD-light-CAN-AUX
Quick Charger	Power-Supply-PPC-PAD-light
Case-PPC-04-plus/PAD-light (with foam insert)	Case-PPC-04-plus/PAD-light
3. Hydraulic Tester PPC-PAD-plus	Gase-rro-04-plus/rAD-light
Hydraulic Tester PPC-PAD-plus for up to 48 STAUFF CAN interfaces, including accessories	PPC-PAD-plus
Hydraulic Tester PPC-PAD-plus for up to 48 STAUFF CAN interfaces, including accessories, calibrated	PPC-PAD-plus-CAL
Hydraulic Tester PPC-PAD-plus for up to 48 STAUFF CAN interfaces, including accessories, WIFI capability	PPC-PAD-plus-W
Hydraulic Tester PPC-PAD-plus für bis zu 48 STAUFF CAN interfaces, including accessories, WIFI capability, calibrated	PPC-PAD-plus-W-CAL
Analogue Input Module	INPUT-MODUL-ANALOG-PPC-PAD-plus
Analogue Input Module, calibrated	INPUT-MODUL-ANALOG-PPC-PAD-plus-CAL
Analogue Input Module, galvanically isolated sensor inputs	INPUT-MODUL-ANALOG-PPC-PAD-plus-GALV
Analogue Input Module, galvanically isolated sensor inputs, calibrated	INPUT-MODUL-ANALOG-PPC-PAD-plus-GALV-CAL
CAN Input Module	INPUT-MODUL-CAN-PPC-PAD-plus
Connector for third-party sensor inputs M12 5-pin	PLUG-PPC-PAD-plus-AUX-M12A/5
Carrying Strap	Carry-strap-PPC-PAD-plus
Power Supply Unit (110/230 V AC) for PPC-PAD-plus, including country-specific adaptor	Power-Supply-PPC-PAD-plus-MULTI
Case-PPC-PAD-plus (with foam insert)	Case-PPC-PAD-plus
Trolley	Trolley-Frame-Case-PPC-PAD-plus
4. Current/Voltage/Frequency Converter/Third-Party Sensors	
Current/Voltage/Frequency Converter/Third-Party Sensors (up to 4 A DC/48 V DC)	Sensorkonverter-PPC
5. Cables	
Analogue	
Connection Cable 3 m/9.84 ft (5-pin connection on both ends)	Cable-PPC-04/12-3
Extension Cable 5 m/16.40 ft (5-pin connection on both ends)	Cable-PPC-04/12-5-EXT
CAN	
CAN Connection Cable 0.5 m/1.64 ft	Cable-PPC-CAN0.5
CAN Connection Cable 2 m/6.65 ft	Cable-PPC-CAN2
CAN Connection Cable 5 m/16.40 ft	Cable-PPC-CAN5
CAN Connection Cable 10 m/32.81 ft	Cable-PPC-CAN10
	Cable-PPC-CAN-Y
CAN Y-Splitter Cable 0.3 m/0.98 ft	



Ordering Table for Sensor System

All available individual components for the PPC Hydraulic Testers are listed here with their exact Order Codess.

 * Pressure spikes up to 1000 bar/14500 psi

All pressure, temperature and flow rate sensors are available as calibrated versions. Please add "-CAL" to the Order Codes.

Interact Proceedings Samo-PPC-04/12-016 Amage and the start of the start presence Samo-PPC-04/12-016 Presence regione 1 100 and 215 presence presence Samo-PPC-04/12-010 Presence regione 1 000 band 205 presence Samo-PPC-04/12-010 Presence regione 1 000 band 205 presence Samo-PPC-04/12-001 Presence regione 1 000 band 205 presence Samo-PPC-04/12-001 Presence regione 1 100 band 205 presence Samo-PPC-04/12-010 Presence regione 1 Damo PPC 04/12-010 Samo-PPC-04/12-010 Presence regione 1 Damo PPC 04/12-010 Samo-PPC 04/12-010 Presen	Description	Order Codes
Present opt for 0. 1.0 barb. 3.0 J all addate present Sensor PPC-04/12-P-06 Present opt for 0. 1.00 barb. 3.0 pl addate present Sensor PPC-04/12-P-06 Present opt for 0. 0.00 barb. 3.0 pl addate present Sensor PPC-04/12-P-06 Present opt for 0. 0.00 barb. 3.00 pl addate present Sensor PPC-04/12-P-06 Present opt for 1. 1.00 barb. 3.00 pl addate present Sensor PPC-04/12-P-06 Present opt for 0. 0.00 barb. 3.00 pl addate present Sensor PPC-04/12-P-06 Present opt for 0. 0.00 barb. 3.00 pl addate present Sensor PPC-04/12-P-06 Present opt for 0. 0.00 barb. 3.00 pl addate present Sensor PPC-04/12-P-06 Present opt for 0. 0.00 barb. 3.00 pl addate present Sensor PPC-04/12-P-06 Present opt for 0. 0.00 barb. 3.00 pl addate present Sensor PPC-04/12-P-105 Present opt for 0. 0.00 barb. 3.00 pl addate present Sensor PPC-04/12-P-105 Present opt for 0. 1.10 barb. 4.12 pl addate present Sensor PPC-04/12-P-105 Present opt for 0. 0.00 barb. 3.00 pl addate present Sensor PPC-04/12-P-105 Present opt for 0. 0.00 barb. 3.00 pl addate present Sensor PPC-04/12-P-105	1. Pressure Sensors G1/4 (without adaptor)	
Present opt for 0. 1.0 barb. 3.0 J all addate present Sensor PPC-04/12-P-06 Present opt for 0. 1.00 barb. 3.0 pl addate present Sensor PPC-04/12-P-06 Present opt for 0. 0.00 barb. 3.0 pl addate present Sensor PPC-04/12-P-06 Present opt for 0. 0.00 barb. 3.00 pl addate present Sensor PPC-04/12-P-06 Present opt for 1. 1.00 barb. 3.00 pl addate present Sensor PPC-04/12-P-06 Present opt for 0. 0.00 barb. 3.00 pl addate present Sensor PPC-04/12-P-06 Present opt for 0. 0.00 barb. 3.00 pl addate present Sensor PPC-04/12-P-06 Present opt for 0. 0.00 barb. 3.00 pl addate present Sensor PPC-04/12-P-06 Present opt for 0. 0.00 barb. 3.00 pl addate present Sensor PPC-04/12-P-06 Present opt for 0. 0.00 barb. 3.00 pl addate present Sensor PPC-04/12-P-105 Present opt for 0. 0.00 barb. 3.00 pl addate present Sensor PPC-04/12-P-105 Present opt for 0. 1.10 barb. 4.12 pl addate present Sensor PPC-04/12-P-105 Present opt for 0. 0.00 barb. 3.00 pl addate present Sensor PPC-04/12-P-105 Present opt for 0. 0.00 barb. 3.00 pl addate present Sensor PPC-04/12-P-105	Analogue	
Prease org hm 0 - 6.0 kp/ -6.0 kp/		Sensor-PPC-04/12-P-015
Passar group for 0 1.02 bbc/2.275 pit aboute pessar Senser PPC-04/12-P-060 Passar group for 0 6.00 bbc/2.200 pit aboute pessar Senser PPC-04/12-P-060 Passar group for 0 6.00 bbc/2.200 pit aboute pessar Senser PPC-04/12-P-060 Passar group for 0 6.00 bbc/2.200 pit aboute pessar Senser PPC-04/12-P-060 Passar group for 0 6.00 bbc/2.200 pit aboute pessar Senser PPC-04/12-P-060 Passar group for 0 6.00 bbc/2.200 pit aboute pessar Senser PPC-04/12-P-061 Passar group for 0 6.00 bbc/2.200 pit aboute pessar Senser PPC-04/12-P-061 Passar group for 0 6.00 bbc/2.200 pit aboute pessar Senser PPC-04/12-PF-061 Passar group for 0 6.00 bbc/2.200 pit aboute pessar Senser PPC-04/12-PF-061 Passar group for 0 6.00 bbc/2.200 pit aboute pessar Senser PPC-04/12-PF-061 Passar group for 0 6.00 bbc/2.200 pit aboute pessar Senser PPC-04/12-PF-061 Passar group for 0 6.00 bbc/2.200 pit aboute pessar Senser PPC-04/12-PF-061 Passar group for 0 6.00 bbc/2.200 pit aboute pessar Senser PPC-04/12-PF-061 Passar group for 0 6.00 bbc/2.200 pit aboute pessar Senser PPC-04/12-PF-061 <tr< td=""><td></td><td></td></tr<>		
Resure reg fran 0 400 bit 0 6001 disk disk pressure Sensor PPC-64/12-P-640 Resure reg fran 0 600 bit 0 8000 reg fran 1 Sensor PPC-64/12-P-601 Resure reg fran 0 600 bit 0 8000 reg fran 1 Sensor PPC-64/12-P-601 Resure reg fran 1 100 bit 1 500 bit 1 Sensor PPC-64/12-P-601 Resure reg fran 1 100 bit 1 500 bit 1 Sensor PPC-64/12-P-601 Resure reg fran 0 0000 bit 1 Sensor PPC-64/12-P-601 Resure reg fran 0 0000 bit 1 Sensor PPC-64/12-PF-64 Resure reg fran 0 0000 bit 1 Sensor PPC-64/12-PF-61 Resure reg fran 0 00000 bit 1 Sensor PPC-64/12-PF-61 Resure reg fran 0 00000 bit 1 Sensor PPC-64/12-PF-61 Resure reg fran 0 00000 bit 1 Sensor PPC-64/12-PF-61 Resure reg fran 0 00000 bit 1 Sensor PPC-64/12-PF-61 Resure reg fran 0 00000 bit 1 Sensor PPC-64/12-PF-66 Resure reg fran 0 00000 bit 1 Sensor PPC-64/12-PF-66 Resure reg fran 0 00000 bit 1 Sensor PPC-64/12-PF-66 Resure reg fran 0	• • •	
Pease range from 0 000 km 0 4070 get abouts pressure Sensor PPC-04/12-P-000 Pease range from 0 100 km 0.450 2010 get abouts pressure Sensor PPC-0AN-P-060 Pease range from 0 100 km 0.450 2010 get abouts pressure Sensor PPC-0AN-P-060 Pease range from 0 100 km 0.450 2010 get abouts pressure Sensor PPC-0AN-P-060 Pease range from 0 100 km 0.250 2010 get abouts pressure Sensor PPC-0AN-P-060 Pease range from 0 100 km 0.250 2010 get abouts pressure Sensor PPC-0AN-P-060 Pease range from 0 100 km 0.250 2017 get abouts pressure Sensor PPC-0AN-P-060 Pease range from 0 00 km 0.250 2017 get abouts pressure Sensor PPC-0A12-PT-060 Peaser range from 0 00 km 0.250 2017 get abouts pressure Sensor PPC-0A12-PT-060 Peaser range from 0 00 km 0.250 2017 get abouts pressure Sensor PPC-0A12-PT-060 Peaser range from 0 00 km 0.250 2017 get abouts pressure Sensor PPC-0A12-PT-060 Peaser range from 0 00 km 0.250 2010 get abouts pressure Sensor PPC-0A12-PT-060 Peaser range from 0 00 km 0.250 2010 get abouts pressure Sensor PPC-0A12-PT-060 Peaser range from 0 00 km 0.250 2011 get abouts pressure Sensor PPC-0A12-PT-060 Peaser range from 0 00 km 0.250 2011 get abouts pressure Sensor PPC-0A	• • •	
Pacesare Day Fam 1 Cold All and All	• • •	
CAN Sensor PPC-CANL-P-016 Peases regin for 1 _ 0 for 2 _ 12 pri relative presum Sensor PPC-CANL-P-036 Peases regin for 2 _ 0 for 2 _ 0 relative presum Sensor PPC-CANL-P-036 Peases regin for 3 _ 0 colum 2 _ 722 pri relative presum Sensor PPC-CANL-P-036 Peases regin for 3 _ 0 colum 2 _ 722 pri relative presum Sensor PPC-CANL-P-031 Pease regin for 3 _ 0 colum 2 _ 722 pri relative presum Sensor PPC-CANL-P-031 Pease regin for 3 _ 1 _ 1 for 74.1 5 _ 277 pri relative presum Sensor PPC-CANL-P-031 Pease regin for 3 _ 1 _ 1 for 74.1 5 _ 277 pri relative presum Sensor PPC-CANL-PF-031 Pease regin for 3 _ 1 _ 10 for 74.1 5 _ 277 pri relative presum Sensor PPC-CANL-PF-160 Pease regin for 4 _ 0 = 000 mol - 2772 pri relative presum Sensor PPC-CANL-PF-160 Pease regin for 4 _ 0 = 000 mol - 2772 pri relative presum Sensor PPC-CANL-PF-160 Pease regin for 4 _ 0 = 000 mol - 2772 pri relative presum Sensor PPC-CANL-PF-160 Pease regin for 5 _ 0 = 000 mol - 2772 pri relative presum Sensor PPC-CANL-PF-160 Pease regin for 6 _ 0 = 000 mol - 2772 pri relative presum Sensor PPC-CANL-PF-160 Pease regin for 0 = 000 mol - 2772 pri relative presum Sensor PPC-CANL-PF-160 Pease regin for 0 = 000 mol - 2772 pri relative presum S	•	
Passare range from 0 60 km/l 370 pai admakta pressure Samce PPC-CAM-P-606 Peasare range from 0 400 km/l 550 pai admakta pressure Sencor PPC-CAM-P-600 Peasare range from 0 600 km/l 570 pai admakta pressure Sencor PPC-CAM-P-601 Peasare range from 0 600 km/l 570 pai admakta pressure Sencor PPC-CAM-P-601 Peasare range from 0 600 km/l 670 pai admakta pressure Sencor PPC-CAM-P-601 Peasare range from 0 600 km/l 671 pai admakta pressure Sencor PPC-04/12-PT-615 Peasare range from 0 600 km/l 671 pai admakta pressure Sencor PPC-04/12-PT-600 Peasare range from 0 600 km/l 671 pai admakta pressure Sencor PPC-04/12-PT-600 Peasare range from 0 600 km/l 671 pai admakta pressure Sencor PPC-04/12-PT-600 Peasare range from 0 100 km/l 672 pai admakta pressure Sencor PPC-04/12-PT-600 Peasare range from 0 100 km/l 672 pai admakta pressure Sencor PPC-04/12-PT-600 Peasare range from 0 000 km/l 672 pai admakta pressure Sencor PPC-04/12-PT-600 Peasare range from 0 000 km/l 672 pai admakta pressure Sencor PPC-04/12-PT-600 Peasare range from 0 000 km/l 672 pai admakta pressure Sencor PPC-04/12-PT-600 Peasare range from 0 000 km/l 672 pai admakta pressure <td< td=""><td></td><td></td></td<>		
Pesser ing: fun 0	• • •	
Pesser regin form 0 400 barr 0 4702 bit abadra pressare Sensor-PPC-CAM-P-601 Pesser regin form 0 900 barr 0 4702 bit abadra pressare Sensor-PPC-CAM-P-601 Pesser regin form 0 900 barr 0 4702 bit abadra pressare Sensor-PPC-CAM-P-601 Pesser regin form 0 15 barr 0 470 bit abadra pressare Sensor-PPC-CAM-P-601 Pesser regin form 0 15 barr 0 470 bit abadra pressare Sensor-PPC-CAM-P-601 Pesser regin form 0 15 barr 0 470 bit abadra pressare Sensor-PPC-CAM-P-1015 Pesser regin form 0 00 barr 0 470 bit abadra pressare Sensor-PPC-CAM-P-1016 Pesser regin form 0 00 barr 0 470 bit abadra pressare Sensor-PPC-CAM-P-1016 Pesser regin form 0 00 barr 0 470 bit abadra pressare Sensor-PPC-CAM-PT-106 Pesser regin form 0 00 barr 0 470 bit abadra pressare Sensor-PPC-CAM-PT-016 Pesser regin form 0 00 barr 0 470 bit abadra pressare Sensor-PPC-CAM-PT-016 Pesser regin form 0 00 barr 0 470 bit abadra pressare Sensor-PPC-CAM-PT-016 Pesser regin form 0 00 barr 0 470 bit abadra pressare Sensor-PPC-CAM-PT-016 Pesser regin form 0 00 barr 0 470 bit abadra pressare Sensor-PPC-CAM-PT-016 Pesser regin form 0 00 barr 0 470 bit abadra pressare Sensor-PPC-CAM-PT-010 <	Pressure range from 0 60 bar/0 870 psi absolute pressure	Sensor-PPC-CAN-P-060
Pesser ang: from 0 400 par 0 4702 pit abadam pressare Sensor-PPC-CAN-P-601 Pesser ang: from 0 600 par 0 4702 pit abadam pressare Sensor-PPC-CAN-P-601 Pesser ang: from 1 15 top'.14.5 217 pit relater pressare Sensor-PPC-CAN-P-601 Pesser ang: from 0 600 par 0 4702 pit abadam pressare Sensor-PPC-CAN-2.PT-600 Pesser ang: from 0 600 par 0 4702 pit abadam pressare Sensor-PPC-CAN-2.PT-600 Pesser ang: from 0 600 par 0 4702 pit abadam pressare Sensor-PPC-CAN-2.PT-600 Pesser ang: from 0 600 par 0 4702 pit abadam pressare Sensor-PPC-CAN-2.PT-600 Pesser ang: from 0 600 par 0 4702 pit abadam pressare Sensor-PPC-CAN-2.PT-601 Pesser ang: from 0 600 par 0 4702 pit abadam pressare Sensor-PPC-CAN-PT-016 Pesser ang: from 0 600 par 0 4702 pit abadam pressare Sensor-PPC-CAN-PT-016 Pesser ang: from 0 600 par 0 6702 pit abadam pressare Sensor-PPC-CAN-PT-016 Pesser ang: from 0 600 par 0 6702 pit abadam pressare Sensor-PPC-CAN-PT-016 Pesser ang: from 0 600 par 0 6702 pit abadam pressare Sensor-PPC-CAN-PT-016 Pesser ang: from 0 600 par 0 6702 pit abadam pressare Sensor-PPC-CAN-PT-000 Pesser ang: from 0 600 par 0 6702 pit abadam pressare Sensor-PPC-CAN-PT-000	Pressure range from 0 160 bar/0 2321 psi absolute pressure	Sensor-PPC-CAN-P-160
Pesser ang: from 0 400 par 0 4702 pit abadam pressare Sensor-PPC-CAN-P-601 Pesser ang: from 0 600 par 0 4702 pit abadam pressare Sensor-PPC-CAN-P-601 Pesser ang: from 1 15 top'.14.5 217 pit relater pressare Sensor-PPC-CAN-P-601 Pesser ang: from 0 600 par 0 4702 pit abadam pressare Sensor-PPC-CAN-2.PT-600 Pesser ang: from 0 600 par 0 4702 pit abadam pressare Sensor-PPC-CAN-2.PT-600 Pesser ang: from 0 600 par 0 4702 pit abadam pressare Sensor-PPC-CAN-2.PT-600 Pesser ang: from 0 600 par 0 4702 pit abadam pressare Sensor-PPC-CAN-2.PT-600 Pesser ang: from 0 600 par 0 4702 pit abadam pressare Sensor-PPC-CAN-2.PT-601 Pesser ang: from 0 600 par 0 4702 pit abadam pressare Sensor-PPC-CAN-PT-016 Pesser ang: from 0 600 par 0 4702 pit abadam pressare Sensor-PPC-CAN-PT-016 Pesser ang: from 0 600 par 0 6702 pit abadam pressare Sensor-PPC-CAN-PT-016 Pesser ang: from 0 600 par 0 6702 pit abadam pressare Sensor-PPC-CAN-PT-016 Pesser ang: from 0 600 par 0 6702 pit abadam pressare Sensor-PPC-CAN-PT-016 Pesser ang: from 0 600 par 0 6702 pit abadam pressare Sensor-PPC-CAN-PT-000 Pesser ang: from 0 600 par 0 6702 pit abadam pressare Sensor-PPC-CAN-PT-000	Pressure range from 0 400 bar/0 5801 psi absolute pressure	Sensor-PPC-CAN-P-400
Pinsace ranging from 000 bar/l071 pp i aboling pressure* Sensor-PPC-CAM-P-601 2. Pressure ranging from 1		Sensor-PPC-CAN-P-600
2. Pressur Program Sensor-PPC-04/12-PT-015 Pressur may from 1 15 bar/1-4.5 217 ppi habbule pressure Sensor-PPC-04/12-PT-015 Pressure may from 1 0. 50 bar/1 277 ppi abbule pressure Sensor-PPC-04/12-PT-000 Pressure may from 0 0. 50 bar/1 277 ppi abbule pressure Sensor-PPC-04/12-PT-600 Pressure may from 0 00 bar/1 267 ppi abbule pressure Sensor-PPC-04/12-PT-600 Pressure may from 0 00 bar/1 267 ppi abbule pressure Sensor-PPC-04/12-PT-600 Pressure may from 1 15 bar/1.4.5 223 ppi abbule pressure Sensor-PPC-04/12-PT-600 Pressure may from 0 00 bar/1 267 ppi abbule pressure Sensor-PPC-CAM-PT-106 Pressure may from 0 00 bar/1 267 ppi abbule pressure Sensor-PPC-CAM-PT-600 Pressure may from 0 00 bar/1 267 ppi abbule pressure Sensor-PPC-CAM-PT-600 Pressure may from 0 00 bar/1 267 ppi abbule pressure Sensor-PPC-CAM-PT-600 Pressure may from 0 00 bar/1 267 ppi abbule pressure Sensor-PPC-CAM-PT-600 Pressure may from 0 00 bar/1 267 ppi abbule pressure Sensor-PPC-CAM-PT-600 Pressure may from 0 00 bar/1 267 ppi abbule pressure Sensor-PPC-CAM-PT-601 Satappi C141 bit 163 2 (SIMPT Fiet 20) SDA-20-C14-W13 Adappi C141 bit 163 2 (SIMPT Fiet 20) <		
Analogue Sensor-PPC-04/12-PT-015 Pressure range from 1 15 bat/1.4.5 217 pai robube pressure Sensor-PPC-04/12-PT-000 Pressure range from 0 150 bat/0275 pai aboute pressure Sensor-PPC-04/12-PT-000 Pressure range from 0 100 bat/02072 pai aboute pressure Sensor-PPC-04/12-PT-000 Pressure range from 0 00 bat/02072 pai aboute pressure Sensor-PPC-04/12-PT-000 Pressure range from 0 00 bat/02072 pai aboute pressure Sensor-PPC-04/12-PT-001 Pressure range from 0 00 bat/02072 pai aboute pressure Sensor-PPC-04/12-PT-001 Pressure range from 00 bit bat/02072 pai aboute pressure Sensor-PPC-CAN-PT-001 Pressure range from 00 bit bat/02072 pai aboute pressure Sensor-PPC-CAN-PT-001 Pressure range from 00 bit bat/02072 pai aboute pressure Sensor-PPC-CAN-PT-601 Pressure range from 00 bit bat/02072 pai aboute pressure Sensor-PPC-CAN-PT-601 Pressure range from 00 bit bat/02072 pai aboute pressure Sensor-PPC-CAN-PT-601 Pressure range from 00 bit bat/02072 pai aboute pressure Sensor-PPC-CAN-PT-601 Pressure range from 00 bit bat/02072 pai aboute pressure Sensor-PPC-CAN-PT-601 Pressure range from 00 bit bat/02072 pai aboute pressure Sensor0-PPC-CAN-PT-601 <td< td=""><td></td><td></td></td<>		
Pressure range from 060 bits/0570 pit absolute pressure Sensor-PPC-04/12-PT-060 Pessure range from 060 bits/0570 pit absolute pressure Sensor-PPC-04/12-PT-600 Pessure range from 060 bits/0570 pit absolute pressure Sensor-PPC-04/12-PT-600 Pessure range from 060 bits/0570 pit absolute pressure Sensor-PPC-04/12-PT-600 Pessure range from 060 bits/0570 pit absolute pressure Sensor-PPC-04/12-PT-600 Pessure range from 060 bits/0570 pit absolute pressure Sensor-PPC-04/12-PT-600 Pessure range from 060 bits/0570 pit absolute pressure Sensor-PPC-04/12-PT-600 Pessure range from 060 bits/0570 pit absolute pressure Sensor-PPC-04/12-PT-600 Pessure range from 060 bits/0570 pit absolute pressure Sensor-PPC-04/12-PT-600 Pessure range from 060 bits/0570 pit absolute pressure Sensor-PPC-04/12-T600 Pessure range from 060 bits/0570 pit absolute pressure Sensor-PPC-04/12-T600 Pessure range from 060 bits/0570 pit absolute pressure Sensor-PPC-04/12-T600 Pessure range from 060 bits/0570 pit absolute pressure Sensor-PPC-04/12-T600 Pessure range from 060 bits/0570 pit absolute pressure Sensor-PPC-04/12-T600 Pessure range from 060 bits/0570 pit absolute pressure Sensor		
Pressure range from 060 bits/0570 pit absolute pressure Sensor-PPC-04/12-PT-060 Pessure range from 060 bits/0570 pit absolute pressure Sensor-PPC-04/12-PT-600 Pessure range from 060 bits/0570 pit absolute pressure Sensor-PPC-04/12-PT-600 Pessure range from 060 bits/0570 pit absolute pressure Sensor-PPC-04/12-PT-600 Pessure range from 060 bits/0570 pit absolute pressure Sensor-PPC-04/12-PT-600 Pessure range from 060 bits/0570 pit absolute pressure Sensor-PPC-04/12-PT-600 Pessure range from 060 bits/0570 pit absolute pressure Sensor-PPC-04/12-PT-600 Pessure range from 060 bits/0570 pit absolute pressure Sensor-PPC-04/12-PT-600 Pessure range from 060 bits/0570 pit absolute pressure Sensor-PPC-04/12-PT-600 Pessure range from 060 bits/0570 pit absolute pressure Sensor-PPC-04/12-T600 Pessure range from 060 bits/0570 pit absolute pressure Sensor-PPC-04/12-T600 Pessure range from 060 bits/0570 pit absolute pressure Sensor-PPC-04/12-T600 Pessure range from 060 bits/0570 pit absolute pressure Sensor-PPC-04/12-T600 Pessure range from 060 bits/0570 pit absolute pressure Sensor-PPC-04/12-T600 Pessure range from 060 bits/0570 pit absolute pressure Sensor	0	Sensor-PPC-04/12-PT-015
Pesser ange from 0 105 Jan 2017, pp. 125 pp. 13 double pressure Sensor-PPC-04/12-PT-100 Pesser ange from 0 600 ban 0 8702 pp. 13 double pressure Sensor-PPC-04/12-PT-600 Pesser ange from 0 600 ban 0 8702 pp. 13 double pressure Sensor-PPC-04/12-PT-600 Pesser ange from 0 600 ban 0 8702 pp. 13 double pressure Sensor-PPC-04/12-PT-600 Pesser ange from 0 60 ban 0 8702 pp. 13 double pressure Sensor-PPC-0AN+FT-600 Pesser ange from 0 60 ban 0 8702 pp. 13 double pressure Sensor-PPC-0AN+FT-600 Pesser ange from 0 60 ban 0 8702 pp. 13 double pressure Sensor-PPC-0AN+FT-600 Pesser ange from 0 60 ban 0 8702 pp. 13 double pressure Sensor-PPC-0AN+FT-600 Pesser ange from 0 60 ban 0 8702 pp. 13 double pressure Sensor-PPC-0AN+FT-601 Pesser ange from 0 60 ban 0 8702 pp. 13 double pressure Sensor-PPC-0AN+FT-601 Adaptor 101 to 101 fs 2 (STAFF Field 20) SDA-20-617-W3 Adaptor 114 to 101 fs 2 (STAFF Field 20) SDA-20-617-W3 Adaptor 101 to 101 fs 2 (STAFF Field 20) SDA-20-617-W3 Adaptor 101 fs 2 (STAFF Field 20) SDA-20-617-W3 Adaptor 101 fs 2 (STAFF Field 20) SDA-20-716-W3 Adaptor 101 fs 2 (STAFF Field 20) SDA-20-717-EW3 Adaptor 1		
Pesser ange from 0 400 n/m 0.501 pd i aboutus pressure Sensor PPC-04/12-PT-600 Pesser ange from 0 600 bar/0 6702 psi aboutus pressure Sensor PPC-04/12-PT-600 Pesser ange from 0 600 bar/0 6702 psi aboutus pressure Sensor-PPC-04/12-PT-600 Pesser ange from 0 600 bar/0 6702 psi aboutus pressure Sensor-PPC-04/12-PT-600 Pesser ange from 0 600 bar/0 6702 psi aboutus pressure Sensor-PPC-04/12-PT-600 Pesser ange from 0 600 bar/0 6702 psi aboutus pressure Sensor-PPC-04/12-PT-600 Pesser ange from 0 600 bar/0 6702 psi aboutus pressure Sensor-PPC-04/12-PT-600 Pesser ange from 0 600 bar/0 6702 psi aboutus pressure Sensor-PPC-04/12-PT-600 Pesser ange from 0 600 bar/0 6702 psi aboutus pressure Sensor-PPC-04/12-PT-600 Pesser ange from 0 600 bar/0 6702 psi aboutus pressure Sensor-PPC-04/12-PT-600 Pesser ange from 0 600 bar/0		
Pressure range from 0 600 bar/0 6772 pp at about be pressure 's Sensor - PPC-04/12-PT-601 CAN Pressure range from 0 600 bar/0 672 pp at about be pressure 's Sensor - PPC-CAN-PT-160 Pressure range from 0 600 bar/0 672 pp at about the pressure 's Sensor - PPC-CAN-PT-160 Pressure range from 0 600 bar/0 672 pp at about the pressure 's Sensor - PPC-CAN-PT-160 Pressure range from 0 600 bar/0 672 pp at about the pressure 's Sensor - PPC-CAN-PT-160 Pressure range from 0 600 bar/0 672 pp at about the pressure 's Sensor - PPC-CAN-PT-160 Pressure range from 0 600 bar/0 672 pp at about the pressure 's Sensor - PPC-CAN-PT-160 Pressure range from 0 600 bar/0 672 pp at about the pressure 's Sensor - PPC-CAN-PT-160 Adapter 174 bar M5 x 2 (SALPT First 20) SDA-20-172-W3 Adapter 174 bar M5 x 2 (SALPT First 20) SDA-20-672-W3 Adapter 174 bar M5 x 2 (SALPT First 20) SAD-20172-W3 Adapter 174 bar M5 x 2 (SALPT First 20) SAD-20172-W3 Adapter 116 x 2 (SALPT First 20) SAD-20172-W3 Adapter 116 x 2 (SALPT First 20) SAD-20172-M3 Adapter 116 x 2 (SALPT First 20) SAD-20172-M3 Adapter 116 x 2 (SALPT First 20) SAD-20172-M3		
Pressure angle from 0 600 bar/0 8702 pp absolute pressure Sansor-PPC-04/12-PT-601 ON Pressure angle from 1 16 bar/1.4.5 22.20 pi absolute pressure Sansor-PPC-CAN-PT-160 Pressure angle from 0 600 bar/0 601 pp absolute pressure Sansor-PPC-CAN-PT-160 Pressure angle from 0 600 bar/0 601 pp absolute pressure Sansor-PPC-CAN-PT-600 Pressure angle from 0 600 bar/0 6702 pp absolute pressure Sansor-PPC-CAN-PT-600 Pressure angle from 0 600 bar/0 6702 pp absolute pressure Sansor-PPC-CAN-PT-600 Pressure angle from 0 600 bar/0 6702 pp absolute pressure Sansor-PPC-CAN-PT-600 Pressure angle from 0 600 bar/0 6702 pp absolute pressure Sansor-PPC-CAN-PT-600 Pressure angle from 0 600 bar/0 6702 pp absolute pressure Sansor-PPC-CAN-PT-600 Anapter C141 but Mits 22 (SINFEF Test 20) SDA-20-6174-W3 Adapter Mits X2 but Sin LS (LSTLEF Test 20 SINFEF Test 12) SAD-20178-W3 Adapter Mits X2 but Sin LS (LSTLEF Test 20 SINFEF Test 12) SAD-20178-W3 Adapter Mits X2 but Sin LSTLEF Test 20 SINFEF Test 12) SAD-20178-W3 Adapter Mits X2 but Sin LSTLEF Test 20 SINFEF Test 12) SAD-20178-W3 Adapter Mits X2 but Sin LSTLEF Test 20 SINFEF Test 12) SAD-20178-W3 Sorew-In	• • •	
CAN Sensor rape Sensor PPC-CAN-PT-016 Pressure range from 0 60 bar/0 221 psi absolute pressure Sensor-PPC-CAN-PT-060 Pressure range from 0 60 bar/0 221 psi absolute pressure Sensor-PPC-CAN-PT-000 Pressure range from 0 60 bar/0 670 psi absolute pressure Sensor-PPC-CAN-PT-600 Pressure range from 0 60 bar/0 670 psi absolute pressure Sensor-PPC-CAN-PT-601 3. Precess Connection Adaptors for PPC Pressure Sensors Son-20-672-W3 Adaptor 1714 to M16 × 2 (SINLFF Test 20) SDA-20-6174-W3 Adaptor 1716 to M16 × 2 (SINLFF Test 20) SDA-20-6174-W3 Adaptor 1716 to M16 × 2 (SINLFF Test 20) SDA-20-6174-W3 Adaptor 1716 to M16 × 2 (SINLFF Test 20) SDA-20-6174-W3 Adaptor 1716 to M16 × 2 (SINLFF Test 20) SDA-20-6172-W3 Adaptor M16 × 2 to M16 × 1.5 (SINLFF Test 20) SDA-20-6172-W3 Adaptor M16 × 2 to M16 × 1.5 (SINLFF Test 20) SDA-20-6172-W3 Adaptor M16 × 2 to M16 × 1.5 (SINLFF Test 20) SDA-20-6172-W3 Adaptor M16 × 2 to M16 × 1.5 (SINLFF Test 20) SDA-20-6172-W3 Adaptor M16 × 2 to M16 × 1.5 (SINLFF Test 20) SDA-20-6172-W3 Adaptor M16 × 2 to M16 × 1.5 (SINLFF Test 20) SDA-20-6172-W3 Ada		
Pressure anage from 1 16 Joor 1.4.5	• • •	Sensor-PPC-04/12-PT-601
Pressure range from 0 60 bar/0 2821 pol absolute pressure Sensor-PPC-CAN-PT-600 Pressure range from 0 400 bar/0 2821 pol absolute pressure Sensor-PPC-CAN-PT-601 Pressure range from 0 400 bar/0 67/22 pol absolute pressure Sensor-PPC-CAN-PT-601 Pressure range from 0 400 bar/0 67/22 pol absolute pressure Sensor-PPC-CAN-PT-601 3. Process Connection Adaptors for PPC Pressure Sensors SDA-20-61/4-W3 Adaptor 61/2 burl M5 x 2 (STAPF First 20) SDA-20-61/2-W3 Adaptor 61/2 burl M5 x 2 (STAPF First 20) SDA-20-61/2-W3 Adaptor M16 X 2 burl M5 x 15 (STAPF First 20) SDA-20-61/2-W3 Adaptor M16 X 2 burl M5 x 15 (STAPF First 20) SDA-20-61/2-W3 Adaptor M16 X 2 burl M5 x 15 (STAPF First 20) SDA-20-61/2-W3 Adaptor M16 X 2 burl M5 x 15 (STAPF First 20) SDA-20-61/2-W3 Adaptor M16 X 2 burl M5 x 15 (STAPF First 20) SDA-20-61/2-W3 Adaptor M16 X 2 burl M5 x 15 (STAPF First 20) SDA-20-61/2-W3 Adaptor M16 X 2 burl M5 x 15 (STAPF First 20) SDA-20-61/2-W3 Adaptor M16 X 2 burl M5 x 15 (STAPF First 20) SDA-20-61/2-First 20 Sorew-In Temperature Sensor for line installation (M10 x 1) Sensor-PPC-041/2-Find2 Sorew-In Temperature Sensor for line installation (M10 x 1)		
Pressure range from 0 160 bar/0 2321 pi absolute pressure Sensor-PPC-CAN-PT-60 Pressure range from 0 600 bar/0 69702 pi absolute pressure Sensor-PPC-CAN-PT-600 Pressure range from 0 600 bar/0 69702 pi absolute pressure Sensor-PPC-CAN-PT-601 3. Process Connection Adaptors for PPC Pressure Sensors Sensor-PPC-CAN-PT-601 Adaptor 1/14 of Net 2 (SINJEF Fiest 20) SDA-20-61/2-W3 Adaptor M16 X 2 by M1F Fiest 20) SDA-20-61/2-W3 Adaptor M16 X 2 by M1F Fiest 20 to STAUFF Fiest 10 SDA-20-61/2-W3 Adaptor M16 X 2 by M1F Fiest 20 to STAUFF Fiest 10 SDA-20-01/2-W3 Adaptor M16 X 2 by M1F Fiest 20 to STAUFF Fiest 10 SDA-20-01/2-W3 Adaptor M16 X 2 by M1F Fiest 20 to STAUFF Fiest 10 SDA-20-01/2-W3 Adaptor M16 X 2 by M16 N to 15 (S1/AFF Fiest 20 to STAUFF Fiest 10) SDA-20-17-8-W3 Adaptor M16 X 2 by M16 N to 15 (S1/AFF Fiest 20 to STAUFF Fiest 10) SDA-20-17-8-W3 Adaptor M16 X 2 by M16 N to 15 (S1/AFF Fiest 20 to STAUFF Fiest 10) SDA-20-17-8-W3 Adaptor M16 X 2 by M16 N to 15 (S1/AFF Fiest 20 to STAUFF Fiest 10) SDA-20-17-8-W3 Strew Fiestor for line installation (M10 X 1) Sensor-PPC-04/12-TM02 Strew Fiestor for line installation (M10 X 1) Sensor-PPC-04/12-TM02 Str	Pressure range from -1 16 bar/-14.5 232 psi relative pressure	Sensor-PPC-CAN-PT-016
Pressure range from 0 400 bar/0 5401 psi absolute pressure Sensor-PPC-CAN-FT-400 Pressure range from 0 600 bar/0 5702 psi absolute pressure Sensor-PPC-CAN-FT-600 Sensor-PPC-CAN-FT-601 Sensor-PPC-CAN-FT-601 3. Process Connection Adaptors for PPC Pressure Sensors SDA-20-61/4-W3 Adaptor 61/2 to M16 x 2 (STAUFF Test 20) SDA-20-61/2-W3 Adaptor 161 X 2 to M16 x 1.5 (STAUFF Test 20) SDA-20-61/2-W3 Adaptor 161 X 2 to M16 x 1.5 (STAUFF Test 20) SDA-20-61/2-W3 Adaptor 161 X 2 to M16 x 1.5 (STAUFF Test 20) SDA-20-61/2-W3 Adaptor 161 X 2 to M16 x 1.5 (STAUFF Test 20) SDA-20-61/2-W3 Adaptor 161 X 2 to M16 x 1.5 (STAUFF Test 20) SDA-20-61/2-W3 Adaptor 161 X 2 to M16 x 1.5 (STAUFF Test 20) SDA-20-61/2-W3 Adaptor 161 X 2 to M16 x 1.5 (STAUFF Test 20) SDA-20-61/2-W3 Adaptor 161 X 2 to M16 x 1.5 (STAUFF Test 20) SDA-20-61/2-T-M02 Screw-In Temperature Sensor for line installation (M10 x 1) Sensor-PPC-04/12-T-M02 Screw-In Temperature Sensor for line installation (M10 x 1) Sensor-PPC-04/12-TSH Screw-In Temperature Sensor for line installation (M10 x 1) Sensor-PPC-04/12-TSH Screw-In Temperature Sensor for line installation (M10 x 1) Sensor-PPC-04/12-TSH Screw-In Temperature Sensor for line installation (M10 x 1) Sensor-PPC-04/12-TSH Screw-In Temperature Sensor for line installatio	Pressure range from 0 60 bar/0 870 psi absolute pressure	Sensor-PPC-CAN-PT-060
Pressure range from 0 400 bar/0 5401 psi absolute pressure Sensor-PPC-CAN-FT-400 Pressure range from 0 600 bar/0 5702 psi absolute pressure Sensor-PPC-CAN-FT-600 Sensor-PPC-CAN-FT-601 Sensor-PPC-CAN-FT-601 3. Process Connection Adaptors for PPC Pressure Sensors SDA-20-61/4-W3 Adaptor 61/2 to M16 x 2 (STAUFF Test 20) SDA-20-61/2-W3 Adaptor 161 X 2 to M16 x 1.5 (STAUFF Test 20) SDA-20-61/2-W3 Adaptor 161 X 2 to M16 x 1.5 (STAUFF Test 20) SDA-20-61/2-W3 Adaptor 161 X 2 to M16 x 1.5 (STAUFF Test 20) SDA-20-61/2-W3 Adaptor 161 X 2 to M16 x 1.5 (STAUFF Test 20) SDA-20-61/2-W3 Adaptor 161 X 2 to M16 x 1.5 (STAUFF Test 20) SDA-20-61/2-W3 Adaptor 161 X 2 to M16 x 1.5 (STAUFF Test 20) SDA-20-61/2-W3 Adaptor 161 X 2 to M16 x 1.5 (STAUFF Test 20) SDA-20-61/2-W3 Adaptor 161 X 2 to M16 x 1.5 (STAUFF Test 20) SDA-20-61/2-T-M02 Screw-In Temperature Sensor for line installation (M10 x 1) Sensor-PPC-04/12-T-M02 Screw-In Temperature Sensor for line installation (M10 x 1) Sensor-PPC-04/12-TSH Screw-In Temperature Sensor for line installation (M10 x 1) Sensor-PPC-04/12-TSH Screw-In Temperature Sensor for line installation (M10 x 1) Sensor-PPC-04/12-TSH Screw-In Temperature Sensor for line installation (M10 x 1) Sensor-PPC-04/12-TSH Screw-In Temperature Sensor for line installatio	Pressure range from 0 160 bar/0 2321 psi absolute pressure	Sensor-PPC-CAN-PT-160
Pressure range from 0 600 bar/0 8702 pai absolute pressure' Sensor-PPC-CAN-PT-600 Pressure range from 0 600 bar/0 8702 pai absolute pressure' Sensor-PPC-CAN-PT-601 Supcess Connection Adaptors for PPC Pressure Sensors SDA-20-6174-W3 Adaptor 61/4 to M16 ×2 (STAUFT Fest 20) SDA-20-6172-W3 Adaptor 61/2 to M16 ×2 (STAUFT Fest 20) SDA-20-6172-W3 Adaptor M16 ×2 to STAUFT Fest 20 STAUFT Fest 15) SAD-2017-B-W3 Adaptor M16 × 2 to P16 ×1.5 (STAUFT Fest 20 to STAUFT Fest 10) SAD-2017-B-W3 Adaptor M16 × 2 to P16 ×1.5 (STAUFT Fest 20 to STAUFT Fest 10) SAD-2017-B-W3 Adaptor M16 × 2 to P16 ×1.5 (STAUFT Fest 20 to STAUFT Fest 10) SAD-2017-B-W3 Adaptor M16 × 2 to P16 ×1.5 (STAUFT Fest 20 to STAUFT Fest 10) SAD-2017-B-W3 Adaptor M16 × 2 to P16 ×1.5 (STAUFT Fest 20 to STAUFT Fest 10) SAD-2017-B-W3 Adaptor M16 × 2 to P16 ×1.5 (STAUFT Fest 20 to STAUFT Fest 10) SAD-2017-T-M02 Screw-In Temperature Bensor for Installation (M10 × 1) Sensor-PPC-04/12-T-M02 Screw-In Temperature Sensor for Installation (M10 × 1) Sensor-PPC-04/12-T-M02 Screw-In Temperature Sensor for Installation (M10 × 1) Sensor-PPC-04/12-T-M02 Screw-In Temperature Sensor for Installation (M10 × 1) Sensor-PPC-04/12-SFM-015 <td>• • •</td> <td>Sensor-PPC-CAN-PT-400</td>	• • •	Sensor-PPC-CAN-PT-400
Pressure range from 0, 600 bar/0, 8702 psi absolute pressure* Sensor-PPC-CAN-PT-601 3. Process Connection Adaptors for PPC Pressure Sensors SDA-20-61/4-W3 Adaptor 61/2 of M16 x 2 (STAUFF Test 20) SDA-20-61/2-W3 Adaptor M16 x 2 to M16 x 1 S (STAUFF Test 20) SAD-20-15-B-W3 Adaptor M16 x 2 to M16 x 1 S (STAUFF Test 20) SAD-20-12-B-W3 Adaptor M16 x 2 to M16 x 1 S (STAUFF Test 20) SAD-20-12-B-W3 Adaptor M16 x 2 to M16 x 1 S (STAUFF Test 20) SAD-20-12-B-W3 Adaptor M16 x 2 to M16 x 1 S (STAUFF Test 20) SAD-20-12-B-W3 Adaptor M16 x 2 to M16 x 1 S (STAUFF Test 20) SAD-20-12-B-W3 Adaptor M16 x 2 to M16 x 1 S (STAUFF Test 20) SAD-20-12-B-W3 Adaptor M16 x 2 to M16 x 1 S (STAUFF Test 20) SAD-20-12-B-W3 Adaptor M16 x 2 to M16 x 1 S (STAUFF Test 20) SAD-20-12-B-W3 Adaptor M16 x 2 to M16 x 1 S (STAUFF Test 20) SAD-20-12-B-W3 Stare-In Temperature Sensor for line installation (M10 x 1) Sensor-PPC-04/12-T-M02 Stare-In Temperature Sensor for line installation (M10 x 1) Sensor-PPC-04/12-TSH Stare-In Temperature Sensor for line installation (M10 x 1) Sensor-PPC-04/12-TSH Stare-In Temperature Sensor for line installation (M10 x 1) Sensor-PPC-04/12-TSH	• • •	
A Process Connection Adaptors for PPC Pressure Sensors Adaptor G1/4 to M16 x 2 (STAUFF Test 20) SDA-20-G1/2-W3 Adaptor M16 X 2 (STAUFF Test 20) SDA-20-G1/2-W3 Adaptor M16 X 2 to M16 x 1, 6 (STAUFF Test 20) SAD-20/15-E-W3 Adaptor M16 X 2 to S12,65 x 1,5 (STAUFF Test 20) SAD-20/15-E-W3 Adaptor M16 X 2 to plug-in system (STAUFF Test 20) SAD-20/16-E-W3 Adaptor M16 X 2 to plug-in system (STAUFF Test 20) SAD-20/16-E-W3 Adaptor M16 X 2 to plug-in system (STAUFF Test 20) STAUFF Test 20) Strew-In Temperature sensor for line installation (M10 x 1) Sensor-PPC-04/12-T-M02 Screw-In Temperature Sensor for line installation (G1/4) Sensor-PPC-04/12-T-B02 Screw-In Temperature Sensor for line installation (G1/4) Sensor-PPC-04/12-TB02 Screw-In Temperature Sensor for line installation (G1/4) Sensor-PPC-04/12-SFM-015 Masuring range from 1 15 Umin / 0.33 9 US GPM Flow-meter-PPC-04/12-SFM-015 Measuring range from 1 15 Umin / 1 15.9 US GPM Flow-meter-PPC-04/12-SFM-060	• • •	
Adaptor G1/4 to M16 x 2 (STAUFF Test 20) SDA-20-G1/4-W3 Adaptor G1/2 to M16 x 1, 5 (STAUFF Test 20) SDA-20-G1/2-W3 Adaptor M16 X 2 to M16 x 1, 5 (STAUFF Test 20 STAUFF Test 12) SAD-20/12-B-W3 Adaptor M16 X 2 to plug-in system (STAUF Test 20 STAUFF Test 10) SAD-20/12-B-W3 Adaptor M16 X 2 to plug-in system (STAUF Test 20 STAUFF Test 10) SAD-20/10-B-W3 Ataptor M16 X 2 to plug-in system (STAUF Test 20 STAUFF Test 10) SAD-20/10-B-W3 Adaptor M16 X 2 to plug-in system (STAUF Test 20 to STAUFF Test 10) SAD-20/10-B-W3 Ataptor M16 X 2 to plug-in system (STAUF Test 20 to STAUFF Test 10) SAD-20/10-B-W3 Atomperature Sensor for line installation (M10 x 1) Sensor-PPC-04/12-T-M02 Screw-In Temperature Sensor for line installation (M10 x 1) Sensor-PPC-CAV/12-TSNI Screw-In Temperature Sensor for line installation (M10 x 1) Sensor-PPC-CAV-12-TM02 Screw-In Temperature Sensor for line installation (M10 x 1) Sensor-PPC-CAV-12-SSM Screw-In Temperature Sensor for line installation (M10 x 1) Sensor-PPC-CAV-12-SSM-015 Measuring range forn 1 15 //min / 0.3 3.9 US GPM Flow-meter-PPC-04/12-SFM-015 Measuring range forn 1 0.9 //min / 1 1.5.9 US GPM Flow-meter-PPC-04/12-SFM-015 Measuring range forn 0 0.00 //min / 1 1.5.9 US GPM Flow-meter-PPC-04/12-SFM-015 <td></td> <td>3011501-FFG-0AIN-F1-001</td>		3011501-FFG-0AIN-F1-001
Adaptor M16 X2 to M16 X.15 (STAUFF Test 20) SDA-20-61/2-W3 Adaptor M16 X.2 to M16 X.15 (STAUFF Test 20 to STAUFF Test 12) SAD-20/15-P-W3 Adaptor M16 X.2 to plug-in system (STAUFF Test 20 to STAUFF Test 10) SAD-20/12-P-W3 Adaptor M16 X.2 to plug-in system (STAUFF Test 20 to STAUFF Test 10) SAD-20/10-B-W3 A. Temperature measurement (temperature sensors -40°C +150 °C/-40 °F +302 °F) Feasible Control Conter Contrel Control Control Contrel Control Control Control Cont	3. Process Connection Adaptors for PPC Pressure Sensors	
Adaptor M16 X 2 to M16 x 1.5 (STAUFF Test 20 to STAUFF Test 15) SAD-20/15-B-W3 Adaptor M16 X 2 to M16 x 1.5 (STAUFF Test 20 to STAUFF Test 10) SAD-20/12-B-W3 Adaptor M16 X 2 to M16 x 1.5 (STAUFF Test 20 to STAUFF Test 10) SAD-20/12-B-W3 Adaptor M16 X 2 to M16 x 1.5 (STAUFF Test 20 to STAUFF Test 10) SAD-20/12-B-W3 Adaptor M16 X 2 to M16 x 1.5 (STAUFF Test 20 to STAUFF Test 10) SAD-20/12-B-W3 Adaptor M16 X 2 to M16 x 1.5 (STAUFF Test 20 to STAUFF Test 10) SAD-20/12-B-W3 Adaptor M16 X 2 to M16 x 1.5 (STAUFF Test 20 to STAUFF Test 10) SAD-20/12-B-W3 Adaptor M16 X 2 to M16 x 1.5 (STAUFF Test 20 to STAUFF Test 10) Sanor-PPC-04/12-T-M02 Screw-In Temperature Sensor for line installation (M10 x 1) Sensor-PPC-04/12-TSM Screw-In Temperature Sensor for line installation (M10 x 1) Sensor-PPC-CAN-T-M02 Screw-In Temperature Sensor for line installation (M10 x 1) Sensor-PPC-04/12-SFM-050 Straight Fitting with M10 x 1 connection for PPC-CAN-T-M02 SGV-16S-G-W3 Straight Fitting with M10 x 1 connection for PPC-CAN-T-M02 SGV-16S-G-W3 Straight Fitting with M10 x 1 connection for PPC-CAN-T-M02 SGV-16S-G-W3 Straight Fitting with M10 x 1 connection for PPC-CAN-T-M02 SGV-16S-G-W3 Straight Fitting with M10 x 1 connection for PPC-CAN-T-M02 SGV-16S-G-W3	Adaptor G1/4 to M16 x 2 (STAUFF Test 20)	SDA-20-G1/4-W3
Adaptor M16 X 2 to 512.65 x 1.5 (STAUFF Test 20 STAUFF Test 12) SAD-20/12-B-W3 Adaptor M16 X 2 to plug-in system (STAUFF Test 20 to STAUFF Test 10) SAD-20/10-B-W3 4. Temperature measurement (temperature sensors -40°C +150 °C/-40 °F +302 °F) Sensor-PPC-04/12-T-M02 Screw-In Temperature Sensor for line installation (M10 x 1) Sensor-PPC-04/12-T-M02 Screw-In Temperature Sensor for line installation (G1/4) Sensor-PPC-04/12-T-B02 Sdv hype Temperature Sensor for line installation (M10 x 1) Sensor-PPC-04/12-T-B02 Screw-In Temperature Sensor for line installation (M10 x 1) Sensor-PPC-04/12-T-B02 Screw-In Temperature Sensor for line installation (M10 x 1) Sensor-PPC-CANT-M02 Screw-In Temperature Sensor for line installation (M10 x 1) Sensor-PPC-CANT-M02 Screw-In Temperature Sensor for line installation (M10 x 1) Sensor-PPC-CANT-M02 Screw-In Temperature Sensor for line installation (M10 x 1) Sensor-PPC-CANT-M02 Strew-In Temperature Sensor for line installation (M10 x 1) Sensor-PPC-CANT-M02 Strew-In Temperature Sensor for line installation (M10 x 1) Sensor-PPC-CANT-M02 Strew-In Temperature Sensor for line installation (M10 x 1) Sensor-PPC-CANT-M02 Strew-In Temperature Sensor for line installation (M10 x 1) Sensor-PPC-CANT-M02 Strew-In Temperature Sensor for line in	Adaptor G1/2 to M16 x 2 (STAUFF Test 20)	SDA-20-G1/2-W3
Adaptor M16 X 2 to plug-in system (STAUFF Test 20 to STAUFF Test 10) SAD-20/10-B-W3 4. Temperature measurement (temperature sensors -40°C +150 °C/-40 °F +302 °F) Feasible Control Cont	Adaptor M16 X 2 to M16 x 1.5 (STAUFF Test 20 to STAUFF Test 15)	SAD-20/15-B-W3
Adaptor M16 X 2 to plug-in system (STAUFF Test 20 to STAUFF Test 10) SAD-20/10-B-W3 4. Temperature measurement (temperature sensors -40°C +150 °C/-40 °F +302 °F) Feasible Control Cont	Adaptor M16 X 2 to S12.65 x 1.5 (STAUFF Test 20 STAUFF Test 12)	SAD-20/12-B-W3
A. Temperature measurement (temperature sensors -40°C +150 °C/-40 °F +302 °F) Analogue Screw-In Temperature Sensor for line installation (61/4) Sensor-PPC-04/12-T-M02 Screw-In Temperature Sensor for line installation (61/4) Sensor-PPC-04/12-T-M02 Screw-In Temperature Sensor for line installation (61/4) Sensor-PPC-04/12-T-M02 Straight Fitting with M10 x 1 connection (for PPC-04/12-T-M02) SGV-16S-G-W3 CAN Screw-In Temperature Sensor for line installation (M10 x 1) Screw-In Temperature Sensor for line installation (M10 x 1) Sensor-PPC-CAN-T-M02 Screw-In Temperature Sensor for line installation (M10 x 1) Sensor-PPC-CAN-T-M02 Screw-In Temperature Sensor for line installation (M10 x 1) Sensor-PPC-CAN-T-M02 Straight Fitting with M10 x 1 connection (for PPC-CAN-T-M02) SGV-16S-G-W3 5. Flow Rate Measurement (Turbine Flow Meter SFM with integrated signal converter) Malogue Measuring range from 1 15 //min / 0.3 39 US GPM Flow-meter-PPC-04/12-SFM-015 Measuring range from 1 15 //min / 1 15.9 US GPM Flow-meter-PPC-04/12-SFM-016 Measuring range from 1 15 //min / 1 15.9 US GPM Flow-meter-PPC-04/12-SFM-016 Measuring range from 1 15 //min / 1 15.9 US GPM Flow-meter-PPC-04/12-SFM-016 Measuring range from 1 15 //min / 0.3		SAD-20/10-B-W3
Screw-In Temperature Sensor for line installation (M10 x 1) Sensor-PPC-04/12-T-M02 Screw-In Temperature Sensor for line installation (G1/4) Sensor-PPC-04/12-T-B02 Rod-type Temperature Sensor for line installation (G1/4) Sensor-PPC-04/12-T-B02 Straight Fitting with M10 x 1 connection (for PPC-04/12-T-M02) Sclv-16S-G-W3 CAN Sensor-PPC-CAN-T-M02 Screw-In Temperature Sensor for line installation (M10 x 1) Sensor-PPC-CAN-T-M02 Screw-In Temperature Sensor for line installation (M10 x 1) Sensor-PPC-CAN-T-B02 Straight Fitting with M10 x 1 connection (for PPC-CAN-T-M02) Screw-In Temperature Sensor for line installation (G1/4) Straight Fitting with M10 x 1 connection (for PPC-CAN-T-M02) ScV-16S-G-W3 Straight Fitting with M10 x 1 connection (for PPC-CAN-T-M02) ScV-16S-G-W3 Analogue Measuring range forn 1 15 /min / 0.3 3.9 US GPM Flow-meter-PPC-04/12-SFM-015 Measuring range forn 1 50 /min / 1.6 39.6 US GPM Flow-meter-PPC-04/12-SFM-300 Measuring range forn 1 15 /min / 0.3 3.9 US GPM Flow-meter-PPC-CAN-SFM-150 Measuring range forn 1 15 /min / 0.3 3.9 US GPM Flow-meter-PPC-CAN-SFM-060 Measuring range forn 1 15 /min / 0.3 3.9 US GPM Flow-meter-PPC-CAN-SFM-150 Measuring	4. Temperature measurement (temperature sensors -40°C +150 °C/-40 °F +302 °F)	
Screw-In Temperature Sensor for line installation (G1/4) Sensor-PPC-04/12-T-B02 Rod-type Temperature Sensor for tank/reservoir measurements Sensor-PPC-04/12-TSH Straight Fitting with M10 x 1 connection (for PPC-04/12-TM02) SGV-16S-6-W3 CAN Sensor-PPC-CAN-T-M02 Screw-In Temperature Sensor for line installation (M10 x 1) Sensor-PPC-CAN-T-B02 Straight Fitting with M10 x 1 connection (for PPC-CAN-T-M02) SGV-16S-6-W3 Straight Fitting with M10 x 1 connection (for PPC-CAN-T-M02) SGV-16S-6-W3 Straight Fitting with M10 x 1 connection (for PPC-CAN-T-M02) SGV-16S-6-W3 Straight Fitting with M10 x 1 connection (for PPC-CAN-T-M02) SGV-16S-6-W3 Straight Fitting with M10 x 1 connection (for PPC-CAN-T-M02) SGV-16S-6-W3 Straight Fitting with M10 x 1 connection (for PPC-CAN-T-M02) SGV-16S-6-W3 Straight Fitting with M10 x 1 connection (for PPC-CAN-T-M02) SGV-16S-6-W3 Straight Fitting with M10 x 1 connection (for PPC-CAN-T-M02) SGV-16S-6-W3 Straight Fitting with M10 x 1 connection (for PPC-CAN-T-M02) SGV-16S-6-W3 Straight Fitting with M10 x 1 connection (for PPC-CAN-T-M02) SGV-16S-6-W3 Straight Fitting with M10 x 1 connection (for PPC-CAN-T-M02) SGV-16S-6-W3 Straight Fitting with M10 x 1 connection (for PPC-CAN-SFM-015 <t< td=""><td>Analogue</td><td></td></t<>	Analogue	
Rod-type Temperature Sensor for tank/reservoir measurements Sensor-PPC-04/12-TSH Straight Fitting with M10 x 1 connection (for PPC-04/12-TM02) SGV-16S-G-W3 CAN Screw-In Temperature Sensor for line installation (M10 x 1) Sensor-PPC-CAN-T-M02 Screw-In Temperature Sensor for line installation (G1/4) Sensor-PPC-CAN-T-B02 Straight Fitting with M10 x 1 connection (for PPC-CAN-T-M02) SGV-16S-G-W3 5. Flow Rate Measurement (Turbine Flow Meter SFM with integrated signal converter) Sensor-PPC-04/12-SFM-015 Analogue Measuring range from 1 15 /min / 0.3 3.9 US GPM Flow-meter-PPC-04/12-SFM-0160 Measuring range from 1 15 /min / 0.3 3.9 US GPM Flow-meter-PPC-04/12-SFM-060 Measuring range from 1 15.9 US GPM Measuring range from 0 000 /min / 1 15.9 US GPM Flow-meter-PPC-04/12-SFM-060 Measuring range from 1 15 /min / 0.3 3.9 US GPM Measuring range from 1 15 /min / 0.3 3.9 US GPM Flow-meter-PPC-04/12-SFM-060 Measuring range from 1 15 /min / 0.3 158 US GPM Flow-meter-PPC-04/12-SFM-060 Measuring range from 1 15 /min / 0.3 3.9 US GPM Flow-meter-PPC-04/12-SFM-060 Measuring range from 1 15 /min / 0.3 3.9 US GPM Flow-meter-PPC-04/12-SFM-060 Measuring range from 1 15 /min / 0.3 3.9 US GPM Flow-meter-PPC-CAN-SFM-060 Measuring range from 1 15 /min / 0.3 3.9 US GPM<	Screw-In Temperature Sensor for line installation (M10 x 1)	Sensor-PPC-04/12-T-M02
Rod-type Temperature Sensor for tank/reservoir measurements Sensor-PPC-04/12-TSH Straight Fitting with M10 x 1 connection (for PPC-04/12-TM02) SGV-16S-G-W3 CAN Screw-In Temperature Sensor for line installation (M10 x 1) Sensor-PPC-CAN-T-M02 Screw-In Temperature Sensor for line installation (G1/4) Sensor-PPC-CAN-T-B02 Straight Fitting with M10 x 1 connection (for PPC-CAN-T-M02) SGV-16S-G-W3 5. Flow Rate Measurement (Turbine Flow Meter SFM with integrated signal converter) Sensor-PPC-04/12-SFM-015 Analogue Measuring range from 1 15 /min / 0.3 3.9 US GPM Flow-meter-PPC-04/12-SFM-0160 Measuring range from 1 15 /min / 0.3 3.9 US GPM Flow-meter-PPC-04/12-SFM-060 Measuring range from 1 15.9 US GPM Measuring range from 0 000 /min / 1 15.9 US GPM Flow-meter-PPC-04/12-SFM-060 Measuring range from 1 15 /min / 0.3 3.9 US GPM Measuring range from 1 15 /min / 0.3 3.9 US GPM Flow-meter-PPC-04/12-SFM-060 Measuring range from 1 15 /min / 0.3 158 US GPM Flow-meter-PPC-04/12-SFM-060 Measuring range from 1 15 /min / 0.3 3.9 US GPM Flow-meter-PPC-04/12-SFM-060 Measuring range from 1 15 /min / 0.3 3.9 US GPM Flow-meter-PPC-04/12-SFM-060 Measuring range from 1 15 /min / 0.3 3.9 US GPM Flow-meter-PPC-CAN-SFM-060 Measuring range from 1 15 /min / 0.3 3.9 US GPM<	Screw-In Temperature Sensor for line installation (G1/4)	Sensor-PPC-04/12-T-B02
Straight Fitting with M10 x 1 connection (for PPC-04/12-T-M02) SGV-16S-G-W3 CAN Sensor-PPC-CAN-T-M02 Screw-In Temperature Sensor for line installation (G1/4) Sensor-PPC-CAN-T-B02 Straight Fitting with M10 x 1 connection (for PPC-CAN-T-M02) SGV-16S-G-W3 Straight Fitting with M10 x 1 connection (for PPC-CAN-T-M02) SGV-16S-G-W3 Straight Fitting with M10 x 1 connection (for PPC-CAN-T-M02) SGV-16S-G-W3 Straight Fitting with M10 x 1 connection (for PPC-CAN-T-M02) SGV-16S-G-W3 Straight Fitting with M10 x 1 connection (for PPC-CAN-T-M02) SGV-16S-G-W3 Straight Fitting with M10 x 1 connection (for PPC-CAN-T-M02) SGV-16S-G-W3 Straight Fitting with M10 x 1 connection (for PPC-CAN-T-M02) SGV-16S-G-W3 Straight Fitting with M10 x 1 connection (for PPC-CAN-T-M02) SGV-16S-G-W3 Straight Fitting with M10 x 1 connection (for PPC-CAN-T-M02) SGV-16S-G-W3 Straight Fitting with M10 x 1 connection (for PPC-CAN-T-M02) SGV-16S-G-W3 Measuring range from 1 15 //min / 1.3 3.9 US GPM Flow-meter-PPC-04/12-SFM-060 Measuring range from 1 15 //min / 0.3 3.9 US GPM Flow-meter-PPC-CAN-SFM-050 Measuring range from 1 15 //min / 0.3 3.9 US GPM Flow-meter-PPC-CAN-SFM-050 Measuring range from 1 15 //min / 0.3 3.9 US GPM </td <td></td> <td>Sensor-PPC-04/12-TSH</td>		Sensor-PPC-04/12-TSH
CAN Sensor-PPC-CAN-T-M02 Screw-In Temperature Sensor for line installation (M10 x 1) Sensor-PPC-CAN-T-B02 Straight Fitting with M10 x 1 connection (for PPC-CAN-T-M02) SGV-16S-G-W3 Straight Fitting with M10 x 1 connection (for PPC-CAN-T-M02) SGV-16S-G-W3 S. Flow Rate Measurement (Turbine Flow Meter SFM with integrated signal converter) Malogue Analogue Flow-meter-PPC-04/12-SFM-015 Measuring range from 1 15 /min / 0.3 3.9 US GPM Flow-meter-PPC-04/12-SFM-060 Measuring range from 6 150 /min / 1 15.9 US GPM Flow-meter-PPC-04/12-SFM-060 Measuring range from 10 300 /min / 2.7 79 US GPM Flow-meter-PPC-04/12-SFM-150 Measuring range from 10 300 /min / 5.3 158 US GPM Flow-meter-PPC-04/12-SFM-600 CAN Tuber-PPC-04/12-SFM-600 CN Measuring range from 1 15 /min / 0.3 3.9 US GPM Flow-meter-PPC-04/12-SFM-600 Measuring range from 1 30 //min / 1 15.9 US GPM Flow-meter-PPC-04/12-SFM-600 Measuring range from 1 15 //min / 0.3 3.9 US GPM Flow-meter-PPC-CAN-SFM-015 Measuring range from 6 150 //min / 1 15.9 US GPM Flow-meter-PPC-CAN-SFM-150 Measuring range from 6 300 //min / 2.7 79 US GPM Flow-meter-PPC-CAN-SFM-150 Measuring range from 1 30 //min / 3.3 158 US GP		SGV-16S-G-W3
Screw-In Temperature Sensor for line installation (M10 x 1) Sensor-PPC-CAN-T-M02 Screw-In Temperature Sensor for line installation (G1/4) Sensor-PPC-CAN-T-B02 Straight Fitting with M10 x 1 connection (for PPC-CAN-T-M02) SGV-16S-G-W3 5. Flow Rate Measurement (Turbine Flow Meter SFM with integrated signal converter) Sensor-PPC-04/12-SFM-015 Measuring range from 1 15 //min / 0.3 3.9 US GPM Flow-meter-PPC-04/12-SFM-015 Measuring range from 6 150 //min / 1 15.9 US GPM Flow-meter-PPC-04/12-SFM-060 Measuring range from 1 03 //min / 2.7 79 US GPM Flow-meter-PPC-04/12-SFM-300 Measuring range from 1 15 //min / 0.3 3.9 US GPM Flow-meter-PPC-04/12-SFM-300 Measuring range from 1 03 //min / 2.7 79 US GPM Flow-meter-PPC-04/12-SFM-300 Measuring range from 1 15 //min / 0.3 3.9 US GPM Flow-meter-PPC-04/12-SFM-300 Measuring range from 1 15 //min / 0.3 3.9 US GPM Flow-meter-PPC-04/12-SFM-300 Measuring range from 1 15 //min / 0.3 3.9 US GPM Flow-meter-PPC-CAN-SFM-015 Measuring range from 1 15 //min / 0.3 3.9 US GPM Flow-meter-PPC-CAN-SFM-015 Measuring range from 1 15 //min / 1.6 39.6 US GPM Flow-meter-PPC-CAN-SFM-015 Measuring range from 1 15 //min / 1.6 39.6 US GPM Flow-meter-PPC-CAN-SFM-150 M		
Screw-In Temperature Sensor for line installation (G1/4) Sensor-PPC-CAN-T-B02 Straight Fitting with M10 x 1 connection (for PPC-CAN-T-M02) SGV-16S-G-W3 5. Flow Rate Measurement (Turbine Flow Meter SFM with integrated signal converter) Analogue Measuring range from 1 15 //min / 0.3 3.9 US GPM Flow-meter-PPC-04/12-SFM-015 Measuring range from 4 60 //min / 1 15.9 US GPM Flow-meter-PPC-04/12-SFM-060 Measuring range from 5 30.0 //min / 1 15.9 US GPM Flow-meter-PPC-04/12-SFM-060 Measuring range from 6 150 //min / 1 15.9 US GPM Flow-meter-PPC-04/12-SFM-300 Measuring range from 1 15 //min / 0.3 3.9 US GPM Flow-meter-PPC-04/12-SFM-300 Measuring range from 7 0 300 //min / 2.7 79 US GPM Flow-meter-PPC-04/12-SFM-300 Measuring range from 1 15 //min / 0.3 3.9 US GPM Flow-meter-PPC-CAN-SFM-015 Measuring range from 1 15 //min / 0.3 3.9 US GPM Flow-meter-PPC-CAN-SFM-015 Measuring range from 6 150 //min / 1 15.9 US GPM Flow-meter-PPC-CAN-SFM-060 Measuring range from 6 150 //min / 1 15.9 US GPM Flow-meter-PPC-CAN-SFM-060 Measuring range from 0 300 //min / 2.7 79 US GPM Flow-meter-PPC-CAN-SFM-060 Measuring range from 1 15 //min / 2.7 79 US GPM Flow-meter-PPC-CAN-SFM-300 Measuring range fro		Sansor-PPC-CAN-T-M02
Straight Fitting with M10 x 1 connection (for PPC-CAN-T-M02) SGV-16S-G-W3 5. Flow Rate Measurement (Turbine Flow Meter SFM with integrated signal converter) Analogue Measuring range from 1 15 l/min / 0.3 3.9 US GPM Flow-meter-PPC-04/12-SFM-015 Measuring range from 4 60 l/min / 1 15.9 US GPM Flow-meter-PPC-04/12-SFM-060 Measuring range from 6 150 l/min / 1.6 39.6 US GPM Flow-meter-PPC-04/12-SFM-060 Measuring range from 10 300 l/min / 2.7 79 US GPM Flow-meter-PPC-04/12-SFM-300 Measuring range from 20 600 l/min / 5.3 158 US GPM Flow-meter-PPC-04/12-SFM-600 CAN Measuring range from 4 60 l/min / 1 15.9 US GPM Flow-meter-PPC-CAN-SFM-015 Measuring range from 1 15 l/min / 0.3 3.9 US GPM Flow-meter-PPC-CAN-SFM-015 Measuring range from 4 60 l/min / 1 15.9 US GPM Flow-meter-PPC-CAN-SFM-015 Measuring range from 6 150 l/min / 1.6 39.6 US GPM Flow-meter-PPC-CAN-SFM-060 Measuring range from 10 300 l/min / 2.7 79 US GPM Flow-meter-PPC-CAN-SFM-150 Measuring range from 10 300 l/min / 2.7 79 US GPM Flow-meter-PPC-CAN-SFM-150 Measuring range from 20 600 l/min / 1 15.9 US GPM Flow-meter-PPC-CAN-SFM-150 Measuring range from 20 600 l/min / 1.5.3 158 US GPM Flow-meter-PPC-CAN-SFM-600		
5. Flow Rate Measurement (Turbine Flow Meter SFM with integrated signal converter) Analogue Measuring range from 1 15 l/min / 0.3 3.9 US GPM Flow-meter-PPC-04/12-SFM-015 Measuring range from 4 60 l/min / 1 15.9 US GPM Flow-meter-PPC-04/12-SFM-060 Measuring range from 5 150 l/min / 1.6 39.6 US GPM Flow-meter-PPC-04/12-SFM-150 Measuring range from 10 300 l/min / 2.7 79 US GPM Flow-meter-PPC-04/12-SFM-300 Measuring range from 10 300 l/min / 5.3 158 US GPM Flow-meter-PPC-04/12-SFM-600 CAN Flow-meter-PPC-CAN-SFM-015 Measuring range from 1 15 l/min / 0.3 3.9 US GPM Flow-meter-PPC-CAN-SFM-015 Measuring range from 4 60 l/min / 1 15.9 US GPM Flow-meter-PPC-CAN-SFM-015 Measuring range from 1 15 l/min / 0.3 3.9 US GPM Flow-meter-PPC-CAN-SFM-015 Measuring range from 1 15.0 l/min / 1 15.9 US GPM Flow-meter-PPC-CAN-SFM-060 Measuring range from 0 300 l/min / 1 15.9 US GPM Flow-meter-PPC-CAN-SFM-150 Measuring range from 10 300 l/min / 1 15.9 US GPM Flow-meter-PPC-CAN-SFM-600 Measuring range from 10 300 l/min / 1 15.8 US GPM Flow-meter-PPC-CAN-SFM-600 Measuring range from 20 600 l/min / 1 15.8 US GPM Flow-meter-PPC-CAN-SFM-600 Measuring range from 20 600 l/		
Analogue Measuring range from 1 15 l/min / 0.3 3.9 US GPM Flow-meter-PPC-04/12-SFM-015 Measuring range from 4 60 l/min / 1 15.9 US GPM Flow-meter-PPC-04/12-SFM-060 Measuring range from 6 150 l/min / 1.6 39.6 US GPM Flow-meter-PPC-04/12-SFM-150 Measuring range from 1 300 l/min / 2.7 79 US GPM Flow-meter-PPC-04/12-SFM-300 Measuring range from 20 600 l/min / 5.3 158 US GPM Flow-meter-PPC-04/12-SFM-600 CAN Measuring range from 1 15 l/min / 0.3 3.9 US GPM Flow-meter-PPC-CAN-SFM-015 Measuring range from 4 60 l/min / 1 15.9 US GPM Flow-meter-PPC-CAN-SFM-015 Measuring range from 1 15 l/min / 0.3 3.9 US GPM Flow-meter-PPC-CAN-SFM-015 Measuring range from 1 15 l/min / 0.3 3.9 US GPM Flow-meter-PPC-CAN-SFM-015 Measuring range from 1 15 l/min / 1.6 39.6 US GPM Flow-meter-PPC-CAN-SFM-060 Measuring range from 1 15 l/min / 1.6 39.6 US GPM Flow-meter-PPC-CAN-SFM-060 Measuring range from 0 300 l/min / 2.7 79 US GPM Flow-meter-PPC-CAN-SFM-060 Measuring range from 1 0 300 l/min / 2.7 79 US GPM Flow-meter-PPC-CAN-SFM-060 Measuring range from 2 0 600 l/min / 5.3 158 US GPM Flow-meter-PPC-CAN-SFM-600 6. Rotational speed measurement Flow-meter-PPC-CAN-SFM-60		56V-105-6-W3
Measuring range from 1 15 I/min / 0.3 3.9 US GPM Flow-meter-PPC-04/12-SFM-060 Measuring range from 4 60 I/min / 1 15.9 US GPM Flow-meter-PPC-04/12-SFM-060 Measuring range from 6 150 I/min / 1.6 39.6 US GPM Flow-meter-PPC-04/12-SFM-150 Measuring range from 1 0 300 I/min / 2.7 79 US GPM Flow-meter-PPC-04/12-SFM-300 Measuring range from 2 0 600 I/min / 5.3 158 US GPM Flow-meter-PPC-04/12-SFM-600 CAN	· · · · · · · · · · · · · · · · · · ·	
Measuring range from 4 60 I/min / 1 15.9 US GPM Flow-meter-PPC-04/12-SFM-060 Measuring range from 6 150 I/min / 1.6 39.6 US GPM Flow-meter-PPC-04/12-SFM-150 Measuring range from 1 0 300 I/min / 2.7 79 US GPM Flow-meter-PPC-04/12-SFM-300 Measuring range from 2 0 600 I/min / 5.3 158 US GPM Flow-meter-PPC-04/12-SFM-600 CAN Measuring range from 1 15 I/min / 0.3 3.9 US GPM Flow-meter-PPC-CAN-SFM-015 Measuring range from 4 60 I/min / 1 15.9 US GPM Flow-meter-PPC-CAN-SFM-060 Measuring range from 4 60 I/min / 1 15.9 US GPM Flow-meter-PPC-CAN-SFM-060 Measuring range from 6 150 I/min / 1 15.9 US GPM Flow-meter-PPC-CAN-SFM-060 Measuring range from 6 150 I/min / 1 15.9 US GPM Flow-meter-PPC-CAN-SFM-060 Measuring range from 7 300 I/min / 2.7 79 US GPM Flow-meter-PPC-CAN-SFM-060 Measuring range from 2 600 I/min / 2.7 79 US GPM Flow-meter-PPC-CAN-SFM-300 Measuring range from 2 600 I/min / 5.3 158 US GPM Flow-meter-PPC-CAN-SFM-600 6. Rotational speed measurement Flow-meter-PPC-CAN-SFM-600 Analogue Sensor-PPC-04/12-SDS-CAB	•	Flow motor DDC 04/10 CEM 015
Measuring range from 6 150 //min / 1.6 39.6 US GPM Flow-meter-PPC-04/12-SFM-150 Measuring range from 1 300 //min / 2.7 79 US GPM Flow-meter-PPC-04/12-SFM-300 Measuring range from 2 600 //min / 5.3 158 US GPM Flow-meter-PPC-04/12-SFM-600 CAN		
Measuring range from 10 300 I/min / 2.7 79 US GPM Flow-meter-PPC-04/12-SFM-300 Measuring range from 20 600 I/min / 5.3 158 US GPM Flow-meter-PPC-04/12-SFM-600 CAN		
Measuring range from 20 600 l/min / 5.3 158 US GPM Flow-meter-PPC-04/12-SFM-600 CAN Measuring range from 1 15 l/min / 0.3 3.9 US GPM Flow-meter-PPC-CAN-SFM-015 Measuring range from 4 60 l/min / 1 15.9 US GPM Flow-meter-PPC-CAN-SFM-060 Measuring range from 6 150 l/min / 1 15.9 US GPM Flow-meter-PPC-CAN-SFM-060 Measuring range from 10 300 l/min / 2.7 79 US GPM Flow-meter-PPC-CAN-SFM-300 Measuring range from 20 600 l/min / 5.3 158 US GPM Flow-meter-PPC-CAN-SFM-600 6. Rotational speed measurement Flow-meter-PPC-CAN-SFM-600 Analogue Speed Sensor with integrated Connection Cable 2 m/6.56 ft		
CAN Flow-meter-PPC-CAN-SFM-015 Measuring range from 1 15 I/min / 0.3 3.9 US GPM Flow-meter-PPC-CAN-SFM-060 Measuring range from 4 60 I/min / 1 15.9 US GPM Flow-meter-PPC-CAN-SFM-060 Measuring range from 6 150 I/min / 1.6 39.6 US GPM Flow-meter-PPC-CAN-SFM-150 Measuring range from 10 300 I/min / 2.7 79 US GPM Flow-meter-PPC-CAN-SFM-300 Measuring range from 20 600 I/min / 5.3 158 US GPM Flow-meter-PPC-CAN-SFM-600 6. Rotational speed measurement Flow-meter-PPC-04/12-SDS-CAB	Measuring range from 10 300 I/min / 2.7 79 US GPM	Flow-meter-PPC-04/12-SFM-300
Measuring range from 1 15 I/min / 0.3 3.9 US GPM Flow-meter-PPC-CAN-SFM-015 Measuring range from 4 60 I/min / 1 15.9 US GPM Flow-meter-PPC-CAN-SFM-060 Measuring range from 6 150 I/min / 1.6 39.6 US GPM Flow-meter-PPC-CAN-SFM-150 Measuring range from 10 300 I/min / 2.7 79 US GPM Flow-meter-PPC-CAN-SFM-300 Measuring range from 20 600 I/min / 5.3 158 US GPM Flow-meter-PPC-CAN-SFM-600 6. Rotational speed measurement Flow-meter-PPC-CAN-SFM-600 Analogue Speed Sensor with integrated Connection Cable 2 m/6.56 ft		Flow-meter-PPC-04/12-SFM-600
Measuring range from 4 60 I/min / 1 15.9 US GPM Flow-meter-PPC-CAN-SFM-060 Measuring range from 6 150 I/min / 1.6 39.6 US GPM Flow-meter-PPC-CAN-SFM-150 Measuring range from 10 300 I/min / 2.7 79 US GPM Flow-meter-PPC-CAN-SFM-300 Measuring range from 20 600 I/min / 5.3 158 US GPM Flow-meter-PPC-CAN-SFM-600 6. Rotational speed measurement Flow-meter-PPC-CAN-SFM-600 Analogue Speed Sensor with integrated Connection Cable 2 m/6.56 ft		Flow-mater-PPC_CAN_SEM_015
Measuring range from 6 150 l/min / 1.6 39.6 US GPM Flow-meter-PPC-CAN-SFM-150 Measuring range from 10 300 l/min / 2.7 79 US GPM Flow-meter-PPC-CAN-SFM-300 Measuring range from 20 600 l/min / 5.3 158 US GPM Flow-meter-PPC-CAN-SFM-600 6. Rotational speed measurement Flow-meter-PPC-CAN-SFM-600 Analogue Speed Sensor with integrated Connection Cable 2 m/6.56 ft		
Measuring range from 10 300 l/min / 2.7 79 US GPM Flow-meter-PPC-CAN-SFM-300 Measuring range from 20 600 l/min / 5.3 158 US GPM Flow-meter-PPC-CAN-SFM-600 6. Rotational speed measurement Flow-meter-PPC-CAN-SFM-600 Analogue Speed Sensor with integrated Connection Cable 2 m/6.56 ft		
Measuring range from 20 600 l/min / 5.3 158 US GPM Flow-meter-PPC-CAN-SFM-600 6. Rotational speed measurement Analogue Speed Sensor with integrated Connection Cable 2 m/6.56 ft Sensor-PPC-04/12-SDS-CAB		
6. Rotational speed measurement Analogue Speed Sensor with integrated Connection Cable 2 m/6.56 ft Sensor-PPC-04/12-SDS-CAB		Flow-meter-PPC-CAN-SFM-300
Analogue Speed Sensor with integrated Connection Cable 2 m/6.56 ft Sensor-PPC-04/12-SDS-CAB	Measuring range from 20 600 I/min / 5.3 158 US GPM	Flow-meter-PPC-CAN-SFM-600
Speed Sensor with integrated Connection Cable 2 m/6.56 ft Sensor-PPC-04/12-SDS-CAB	6. Rotational speed measurement	
	*	
Contact Adaptor Adaptor-PPC-04/12-SKA-contact		Sensor-PPC-04/12-SDS-CAB
	Contact Adaptor	Adaptor-PPC-04/12-SKA-contact
Focusing Adaptor Adaptor-PPC-04/12-SFA-focus	Focusing Adaptor	Adaptor-PPC-04/12-SFA-focus

B

Wireless Pressure Measurement System PT-RF



The PT-RF series of pressure transmitters are an alternative solution for universal pressure measurements for fluid technology applications, which will provide benefits for system operators, maintenance personnel and repair technicians as well as for original equipment manufacturers.

The advantages resulting from the use of the new technology for system operators, maintenance personnel and repair technicians are clear: Measurements can be carried very easily, without extensive training and within a few seconds at the press of a button and then documented in a reliable process.


Unscrewing and re-installing pressure gauges or other measuring and display devices – practically a temporary opening of the system – is not required. Potential hazards for people, machines and the environment, for example from emitted waste oil in the test hose or leaks at the measuring point, as well as ingress of dirt into the system (e.g. in dusty environments) can be effectively excluded. Original equipment manufacturers will also benefit from this new technology: If the pressure transmitters are installed at their factory already, the innovative technology can provide a competitive edge over alternative suppliers and open up specific advantages for the users, increasing the value retention of their own devices in the long term.


If the pressure transmitters are installed directly in the system or pipeline for permanent use, they protrude only slightly more than conventional hydraulic test couplings and meet the highest demands with regard to space requirements and weight.

Pressure Transmitter • Type PT-RF



94 34) 1.85) 47 12 G1/4 Ø18,9 (.74)





R

B

Product Description

The pressure transmitters from the PT-RF series are integrated into fluid technology plants and systems permanently or temporarily using the appropriate process connection adapters. The energy required for a measurement is transferred to the pressure transmitter via the antenna of the reading device using wireless RFID technology. This means that the pressure transmitters require neither internal nor external power supply and are completely maintenance-free.

Technical Data

Wetted Parts

- Suitable for liquid and gaseous media

Materials

Housing:	Stainless Steel 1.4305
Sealing (B04):	FKM (Viton®)
Cap:	Polyamide (glass fibre-reinforced)
Dimensions / Weight	
Dimensions:	59 x 26 mm / 2.32 x 1.02 in

59 x 26 mm / 2.32 x 1.02 in 80 g / .18 lbs

Temperature Range

· Weight:

Media temp. (N04):	-40°C +135°C / -40°F +275°F
Media temp. (B04):	-30°C +135°C / -22°F +275°F
Ambient temp.:	-40 °C +85 °C / -40 °F +185 °F
Storage temp.:	-55 °C+125 °C / -67 °F +257 °F
Electrical Data	


- typ. 250 ms / max. 400 ms Sampling rate: Long-term stability: according to IEC EN 60770-1
 - max. ± 0,25 % FS* /a 10
- Load cycles (10⁶): Vibration loading:
- acc. to IEC 60068-2-6 (20 g) Shock loading: acc. to IEC 60068-2-27 (30 g) 11ms

Protection Rating

IP69 protection rating: Dust tight and protected against

high-pressure and steam cleaning

Process connection G1/4 (B04)

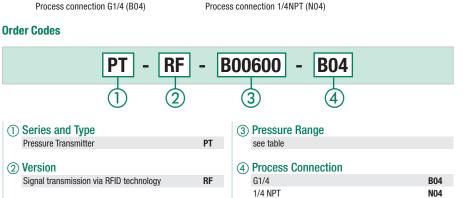

Pressure Range and Accuracies

Version	Pressure Range and Accuracies									
Pressure Trans- mitter PT-RF	Pressure Range (^{bar} / _{PSI})	Type of Measurement	Maximum Pressure (^{bar} / _{PSI})	Burst Pressure (^{bar} / _{PSI})	Accuracy (±% FS*) typ.	Accuracy (±% FS*) max.				
B00016	0 16	Deleting another	32	48	0.05	0,5				
	0 232	Relative pressure	464	696	0,25					
Baaaaa	0 60	Deletine evene	120	180	0,25	0,5				
B00060	0 870	Relative pressure	1740	2610						
D00100	0 160	D. L. P.	320	480	0.05	0,5				
B00160	0 2320	Relative pressure	4641	6961	0,25					
D00400	0 400	Deletive	800	1200	0.05	0,5				
B00400	0 5801	Relative pressure	11603	17405	0,25					
Doocoo	0 600	Deletive evenes	1200	1800	0.05	0.5				
B00600	0 8702	Relative pressure	17404	26107	0,25	0,5				

Temperature behaviour: max. ± 0,2 % FS* /10K (test condition 25 °C; 45 % r. H.)

* FS = Full Scale

Process Connection Adaptors for Pressure Transmitter PT-RF

Various adaptors are available in addition to the pressure transmitters from the PT-RF series, allowing connection to the known STAUFF Test 20 system as well as installation in pipes.



SDA-20-G1/4-W3 Adaptor for process connection G1/4 (B04) on test coupling STAUFF Test 20 (connection thread M16 x 2)



SRS-G1/4-***-V-G-W3 Straight fitting with adaptor Note: Please replace *** with tube-Ø and series (L or S).



SMD-20-1/4NPT-W3 Adaptor for process connection 1/4NPT (N04) on test coupling STAUFF Test 20 (connection thread M16 x 2)

Dimensional drawing: All dimensions in mm (in).

www.stauff.com/8/en/#54



Reader • Type Reader-PT-RF




B

Order Code

Reader

Set Up

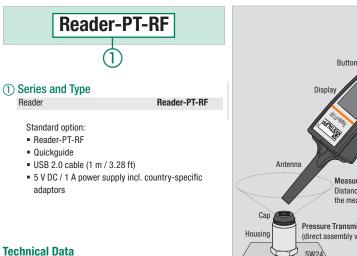

Material


Housing made of ABS

Dimensions / Weight

- 76 x 35 x 240 mm / 3.0 x 1.38 x 9.45 in Dimensions:
- Weight: 220 g / .49 lbs

Measurements / Display

- Pressure: in bar and PSI
- Temperature: in °C and °F
- graphic, LED backlit Display:
- Visible area: 55 x 46 mm / 2.17 x 1.81 in
- Resolution: 128 x 64 Pixel



Power Supply

- Battery: Lithium Ion (3.7 V DC / 900 mAh) · Operating time approx. 6h (approx. 1800 individual
- measurement)

Temperature Range

CE certified

- -20 °C ... +70 °C / -4 °F ... +158 °F Ambient temp.:
- -25 °C ... +60 °C / -13 °F ... +140 °F Storage temp.:

Product Description

Connection

The hand-held readers transfer the energy required for a measurement to the pressure transmitter using RFID technology. All that is required is a maximum distance of 1.5 cm / 0.6 in from the antenna to the tip of the pressure transmitter for the duration of the measurement

When the pressure transmitter is activated by the press of a button, a current measured value is determined within only 0.5 seconds and then immediately transmitted back to the reading device together with other relevant information and then output on the illuminated display and stored. Over 15,000 of these measurement sets can be stored in the internal memory of the device.

PC Software

The software included with the delivery allows transmission of the stored measured values from the reading device to the PC, subsequent evaluation and export, e.g. to Microsoft Excel®.

Electrical Data / Interface

- typ. 250 ms / max. 400 ms Sampling rate:
- Interface: Micro USB = EMV:
 - EN 61326-1:2013
 - EN 300330

Protection Rating

· IP65 protection rating: Dust tight and protected against water jets

Type of Measurement

Start Measurement

1. Switch on the reader using the (b) function button.

During the brief start process, the charge state of the lithium ion battery (Battery) is shown on the display and the share of the currently occupied data memory (MemUsed) in percent as well as the current date and time.

2. Position the tip of the antenna of the reader inside the measurement range of the pressure transmitter and hold this position as long as possible during the entire measurement process.

Individual Measurement (Single Value)


3. Start the individual measurement by tapping the function button once.

Permanent Measurement (Multiple Values)


3. Start the permanent measurement by holding down the 🔊 function button.

The simplest way of recognising the successful start of a permanent measurement is the change in the corresponding symbol in the upper right-hand corner of the display. The absolute number of the values determined as part of the measurement process is shown below the current pressure.

4. End a continuous measurement by releasing the function key.



Display after successful individual measurement



Display after successful permanent measurement

Complete system • Type PT-RF-SET




Complete system in case PT-RF-SET

Product Description

The PT-RF-SET complete system is compiled in different versions according to customer requirements. All complete systems are supplied in a handy carrying case containing individually shaped foam inserts for a maximum of 10 pressure transmitters and 10 process connection adaptors and offering space for the following components:

Standard Option

- 1x Reader-PT-RF
- up to 3 Pressure Transmitters PT-RF
- up to 3 Process Connection Adaptors SDA or SMD
- 1x Quickguide
- 1x USB 2.0 cable(1 m / 3.28 ft)
- 1x Power Supply incl. country-specific adaptors

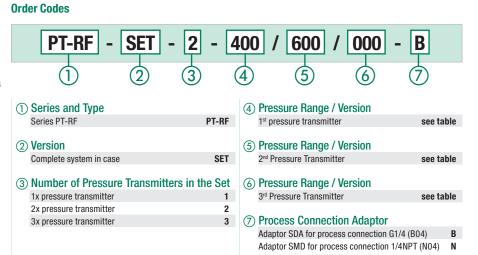

Pressure Transmitter: Pressure Range and Version

Pressure Range	Version of Pressure Transmitter					
000	When ordering a complete system w	ith one or two pressure transmitters, t	he pressure range for the			
000	2 nd and 3 rd pressure transmitter is given as "000".					
016	Version pressure transmitter: B00016 (pressure range: 0 16 bar / 0 232 PSI)					
060	Version pressure transmitter: B00060 (pressure range: 0 60 bar / 0 870 PSI)					
160	Version pressure transmitter: B00160 (pressure range: 0 160 bar / 0 2320 PSI)					
400	Version pressure transmitter: B00	400 (pressure range: 0 400 bar /	0 5801 PSI)			
600	Version pressure transmitter: B00	600 (pressure range: 0 600 bar /	0 8702 PSI)			
e.g.	400 (400 bar)	600 (600 bar)	000 (0 bar)			

Spare Parts / Accessories



Case-Reader-PT-RF

Product Description

In addition to the Charger-Set-Reader-PT-RF which is available as a spare part, the Case-PT-RF-Set is also available as an individual item for assembling a complete system later on.

The Case-Reader-PT-RF is available if only a storage case for the reading device is required. It only provides space for the reading device and the associated accessories (without pressure transmitters and process connection adaptors).

Order Codes



Case, small	Case-Reader-PT-RF
Case, large	Case-PT-RF-SET
5 V DC / 1 A power supply	Power-Supply-PT-RF-
incl. country-specific	Reader-MULTI
adaptors and USB 2.0 cable	
Adaptor for pressure transmitte	r (B04) SDA-20-G1/4-W3
Adaptor for pressure transmitte	r (N04)SMD-20-1/4NPT-W3
Straight fitting with adaptor	SRS-G1/4-***-V-G-W3



Software PT-RF-Soft

Option for complete documentation of test results, display of pressure curves, export of measurement data via CSV file and creation of customer-specific measurement reports.

	Sensor Name	indemine .	Time From		Until	-				-	_	
PT-RF-Soft V1.17	Accum-H46-987		00:00:00,000 DD.MM.YYYY		DD:00:00,000		Filter Res	et	1	Delete Selec	ted	Clear Table
Not connected	Sensor Name Serial	Number Machine	Date	Time	Rec. Pressure		Rec. Temperati		ID	Type of Measure	m Seq. N	lo Pressure ma
	Accum-H46-987 00010	C Arbug TMS352	14.Aug.2018	10:21:47	215,00	bar	22,35	*C	1	Single	1	-
	Accum-H46-987 00010		14.Aug.2018	10:23:15	220,00	bar	22,35	°C		Single	1	-
wnload Measurements	Accum-H46-987 00010		14.Aug.2018	10:23:51	240,00	bar	22,44	*C	6	Single	1	-
Save Filtered	Accum-H46-987 00010	Arbug TMS352	14.Aug.2018	10:23:51	245,00	bar	22,44	°C	7	Single	1	12
Savermered	Accum-H46-987 00010	C Arbug TMS352	14.Aug.2018	10:23:51	240,00	bar	22,44	*C	8	Single	1	-
Save All	Accum-H46-987 00010	C Arbug TMS352	14.Aug.2018	10:23:51	235,00	bar	22,44	°C	9	Single	1	-
Open Measurements	Accum-H46-987 00010	C Arbug TMS352	14.Aug.2018	10:23:52	230,00	bar	22,44	*C	10	Single	1	-
open measurements	Accum-H46-987 00010	C Arbug TMS352	14.Aug.2018	10:23:52	225,00	bar	22,44	°C	11	Single	1	-
Add Measurements	Accum-H46-987 00010	C Arbug TMS352	14.Aug.2018	10:23:52	220,00	bar	22,44	*C	12	Single	1	-
Current da Currel	Accum-H46-987 00010		14.Aug.2018	10:23:52	215,00	bar	22,44	°C	13	Single	1	-
Export to Excel	Accum-H46-987 00010	C Arbug TMS352	14.Aug.2018	10:23:53	210,00	bar	22,44	*C	14	Single	1	
Create Report	Accum-H46-987 00010	C Arbug TMS352	14.Aug.2018	10:23:53	205,00	bar	22,44	°C	15	Single	1	1
	Accum-H46-987 00010	C Arbug TMS352	14.Aug.2018	10:23:53	200,00	bar	22,44	*C	16	Single	1	-
leader Setup:												•
and beings.	250-											
Culture Data and DCL												
Switch Bar<->PSI	t 240-											-
Switch Bar<->PSI	ty 240- a 230-											
Set Time	10 240- 230- 220-			-							-	
	tj 240- 230- 220- 210-							_			-	_
Set Time	aunssau 220- 210-					/		-				_
Set Time Erase Memory	t) 240- 230- 220- 210- 220- 210- 220-					/	~	~	_		_	
Set Time Erase Memory	220- 220- 210- 2205-			_		/	\checkmark	_	_		_	
Set Time Erase Memory	220- 220- 210- 2205-			<u> </u>		/	\checkmark	~			~	
Set Time Erase Memory Sensor Naming	220- 220- 210- 2205-			_		/	~	_	_	_		
Set Time Erase Memory Sensor Naming Exit	220- 220- 210- 2205- 205-			_		/	<u> </u>	_		_		
Set Time Erase Memory Sensor Naming	220- 220- 210- 2205-					/						

Evaluation of the measured values recorded by the reader and direct comparison with previous measurement data.

ensor Nam	e						
	Please enter serial num	ber and designatio	n				
Open Sensor list	Sensor Serial Numbe	Name	Machine	Desired Pre	Tolerance ·	Tolerance -%	Max. System Pres
Save Sensor list	00010C	Accum-H46-987	Arbug TMS352	225,0	5	5	250
Sure Sensor hat	00010A	Accum-H46-986	Arbug TMS352	190	5	5	200
	00010B	Accum-H46-985	Arbug TMS352	50	5	5	60
Add and Apply							
Back							

Serial numbers of the sensors can be clearly assigned to a measuring point or machine. New measurement data is assigned the correct name immediately after downloading.



Adaptor Type SBAA-P-FV

Application of the Wireless Pressure Measurement System PT-RF



Adaptor Type SBAA-FV




Customer-specific reports can be created quickly and easily from the measurement data.





Accumulator Adaptor - Type SBAA / SDAA



В







Product Description

ensuring correct operation.

Membrane and bladder accumulators are important

components of modern hydraulic systems. Monitoring the nitrogen pressure level is becoming ever more important for

The STAUFF Accumulator Adaptor together with the PT-RF

pressure sensors allow maintenance personal to quickly and easily check the accumulator pressure without pressure

loss. Pressure values, serial numbers, date and time will


easily and conveniently read out on the PC later on.

For this, the Accumulator Adaptor is screwed onto the

nitrogene connection of the accumulator and a PT-RF

automatically be stored in the memory of the reader and then

Order Codes

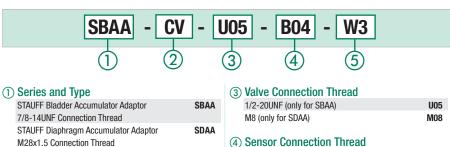

CV

FV

(2) Adaptor Type (only for SBAA)

for accumulators with changeable valve (only for SBAA) for accumulators with fixed valve (only for SBAA)

(4) Sensor Connection Thread
G1/4 Connection Thread
(5) Material Code
0
Steel, zinc/nickel-plated

B04

W3

Technical Data


max. Pressure: 400 bar / 5801 PSI

Burst Pressure: 1600 bar / 23206 PSI

pressure sensor is attached at the side.

- Sealing Material:
- NBR (Buna-N®)

Set Up

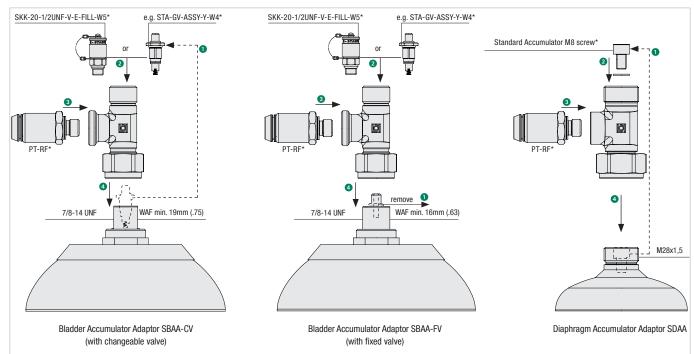


*not included.


www.stauff.com/8/en/#58

Accumulator Adaptor Type SBAA-P


connection without draining the nitrogen accumulator



Order Codes

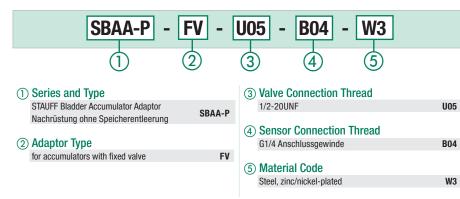

Set Up

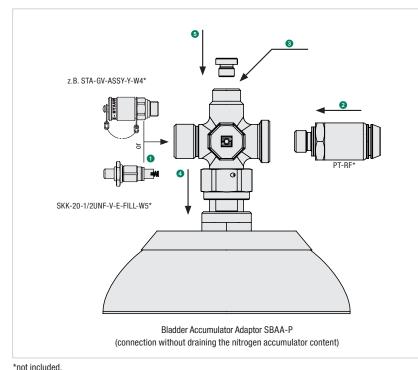



Product Description

W3

- nitrogen pressure on hydraulic accumulators quickly and easily
- Contactless digital measurement, recording and
- documentation, no screwing, no connecting Maintenance-free, no battery and handy, lightweight reader
- Easy retrofitting, without pressure loss and without great effort

Membrane and bladder accumulators are important components of modern hydraulic systems. Monitoring the nitrogen pressure level is becoming ever more important for ensuring correct operation.

The STAUFF Accumulator Adaptor together with the PT-RF pressure sensors allow maintenance personal to quickly and easily check the accumulator pressure without pressure loss. Pressure values, serial numbers, date and time will automatically be stored in the memory of the reader and then easily and conveniently read out on the PC later on.

For this, the Accumulator Adaptor is screwed onto the nitrogene connection of the accumulator and a PT-RF pressure sensor is attached at the side.

The SBAA-P adaptor for hydraulic bladder accumulators represents a consistent further development in accumulator adaptation.

It enables monitoring of the nitrogen filling without having to empty the accumulator during installation, as is necessary with the simple SBAA.

The SBAA-P is screwed directly onto the existing accumulator valve with sensor* and additional valve*. The valve opening tappet opens the accumulator valve of the hydraulic accumulator by means of an Allen key.

A blanking plug serves to additionally seal and secure the adaptor. Retrofitting with this accumulator adaptor is possible within a few minutes without emptying the accumulator and the accumulator pressure can be read out immediately using the PT-RF sensor.

Technical Data

- max. Pressure:
- Burst Pressure:
- Sealing Material:

400 bar / 5801 PSI 1600 bar / 23206 PSI NBR (Buna-N®)

B



*not included.

The SDAA is designed for use with diaphragm accumulators.

To use the adaptor, the M8 screw in the accumulator has to be removed with the sealing ring and re-inserted into the upper connection of the adaptor. The adaptor is supplied with a replacement seal (BD-Ring-U02-W32-B), so worn or defective seals can be replaced. The conventional filling set is used for refilling.

SBAA-CV

B

SDAA

The SBAA-CV is designed for use with bladder accumulators with changeable valves. The spanner area (WAF) on the accumulator connection **cannot be smaller than 19 mm/.75 in**.

To use the adaptor, the original valve must be unscrewed from the accumulator connection, and – if it fits (external thread 1/2-20UNF) – inserted into the upper connection of the adaptor again. The conventional filling set is used for refilling. If the original valve does not have a matching thread, either a default gas valve (e.g. STA-GV-ASSY-Y-W4) or a test connection SKK-FILL (SKK-20-1/2UNF-V-E-FILL-W5) can be used, which are offered by STAUFF as accessories.

SBAA-FV and SBAA-P-FV

The SBAA-FV is designed for use with bladder accumulators with a fixed valve head (7.5 mm / 0.29 in). The spanner width (WAF) on the accumulator connection **cannot be smaller than 16 mm/.63 in.**

For use the SBAA-FV, the valve insert must be removed from the valve head to allow filling through the adaptor. A new valve with an external thread 1/2-20UNF must then be inserted into the upper connection of the adaptor. STAUFF offers a matching default gas valve (e.g. STA-GV-ASSY-U-W3) or a test connection SKK-FILL (SKK-20-1/2UNF-V-E-FILL-W5). With the SBAA-P-FV the original valve does not have to be removed and remains in the accumulator.

Accessories / Spare Parts

Order Codes




Sealing for SDAA Gas Valve (Type 8V1 - ISO 4570) Test connection SKK


BD-Ring-U02-W32-B STA-GV-ASSY-Y-W4 SKK-20-1/2UNF-V-E-FILL-W5

Application




Adaptor Type SBAA-CV and SBAA-FV



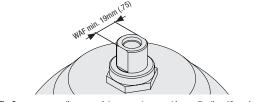

!The Spanner area on the accumulator connector cannot be smaller than 19mm / .75in!



!The Spanner area on the accumulator connector cannot be smaller than 16mm / .63in!




Adaptor Type SBAA-P-FV






B

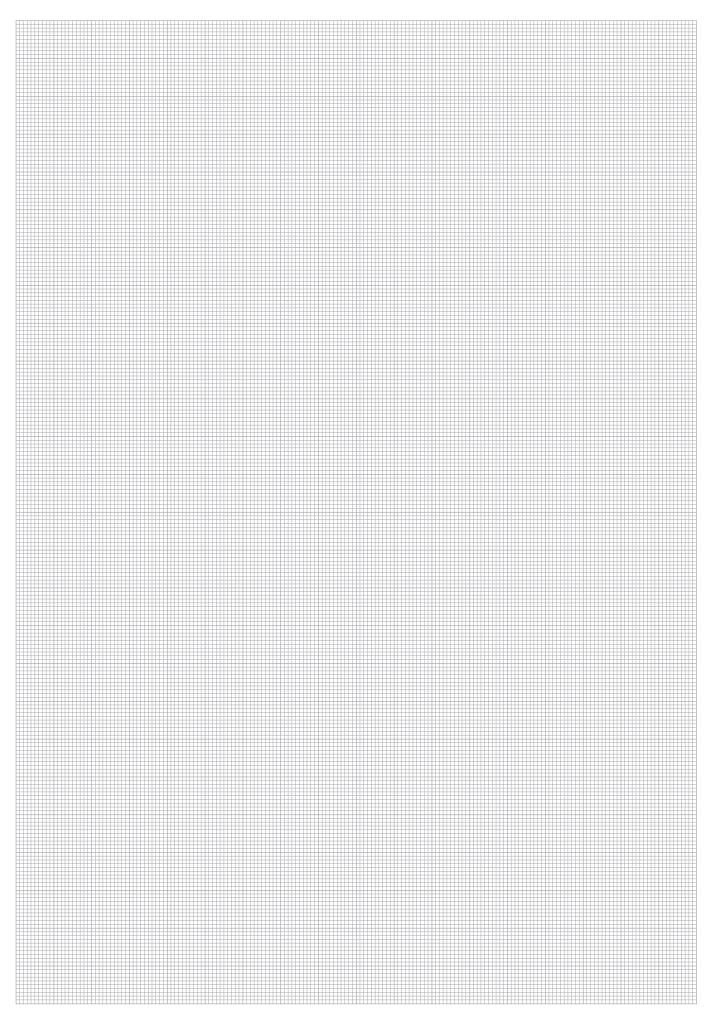

Flow Indicator - Types SDM / SDMKR



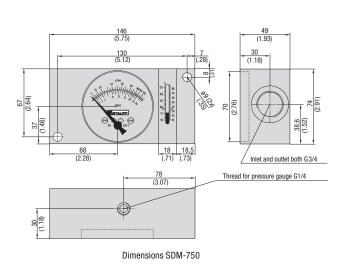

016

 $(\mathbf{4})$

See table on page 63

(4) Flow Ranges

(5) Thermometer

Т

Α

3

Α

В

B

Product Description

Analogue flow indicators for measuring the flow rate of fluids in mobile and industrial hydraulics.

The SDMKR is designed with a loading valve for the strain test of the hydraulic system to facilitate precise control of the operating pressure. In addition, this product can also be subjected to a reverse flow direction (without flow rate determination).

Features

- Suitable for Mineral Oil (Aluminium), HFC Fluids and Water (Brass)
- Designed for in-line installation
- Mechanical flow measurement
- Controlling working pressure with a pressure control valve (only SDMKR)
- Flow indication in I/min and GPM for Aluminium units, Brass units have flow indication for Water and Oil both in I/min
- Aluminium unit: Dual scale
- Brass unit: Single scale
- Thread to connect with pressure gauge (only SDM)

Technical Data

Accuracy


(at a kinematic viscosity of 28cSt):

■ Flow: ±4 % FSD

- Temperature: ±2,5 °C / ±5 °F
- Pressure (only SDMKR): ±1.6 % FS*
- Temp. measuring range: +20 °C ... +110 °C /
- +55 °F ... +245 °F • Media temperature permanent: +80 °C / +176 °F
 - temporary (<10 min.): +110 °C / +245 °F


Note: Other thread versions available on request.

Order Codes



(3) Housing Material Aluminium Brass (only SDM)

Functional Principal Flow Measuring



The flow indicators SDM and SDMKR have a sharp-edged orifice and a tapered metering piston, which moves in proportion to changes of flow against a spring. In no flow condition the piston closes the opening and the pointer indicates zero.

With increasing flow and differential pressure the piston moves against the calibrated spring. The piston movement is directly proportional to the flow rate and is magnetically coupled to the rotary pointer. During this function the sharp-edged orifice minimises the effects of viscosity. The flow is shown on a calibrated scale in I/min and gal/min.

Controlling Working Pressure with SDMKR

With integrated thermometer (standard option)

Τ.

The pressure control valve of the SDMKR is directly connected to a flow-block and together with the integrated pressure gauge it allows an exact control of the working pressure in the maximum range.

For protection the SDMKR has two rupture disks. At a pressure >420 bar the disks burst and the fluid is by-passed around the valve. The rupture disks (other pressure ranges on request) can be replaced easily.

The SDMKR also permits flow in the reverse direction (without flow rate determination).

SW41 (Hex41)

View shown without cover

420 bar / 6091 PSI

₽⊢

Flow Indicators Types SDM / SDMKR

ਸ਼

С

E

329 (12.95)

A

Dimensions SDMKR-750

-@

STAUFF

124,5


(1.87) (1.87)

П

SW41 (Hex41)

 \square

53 (2.09)

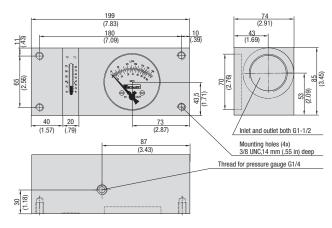


Dimensions SDM-1500


Technical Data


Max. Working Pressure (^{bar} / _{PSI})	Flow Range (^{I/min} / _{US GPM}) Aluminum Units	Flow Range Brass Units (only SDM) *	Weight (^{kg} / _{lbs})	Connection T	Order Codes
420	2 - 16	-	1,36	G3/4	CDM 750 A 010 T
6091	0.5 - 4	-	3.0	63/4	SDM-750-A-016-T
420	2 - 30	-	1,36	G3/4	SDM-750-A-030-T
6091	0.5 - 8	-	3.0	63/4	SDIVI-750-A-030-1
420	2 - 60	-	1,36	00/4	CDM 750 A 000 T
6091	0.5 - 16	-	3.0	G3/4	SDM-750-A-060-T
420	4 - 120	-	1,36	00/4	00M 750 A 400 T
6091	1 - 32	-	3.0	G3/4	SDM-750-A-120-T
420	10 - 180	-	1,36	00/4	00M 750 A 400 T
6091	4 - 48	-	3.0	G3/4	SDM-750-A-180-T
420	-	2 - 30 I/min in oil	3,80	00/4	00M 750 D 000 T
6091	-	2 - 30 I/min in water	8.40	G3/4	SDM-750-B-030-T
420	-	3 - 60 l/min in oil	3,80	00/4	
6091	-	3 - 70 l/min in water	8.40	G3/4	SDM-750-B-060-T
420	-	4 - 120 I/min in oil	3,80		
6091	-	4 - 140 l/min in water	8.40	G3/4	SDM-750-B-120-T
350	10 - 200	-	3,0		
5075	5 - 50	-	6.61	G1-1/2	SDM-1500-A-200-T
350	20 - 300	-	3,0		
5075	4 - 80	-	6.61	G1-1/2	SDM-1500-A-300-T
350	20 - 400	-	3,0		
5075	5 - 100	-	6.61	G1-1/2	SDM-1500-A-400-T
350	-	10 - 200 l/min in oil	8,0		
5075	-	10 - 200 l/min in water	17.64	G1-1/2	SDM-1500-B-200-T
350	-	20 - 400 l/min in oil	8,0		
5075	-	20 - 400 l/min in water	17.64	G1-1/2	SDM-1500-B-400-T
420	2 - 30	-	6,6		
6091	0.5 - 8	-	14.55	G3/4	SDMKR-750-A-030-T
420	5 - 60	-	6,6		
6091	1.3 - 16	-	14.55	G3/4	SDMKR-750-A-060-T
420	5 - 120	-	6,6		
6091	1.3 - 32	-	14.55	G1	SDMKR-750-A-120-T
420	10 - 200	-	6,6		
6091	4 - 53	-	14.55	G1	SDMKR-750-A-200-T


Flow Curves - Aluminium Version (Oil)










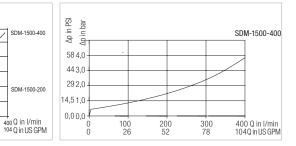

Flow Curves - Brass Version (Water)



 * The Brass units have a scale for water and oil $\,$ – in l/min. Dimensional drawings: All dimensions in mm (in).



Ap in PSI Ap in bar

43.5

36.3 2.5

29 2

21.8 1.5

14.5

7.250.5

0.0 0.0

0 0
 50
 100
 150
 200
 250

 13
 26
 39 52
 66

350 92.5

300 78





	Introduction	66
	Testing standards and oil purity	67
	Overview of particle counters	68
	Particle counting in general	69
	PC-Software	
	STAUFF Contamination Analyze	69
	Particle Counters	70 - 77
-	Professional	70
ST.P.	LasPaC-3-P	
	Mobile	74
	LasPaC-II-M	
A A A A A A A A A A A A A A A A A A A	Bottle Sampler Unit	76
CHA	Bottle-Sampler-LasPaC	
	Moisture/ Temperature Sensor	77
	Accessories	77
	Particle Monitor	78 - 81
	LPM-II-plus	78
R	Interface-LPM-II-USB/ETH	79
	DISPLAY-LPM-II-plus-REMOTE	79
12	Flow Control Valve	80
HI.	DAV-LPM-II	
	ATEX Device	81
H	LPM-IICX	
	Oil Sampling	82
	Oil Sampling Kit	82
	KIT-SFS-1/-2	

C

Introduction Particle Counting



Fluid analysis is a crucial element in any oil management programme. Early detection of potential faults avoids costly repairs and breakdowns.

STAUFF offers a world-leading range of the most advanced and versatile particle counters for every conceivable application. Whether in stationary systems or as a portable solution for mobile machines, they can be customised precisely to the application thanks to their wide range of options.

The various device types offer very fast, comprehensive and very accurate particle analysis for different applications.


Due to their design, the particle counters are extremely robust and adapted to the adverse conditions in the hydraulic environment.

Particle counting provides measurement results in accordance with all current international standards (ISO, NAS and SAE) and includes further analyses such as moisture, temperature and pressure measurement.

Real-time monitoring and proactive maintenance protects the machines, increases performance and productivity and reduces costs and unplanned downtime.



Testing standards and oil purity

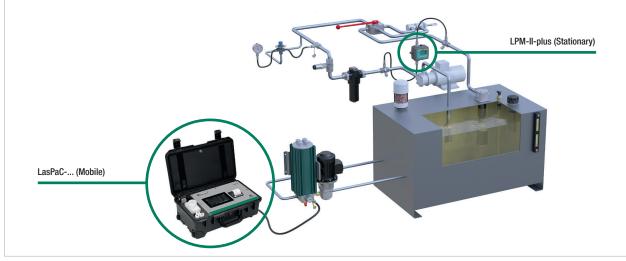

Application examples of particle counters in the hydraulic circuit

Testing standards and oil purity

In order to guarantee reliable operation for years to come, certain components must comply with a specified oil cleanliness class.

The required oil cleanliness class is determined by the most sensitive system component.

Particle counters are used, for example, to measure oil purity in accordance with ISO 4406. The particle counters are used to count the number of particles >4 μ m (c), >6 μ m (c) and >14 μ m (c) in 100 ml of hydraulic oil. The number of particles is then assigned to a classification number (e.g. 14/11/8), which then corresponds to the ISO cleanliness class.

This classification is carried out automatically in the particle counter and evaluated according to the standards below, among others.

When interpreting these classes, it should be noted that the number of particles is doubled for each next higher class.

The STAUFF particle counters are calibrated with ISO test dust (ISO Medium Test Dust / ISO MTD) in accordance with ISO 11 171.

Cleanliness classes according to ISO 4406

	f particels)0 ml	Cla	assification numbe ISO 4406	ers
More than	Less than	> 4 µm _(c)	> 6 µm _(c)	$> 14 \ \mu m_{(c)}$
16000000	32000000	25	25	25
8000000	16000000	24	24	24
4000000	8000000	23	23	23
2000000	4000000	22	22	22
1000000	2000000	21	21	21
500000	1000000	20	20	20
250000	500000	19	19	19
130000	250000	18	18	18
64000	130000	17	17	17
32000	64000	16	16	16
16000	32000	15	15	15
8000	16000	14	14	14
4000	8000	13	13	13
2000	4000	12	12	12
1000	2000	11	11	11
500	1000	10	10	10
250	500	9	9	9
130	250	8	8	8
64	130	7	7	7
32	64	6	6	6
16	32	5	5	5

Cleanliness classes according to NAS 1638

Class	Number of particels 100 ml [µm]								
	5 –15	15 – 25	25 – 50	50 –100	>100				
00	125	22	4	1	0				
0	250	44	8	2	1				
1	500	89	16	3	1				
2	1000	178	32	6	1				
3	2000	356	63	11	2				
4	4000	712	126	22	4				
5	8000	1425	253	45	8				
6	16000	2850	508	90	16				
7	32000	5700	1012	180	32				
8	64000	11400	2052	360	64				
9	128000	22800	4050	720	128				
10	256000	45600	8100	1140	256				
11	512000	91200	16200	2880	512				
12	1024000	182000	32400	5760	1024				

The methods for determining oil purity and the assignment of cleanliness classes are defined in ISO 4406 and NAS 1638. The main difference between these two standards is that ISO and NAS define the size of the particles differently.



Overview of particle counters

LasPac-3 in mobile application

Mobile

Stationary





LPM-II-plus in stationary application

Version/Design	Мо	bile	Stationary		
Туре	LasPaC-3-P	LasPaC-II-M	LPM-II-plus		
Measuring range	8 Channels (4,6,14,21,25,38,50,70 µm(c))	8 Channels (4,6,14,21,25,38,50,70 µm(c))	8 Channels (4,6,14,21,25,38,50,70 µm(c))		
Compatible with	Fluids based on mineral oil and petroleum, Specific water glycols, bio-oils or phosphate esters	Fluids based on mineral oil and petroleum, Specific water glycols, bio-oils or phosphate esters	Fluids based on mineral oil and petroleum, Specific water glycols, bio-oils or phosphate esters		
Moisture Sensor	optional	optional	optional		
Viscosity range	1 400 cSt	1 400 cSt	1 1000 cSt		
Pressure range (bar) Measuring point pressure sensor	2 420 bar / 29 6091 PSI optional	2 420 bar / 29 6091 PSI -	2 420 bar / 29 6091 PSI -		
Display	7" Touchscreen	LCD display	LCD display		
Printer	integrated	-	-		
Data storage	integrated (for about 4000 measurements)	integrated (for about 600 measurements)	integrated (for about 4000 measurements)		
PC-Interface Direct connection of	USB-C	RS-232 (USB converter incl.)	USB (via USB interface)		
USB stick	integrated	-	optional		
SPS / PLC connection	-	-	RS485, RS232, Modbus, CAN Bus		
Analogue output	-	-	4 - 20 mA (See data sheet for details)		
Power supply	Battery pack integrated Li-lon or 110/220V	Battery pack integrated NiMH or 110/220 V	9 - 36VDC or 110V/230V optional		
Page	70	74	78		



Analyses anywhere - bottle sampling unit

If it is not possible to count particles directly on your system, you can use the oil sampling kit (page 82) to take oil samples for later analysis with the LasPaC bottle sampler.

Please see page 76




Particle counting in general

Operating principle

All STAUFF particle counters work according to the lightblockade principle, in which LEDs shine through the liquid to be measured and illuminate a photodiode.

When a particle in the oil passes the light beam, the amount of light that hits the photodiode decreases. As this change is directly proportional to the size of the particle, the degree of contamination can be determined from this.



For all applications - High compatibility

Depending on the model, STAUFF particle counters are compatible with mineral oils and petroleum-based fluids, phosphate esters (e.g. Skydrol®) or specific water glycols and specific bio-oils.

For every type of application - Large pressure range

A major advantage of STAUFF particle counters is the wide application pressure range from 2 bar / 29 PSI to 420 bar / 6091 PSI. This leads to reliable measurement results without the need for additional devices.

Moisture / Temperature Sensor

The STAUFF particle counters can also be equipped with a moisture / temperature sensor.

This sensor measures the water content of the measured fluid (results in relative humidity, RH%) and also indicates the current fluid temperature (in °C). Further information can be found on page 77.

Please note that the moisture / temperature sensor cannot be used with phosphate esters (e.g. Skydrol®), water-glycol fluids and bio-oils.

Calibration according to ISO 11 171

The STAUFF particle counters are calibrated with IS0 test dust (IS0 Medium Test Dust / IS0 MTD) in accordance with IS0 11 171.

The cleanliness classes are analysed according to the various standards used. These include ISO 4406, NAS 1638, AS 4059 / ISO 11218 Rev E and F, GBT 14039 and GJB 420B.

Bottle Sampling Unit

Fluids that are heavily mixed with air cannot be measured correctly. To remedy this, the bottle sampling unit has a vacuum pump that removes air from the oil sample. The bottle sampling unit is supplied in both sizes (110 ml and 500 ml) with an external power supply. For further information please see page 76.


Please note that the moisture / temperature sensor mentioned above cannot be operated in conjunction with the bottle sampling unit.

PC software for LasPaC and LPM STAUFF Contamination Analyze

Using the software supplied, the measurement data stored on the devices can be visualised and evaluated. The software works on a database basis, which makes it easy for the user to obtain an overview of the cleanliness classes of their machines and systems. Trends and threshold values can be read off simply and easily.

By creating report templates, reports for customers or your own documents can be created very easy. It is possible to store logos and addresses. This allows the report to be optimised for your own service.

All particle counters or monitors supplied by STAUFF can be read out with the same software, so that even a comparison of different measuring devices is possible.

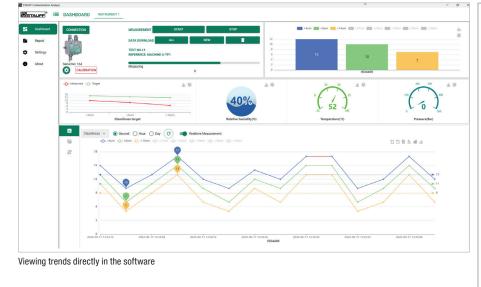

 Name
 Lago

 27.13.0024

 Pressure Test Report

 Accoum-H46-097-00010C-14Aug2018-102351

 Conducted by:

 Customer:

 Customer:

 Customer:

 Customer:

 Customer:

 Customer:

 Customer:

 System/Machine:

 System/Machine:

 Customer:

 Customer:

 Customer:

 System/Machine:

 System/Machine:

 Customer:

 Customer:

 Customer:

 System/Machine:

 Customer:

 System/Machine:

 Customer:

 System/Machine:

 Customer:

 System/Machine:

 Customer:

 System/Machine:

 Customer:

 System/Machine:

 Customer:

 System:

 Pressor

 Date of issue

 Conducted by:

 211.2024

Create customised reports

Measurement data view in table form

69



Particle Counter Type LasPaC-3-P (Professional)



Robust design (co-polymer housing)

Product Description

Features

Works fast

The LasPaC-3 sets new standards in particle measurement. The third generation mobile laboratory simply on site. Fast, precise, robust and reliable.

Fast generation of measurement results due to free

programmable test volume (100 ml in one minute)

ISO 4406, NAS 1638, AS 4059 / ISO 11218 Rev E and F,

Additional oil moisture measurement incl. temperature

According to international standards

GBT 14039 and GJB 420B



Modern 7" touchscreen and thermal printer

Connect to the working system

Pressure range from 2 to 420 bar.

Mobile and robust

0

STAUFF

Optional, integrated measuring point pressure sensor

Robust construction (co-polymer housing) with still lowest

weight, mobile due to integrated trolley function. All necessary connections, hoses and waste oil bottle integrated in the case.



Mobile due to integrated trolley function

Order Codes

LasP	aC-3	- P -	M ·	- 0 -	- P
Ċ	D	2	3	4	5

1	Series and Type	
	Particle Counter	

LasPaC-3	
----------	--

2 Version Professional

③ Fluid Compatibility	
Mineral Oil, Petroleum based fluids	М
Phosphate Ester (e.g. Skydrol®)	E
Specific Water Glycol fluids and bio-oils	G

Note: If you have any queries on fluid compatibility, please contact STAUFF.

(4) Moisture/ Temperature Sensor

Without moisture/ temperature sensor	0
With moisture/ temperature sensor	W

Please note: Not suitable for Phosphate Ester (e.g. Skydrol®), Glycol fluids and bio-oils.

(5) Measuring point pressure sensor

Without Measuring point pressure sensor	0	
With Measuring point pressure sensor	Р	

Long battery life

Long-life Li-lon battery enables self-sufficient operation directly at the measuring point. Easy battery removal for air freight transportation possible.

Integrated self-cleaning

Automatic program for sensor cleaning

Waste oil bottle

0

0

LasPaC-3


The sample oil can be collected in the integrated waste oil bottle and disposed later.

Simple operation

Via 7" touchscreen with intuitive menu navigation

Direct documentation

Printout of the results including particle counts directly using the integrated printer or permanently due to internal storage for measurement result

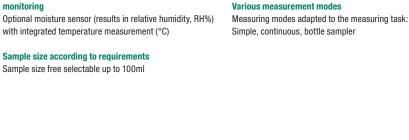






Connections

Particle Counter - Type LasPaC-3-P (Professional)









Integrated Organizer

Extensive analysis functions


×


?

₽

俞

The measurement data can be analyzed and evaluated on the screen (RED/YELLOW/GREEN/BLUE) or transferred to the PC software for further processing via USB-C.

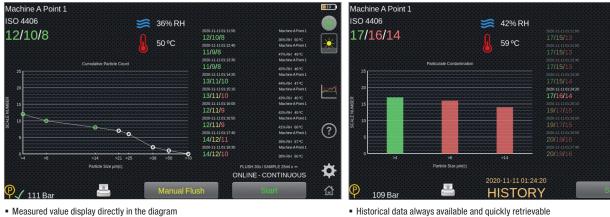



	ISO 4		ion Lin	iits						n
									₩	
μm(c):	>4	>6	>14	>21	>25	>38	>50	>70	RH%	
	20	18	16							
_ower	17	15	14							

SETTINGS	CALIBRA	ATION DU	E 2024-	FIRMWARE 3.91 SERIAL NUMBER 999999999 05-31 : 1297 DAYS REMAINING	3110
Reference	Machine A Poin	t 1			
Result Format	ISO 4406				
Test Type	ONLINE - CON	TINUOUS			
30s	Flush		S	Water Content (RH)	<u> </u>
25ml	Sample		Θ	2020-11-11 1:24:53 UTC	
0m	Wait		*	Diagnostics	?
∞	Repeat		EN	¥ II— ■ Language	
Stop When Clean			\checkmark	Simulation	*
				<u> </u>	鼠

- Definition of limit values, directly in the device

- Visual coloring when measured values are exceeded

· Simple setting of measurement tasks

www.stauff.com/8/en/#71

Particle Counter - Type LasPaC-3-P (Professional)





551 x 358 x 226 mm /

7" touchscreen

Thermal printer

Technical Data

C

Dimensions and Weight

L/W/H:Weight:

21.69 x 14.09 x 8.90 in 15,5 kg / 34.17 lbs

- Display / Printer
- Display:
- Printer:

Power Supply

- Voltage range: 110 ... 240 V AC
- European, UK and US power plug adaptors included
- Number of tests before recharging is required: 100
- Removable Li-Ion battery pack

Calibration

ISO Medium Test Dust (MTD) according to ISO 11 171

Analysis range

- ISO 4406 Codes 0-24
- NAS 1638 Classes 00-12
- AS 4059 / ISO 11218 Rev E, Table 1 Codes 00-12
- AS 4059 / ISO 11218 Rev E, Table 2 Codes A-F: 000-12
- AS 4059 Rev F, Table 1 Codes 000-12
- AS 4059 Rev F, Table 2 Codes cps 000-12
- GBT 14039 Codes 0-24
- GJB 420B Codes, A-F: 000-12

Accuracy

 \pm 1/2 class for:

ISO 4406 and GBT 14039 Codes 8-24 and for Codes 4, 6, 14 $\mu m(c),$

NAS 1638 and AS 4059 / ISO 11218 Rev E and F,

Table 1 Size Codes Class 2-12,

AS4059 / ISO 11218 Rev E and F Table 2 and GJB 420B Size • Out: classes, A: 000-12, B: 00-12, C: 00-12, D: 2-12, E: 4-12, F: 7-12

 \pm 1 class for larger sizes and lower size codes as mentioned above

Pressure / Viscosity

Pressure range:

29 ... 6
 Viscosity range: 1 ... 40

2 ... 420 bar / 29 ... 6091 PSI 1 ... 400 cSt

LED Sensor

- High accuracy laser LED:Automatic optical particle counter with high-precision LED light blockage
- Measured channels: 4, 6, 14, 21, 25, 38, 50, 70 μm_(c)
- The maximum concentration is ISO 4406 Code 24
- (160.000 p/ml)
- Sample quantity: Maximum 100 ml per pump stroke
 Programmable test volume

Moisture Sensor (optional)

- % RH (relative humidity) ±3 %
- ±3 °C / ±32 °F

Measuring point pressure sensor (optional)

• \pm 0.5% full scale accuracy (min. 10 bar)

Accessories

- Bottle Sampling Unit 110 ml
- Bottle Sampling Unit 500 ml
- For further information please see on page 76.
- Screen filter: 500 μm (see on page 77)

Hose Connections • In:

. .

Test points STAUFF Test 20 or similar (M16 x 2) 1.5 m hose included in the scope of delivery Quick-release coupling (unpressurised) 2 m hose included in the scope of delivery

Permissible Temperature

Media temperature: +5 °C ... +80 °C / +41 °F ...+176 °F
 Ambient temperature: -10 °C ...+80 °C / +14 °F...176 °F

Data output

- 2 x USB output:
- 1 x USB-C for connection to PC 1 x USB-A for data download to USB memory stick

Data Storage

for 4000 tests

Fluid Compatibilit

- Mineral Oil, Petroleum based fluids
- Specific water glycols, bio-oils or phosphate esters

Protection class

- IP 66 (closed cover)
- IP 54 (open cover)

Software


 Downloading and storage of data using the 'STAUFF Contamination Analyze' software supplied. Further processing with Microsoft Excel® possible.

www.stauff.com/8/en/#72







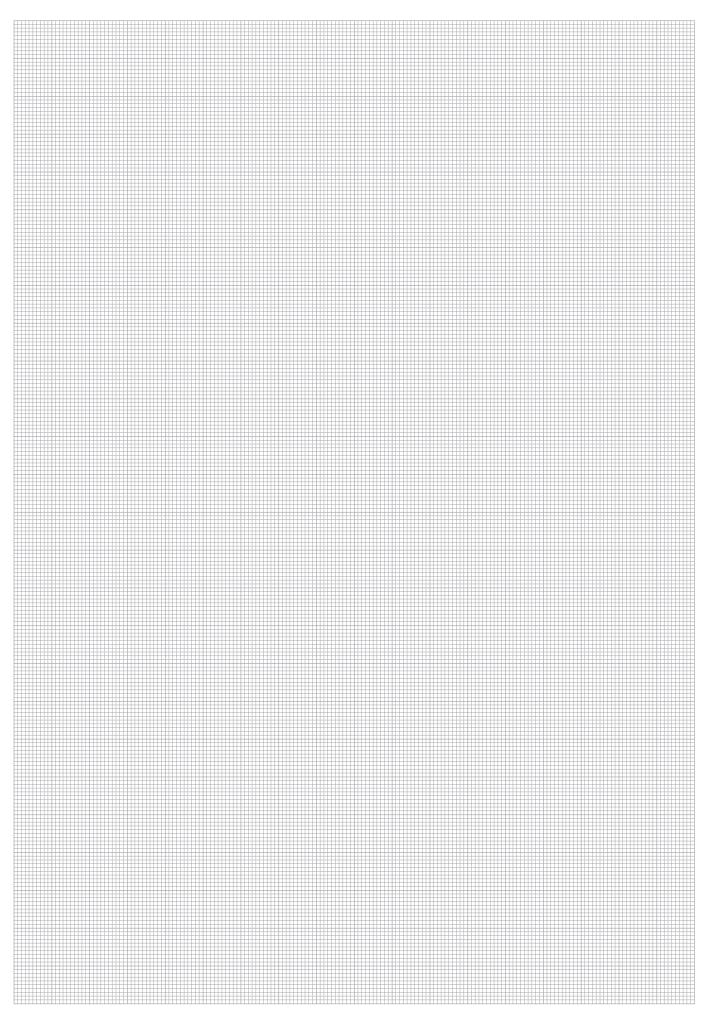



Particle Counter - Type LasPaC-II-M (Mobile)



LasPaC-II-M with integrated battery (standard option)


Product Description

The LasPaC-II-M (mobile) is a simplified particle counter that has been specially designed for applications where it is important to have a lightweight and robust service device.



LasPaC-II-M also available without integrated battery

Order Codes



LasPaC-II

1 Series and Type Particle Counter

	Version	
(2)	Version	
	Mobile	Μ
3	Fluid Compatibility	
	Mineral Oil, Petroleum based fluids	Μ
	Phosphate Ester (e.g. Skydrol®)	Ε
	Specific Water Glycol fluids and bio-oils	G
4	Note: If you have any queries on fluid compatibility, please contact STAUFF. Moisture/ Temperature Sensor	
	Without moisture/ temperature sensor	0
	With moisture/ temperature sensor	W
	Please note: Not suitable for Phosphate Ester (e.g. Skydrol®), Glycol fluids and bio-oils.	

(5) Battery

9	Dattery	
	With internal rechargeable battery	В
	Without internal rechargeable battery	0

According to international standards

ISO 4406, NAS 1638, AS 4059 / ISO 11218 Rev E and F, GBT 14039 and GJB 420B $\,$

Additional oil moisture measurement incl. temperature monitoring

Optional moisture sensor (results in relative humidity, RH%) with integrated temperature measurement (°C)

Simple operation

Intuitive three-button operation (start, stop, flush)

Display

LCD-Screen for ISO / NAS-Class

Documentation

Data Storage for 600 tests. Downloading and storage of data using the 'STAUFF Contamination Analyze' software supplied. Further processing with Microsoft Excel® possible.

Connect to the working system

Pressure range from 2 to 420 bar

Mobile and robust

Robust construction (co-polymer housing) with still lowest weight. All necessary connections, hoses and waste oil bottle integrated in scope of delivery.

Various measurement modes

Measurement modes adapted to the measuring task can be selected using the "STAUFF Contamination Analyze" software



Particle Counter - Type LasPaC-II-M (Mobile)



LasPaC-II-M with small Bottle Sampler

Technical Data

Dimensions and Weight

 L/W/H: 340 x 295 x 152 mm / 13.40 x 11.61 x 5.98 in
 Weight: 4,75 kg / 10.47 lbs

Power Supply

- Voltage range:
- 12 ... 24 V DC

110 ... 240 V AC

European, UK and US power plug adaptors included
Number of tests before recharging is required: 60

Calibration

ISO Medium Test Dust (MTD) according to ISO 11 171

Analysis range

- ISO 4406 Codes 0-24
- NAS 1638 Classes 00-12
- AS 4059 / ISO 11218 Rev E, Table 1 Codes 00-12
- AS 4059 / ISO 11218 Rev E, Table 2 Codes A-F: 000-12
- AS 4059 Rev F, Table 1 Codes 000-12
- AS 4059 Rev F, Table 2 Codes cps 000-12
 GBT 14039 Codes 0-24
- GJB 420B Codes, A-F: 000-12

Accuracy

± 1/2 class for:

- ISO 4406 and GBT 14039 Codes 8-24 and for Codes 4, 6, 14 $\mu m(c),$
- NAS 1638 and AS 4059 / ISO 11218 Rev E and F,
- Table 1 Size Codes Class 2-12,

AS4059 / ISO 11218 Rev E and F Table 2 and GJB 420B Size classes, A: 000-12, B: 00-12, C: 00-12, D: 2-12, E: 4-12, F: 7-12

= \pm 1 class for larger sizes and lower size codes as mentioned above

Pressure / Viscosity

- Pressure range:Viscosity range:
- 2 ... 400 bar / 29 ... 5801 PSI 1 ... 400 cSt

Laser Sensors

- High accuracy laser: 4 ... 6 $\mu m_{\scriptscriptstyle (\!C\!)}$
- Standard accuracy laser:6 ... 70 $\mu m_{\scriptscriptstyle (\!C\!)}$
- Measured channels: 4, 6, 14, 21, 25, 38, 50, 70 $\mu m_{\rm (c)}$
- The maximum concentration is ISO 4406 Code 24 (160.000 p/ml)

Accessories

- Bottle Sampling Unit 110 ml
- Bottle Sampling Unit 500 ml
- For further information please see on page 76.
 Screen filter: 500 μm (see on page 77)

Hose Connections • In:

Sample Volume

15 ml (normal)

30 ml (dynamic)

24 ml (bottle sampler)

15 ml (continuous)

8 ml (short)

Out·

Test points STAUFF Test 20 or similar (M16 x 2) 1.5 m hose included in the scope of delivery Quick-release coupling (unpressurised) 2 m hose included in the scope of delivery)



Display and Buttons

Permissible Temperature

• Operating: +5 °C ... +80 °C / +41 °F ...+176 °F

Data Storage

600 tests

Fluid Compatibilit

- Mineral Oil, Petroleum based fluids
- Specific water glycols, bio-oils or phosphate esters

Computer Interface

- RS-232 communication port as standard
- USB adaptors included

Software

 Downloading and storage of data using the 'STAUFF Contamination Analyze' software supplied. Further processing with Microsoft Excel® possible.

Internal Rechargeable Battery

As an option with internal rechargeable battery

www.stauff.com/8/en/#75

C

Bottle Sampling Unit • Typ Bottle-Sampler-LasPaC





Bottle Sampling Unit 110 ml and Accessories

Product Description

Analysis Everywhere - Bottle Sampling Unit

If it is not possible to count particles directly on your system, you can use the oil sampling kit (page 82) to take oil samples for later analysis with the LasPaC bottle sampler.

Conditioning - The De-aeration Facility

A highly aerated fluid may lead to inaccurate results; therefore a de-aeration process has been incorporated into the bottle sampling units. By evacuating the air from the sampling chamber,

aeration within the fluid is removed, and the fluid is properly conditioned prior to sampling.

Your Choice - 110 ml or 500 ml Size

STAUFF offers two sizes of bottle sampling units for the LasPaC devices: 110 ml and 500 ml units.

The 110 ml unit is supplied in an extra case including various accessories such as power supply, sampling hoses, pressure hoses, bottles (sample and waste) and adaptors. It is designed for mobile applications and is only compatible with Mineral Oil and Petroleum based fluids.

The 500 ml bottle sampling unit is delivered with five sample bottles and the required power supply.

Please note that the moisture / temperature sensor does not work in combination with bottle sampler devices.





Bottle Sampling Unit 110 ml

Order Codes



Bottle Sampling Unit 500 ml

110 ml Bottle Sampling Unit	
suitable for Mineral Oil and	110-M
Petroleum based fluids only	
500 ml Bottle Sampling Unit	
suitable for Mineral Oil and	500 M/0
Petroleum based fluids,	500-M/G
Specific Water Glycol fluids and bio-oils	
500 ml Bottle Sampling Unit	
suitable for Phosphate Ester	500-E
(e.g. Skydrol®)	



Moisture / Temperature Sensor

Product Description

More Oil Analysis - Oil Saturation and Temperature In Mineral Oils and non-aqueous fire resistant fluids, water is undesirable. Once the water exceeds a saturation level (about 500 ppm for Mineral Oils) the fluid starts to appear hazy. Above this level there is a danger of free water accumulating in the system. This can lead to corrosion and accelerated wear.

As an option, all STAUFF Particle Counters provide accurate and repeatable measurement of the saturation level of water in oil with the moisture / temperature sensor. The sensor is located internally in a specially designed housing and is positioned in the low pressure constant flow line.

Additional Information - Oil Temperature Readings

Beside the saturation level the optional moisture / temperature sensor of the STAUFF Particle Counters has the ability to measure the fluid temperature. This allows to provide a reference temperature for the RH (relative humidity / % saturation of water in oil) readings.

Both results, % RH and °C, are displayed on the main / test progress screen and on the printed analysis.

Please note: Due to the temperature gradient existing between the system tapping point and the RH / temperature module, the temperature reading can be 5° to 10° less than the actual system temperature, depending on operating conditions. The moisture / temperature sensor is not suitable for bottle sampling.

Product Description: Screen Filter • Type Screen-Filter-LasPaC

An optional Screen Filter is available for heavily contaminated systems. The filter device is assembled directly to the supply line and allows particle counts in ambient conditions where normally the contamination is too high for a reliable test.

The Stainless Steel Filter has a mesh of 500 μm and is cleanable.

Particle Counter • Accessories



Set-Paper-LasPaC-II-Printer

Set-Paper-LasPaC-3-Printer

Screen-Filter-LasPaC-M/G Screen-Filter-LasPaC-E

Adaptor-PPC-04/12-RS232-to-USB-CAB

* Cleaned in accordance with DIN/ISO 5884 and verified to ISO 3722 with a NAS 1638 cleanliness of between Class 00 and 0.

Screen filter (for Mineral Oil/Petroleum based fluids, specific Water Glycol fluids, bio-oils)



(1) Type of Accessories / Spare Parts

110 ml certified clean* bottle (5 pieces) 250 ml certified clean* bottle (5 pieces)

110 ml glass sample bottle (5 pieces)

250 ml glass sample bottle (5 pieces) 500 ml glass sample bottle (5 pieces)

Printer paper LasPaC-II-P (5 pieces)

Printer paper LasPaC-3-P (5 pieces)

Screen filter (for Phosphate Ester)

Waste hose 2 m / 6.56 ft

RS 232 to USB converter

Pressure hose 1,5 m / 4.92 ft

Order Codes

77

Saturation Point Emulsified 75 % 50 % 25 % 0 %

Saturation Levels

Since the effects of free (also emulsified) water are more harmful than those of dissolved water, water levels should remain always well below the saturation point.

However, even water in solution can cause damage, and therefore every reasonable effort should be made to keep saturation levels as low as possible.

There is no such thing as too little water. As a guideline, we recommend maintaining saturation levels below 50 % in all equipment.

Different oils have different saturation levels, and % saturation is the best and most practical measurement.

These results can be converted to ppm (parts per million), if the oil type saturation / temperature characteristic is known.




Accessories / Spare Parts



Particle Monitor - LPM-II-plus



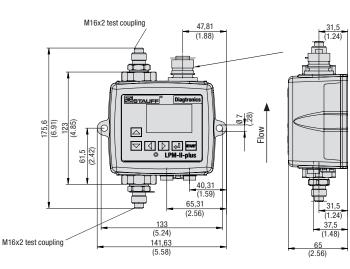

Product Description

The LPM-II-plus Particle Monitor determines the contamination level of the measured fluid on eight size channels and offers precise and complete determination of particle sizes in accordance with international standards.

The LPM-II-plus is an automatic, optical particle counter with high-performance LEDs that work on the light obscuration principle. STAUFF recommends recalibrating the measuring equipment at regular intervals.

- · Multicolour indicators via LCD and LED with output alarm signals as standard
- Two switching outputs for customer-specific limit values
- 4-20mA analogue output as standard (time multiplex)

Options

- Moisture sensor / temperature sensor: RH in % (relative humidity) and temperatures in °C
- USB Port for Data transfer (optional)

Technical Data

Channels

4, 6, 14, 21, 25, 38, 50, 70 μm(c)

Calibration

ISO Medium Test Dust (MTD) in accordance with ISO 11171

Analysis range


- ISO 4406 Codes 0-24
- NAS 1638 Classes 00-12
- AS 4059 / ISO 11218 Rev E, Table 1 Codes 00-12
- AS 4059 / ISO 11218 Rev E, Table 2 Codes A-F: 000-12
- AS 4059 Rev F, Table 1 Codes 000-12
- AS 4059 Rev F, Table 2 Codes cps 000-12 GBT 14039 Codes 0-24
- GJB 420B Codes, A-F: 000-12

Accuracy:

± 1/2 class for:

- ISO 4406 and GBT 14039 Codes 8-24 and for Codes 4, 6, 14 µm(c)
- NAS 1638 and AS 4059 / ISO 11218 Rev E and F,
- Table 1 Size Codes Class 2-12, AS4059 / ISO 11218 Rev E and F Table 2 and GJB 420B Size classes, A: 000-12, B: 00-12, C: 00-12, D: 2-12, E: 4-12,
- F: 7-12
- ± 1 class for larger sizes and lower size codes as mentioned above

Order Codes



(1) Series and Type Particle Monitor (Incl. LPM-II-CAB-P-FL-3 connecting cable)

(2) Version

With display and keypad	
Without display and keypad	

③ Fluid Compatibility

```
Fluids based on Mineral Oil and Petroleum
                                                     Μ
Phosphate Ester (e.g. Skydrol®)
Specific Water Glycols and bio-oils
```

Note: If you have any queries on fluid compatibility, please contact STAUFF.

Flow

20 ... 400 ml/min / 0.005 ... 0.11 US GPM

Viscosity Range

 $\leq 1000 \text{ mm}^2/\text{s}$

Medium Temperature

-25 °C ... +80 °C / -13 °F ... +176 °F

Ambient Temperature

■ LMP II-0: -25 °C ... +80 °C / -13 °F ... +176 °F LMP II-D: -25 °C ... +55 °C / -13 °F ... +131 °F

Weight

1,6kg / 3.53 lbs

Max. Pressure

420 bar / 6091 PSI static Note: In systems with extreme pressure peaks, please contact STAUFF

Test Duration

- Settable between 10 ... 3600 sec., set ex-works to 120 sec.
- As standard with start delay and freely programmable test intervals

Moisture Sensor / Temperature Sensor

- % RH (relative humidity) ±3 %
- ±3 °C / ±32 °F

Volumetric Flow Measurement

As display only

(4) Moisture Sensor / Temperature Sensor Without moisture sensor / temperature sensor 0

With moisture sensor / temperature sensor w

Please note: Not suitable for Phosphate Ester (e.g. Skydrol®), Water Glycol fluids and bio-oils.

(5) Interface

D

0

E

G

USB interface to transfer measured data to a data carrier

U

- Note: In the case applications with extreme pressure peaks, please contact STAUFF. Note: You need an interface module with either a USB or
- an Ethernet interface for exporting and programming.

Hose Connections

Test coupling STAUFF Test 20 or comparable (M16 x 2)

Data Storage

Max. 4000 measuring results

Interfaces

- RS485, RS232, Modbus, CAN Bus
- 4-20 mA time multiplex interface
- USB interface to transfer measured data to a data carrier (optional)

International Protection Rating

- IP 65/67: Dust-proof and protected from spray
- Impact resistance rating IK04

Power Supply / Power

9 ... 36 V DC, < 2.2 W</p> (connecting cable with flying leads is included)

Current Consumption


- 12 V: 70 mA (LPM-II-plus-0), 150 mA (LPM-II-plus-D)
- 24 V: 40 mA (LPM-II-plus-0), 80 mA (LPM-II-plus-D)
- 36 V: 30 mA (LPM-II-plus-0), 60 mA (LPM-II-plus-D)

Housing Surface Treatment

- · Polyurethane based paint, according to BSX34 colour BS381-638 (dark sea grey)
- Tested according to: BS2X34A and BS2X34B, MM0114 and SP-J-513-083 Part II CLA
- The unit meets: MIL-PRF-85285




Interface Module with USB or Ethernet Interface • INTERFACE -LPM-II-USB/ETH

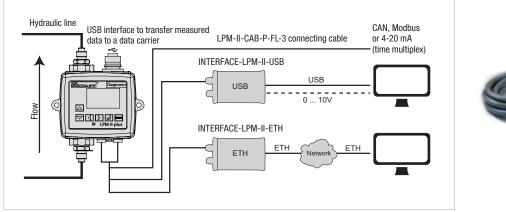




Connection diagram: PC connection of the LPM-II-plus Particle Monitor

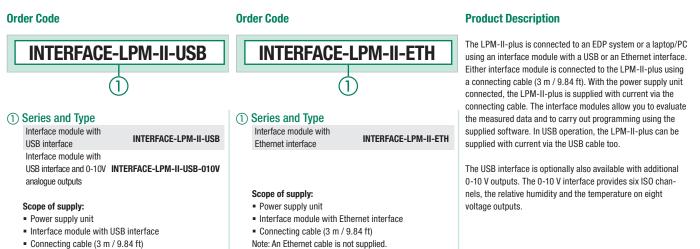


Remote Display Unit • DISPLAY-LPM-II-plus-REMOTE

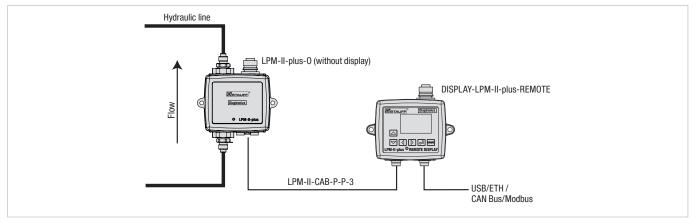

Connection diagram: Remote display

USB cable

Order Code



Product Description

In the case of applications outside the operator's field of view or in locations that are difficult to access, it is possible to display via a remote display the values that the LPM-II-plus measured.

STAUFF

Flow Control Valve = DAV-LPM-II



Product Description

In systems in which the volumetric flow or the pressure is too high, the optimum flow is achieved with the use of a flow control valve.


It can process pressures from 4 bar \dots 400 bar / 58 PSI \dots 5801 PSI.

The DAV-LPM-II, flow control valve is connected to the hydraulic outlet of the LPM-II-plus via the connection fittings.


Max. Permissible Operating Pressure

400 bar / 5801 PSI

Note: Note that a minimum operating pressure of 4 bar / $58\ \rm PSI$ must be maintained for the proper function of the flow control valve.




Order Code






(2) Fluid Compatibility


-			
	Fluids based on Mineral Oil and Petroleum	Μ	
	Phosphate Ester (e.g. Skydrol®)	Е	
	Specific Water Glycols and bio-oils	G	

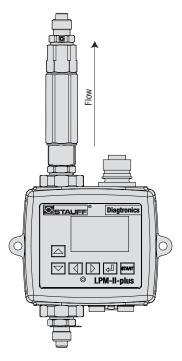

LPM-II-plus with flow control valve DAV-LPM-II

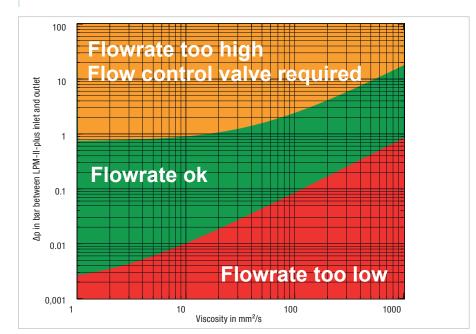


Application example

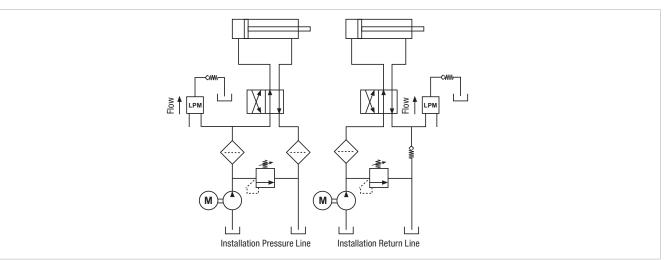



Oil Analysis Equipment

Particle Monitor • LPM-II-...-CX

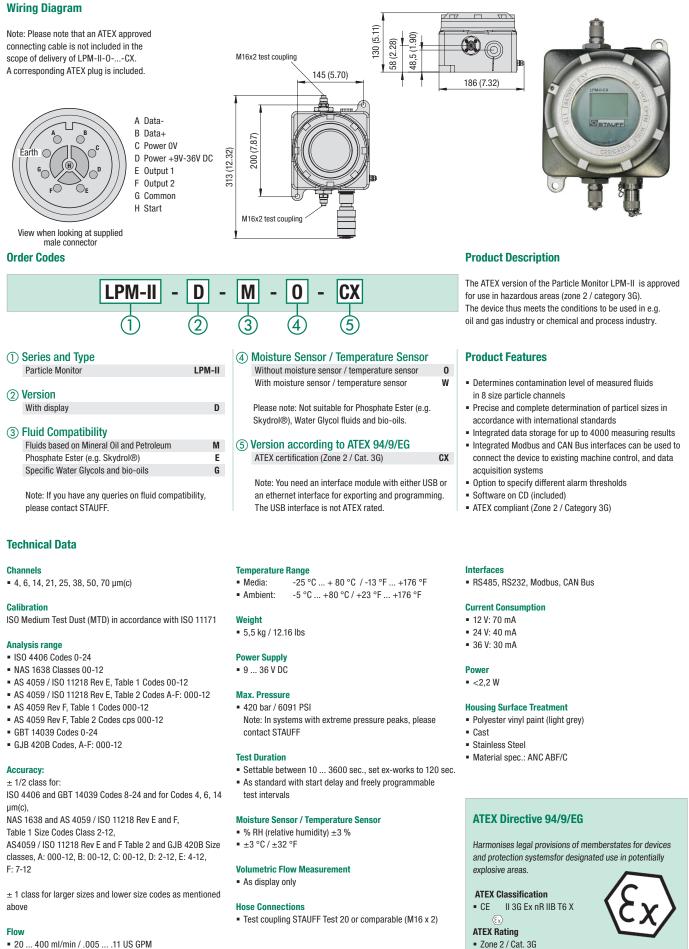

Viscosity Range

• $\leq 1000 \text{ mm}^2/\text{s}$

81

Zone 2 / Cat. 3G



Data Storage

Max. 4000 measuring results

Oil Sampling Kit - Type KIT-SFS



Product Description

C

Fluid analysis is a crucial component of any oil management program. Early detection of potential problems can prevent costly repairs and downtime. STAUFF KIT-SFS oil analysis kits provide the tools to take a sample from a STAUFF test coupling or directly from a reservoir or sump.

For this the supplied hose is directly connected to the test coupling with an adaptor and the fluid is filled into the supplied vials.

But there is also the possibility to draw up the sample directly from a tank with the hand pump and fill it into the vial.

This sample set is available in two versions with BSP and NPT test couplings.

Scope of Delivery

- Contains vacuum pump for drawing samples of oil equipment
- 1 m / 3.28 ft hose for insertion into tank
- Two sample bottles
- STAUFF test points and adaptor allows oil sample to be taken from STAUFF Test 20 test points

Components


KIT-SFS-01

- 1x Fluid Sample Pump FSP-38
- 1x Hose adaptor SHA-20-5.5mm
- 1 m / 3.28 ft Push on 1/4" hose
- 1x SMK-20-1/4NPT-V-D-W3
 1x SMK-20-7/16UNF-V-E-W3
- IX SMK-20-7/160NF Sample bottles
- Sample bottles


KIT-SFS-02


- 1x Fluid Sample Pump FSP-38
- 1x Hose adaptor SHA-20-5.5mm
- 1 m / 3.28 ft Push on 1/4" hose
- 1x SMK-20-G1/4-B-C-W3
- 1x SMK-20-M10x1-B-A-W3
- Sample bottles



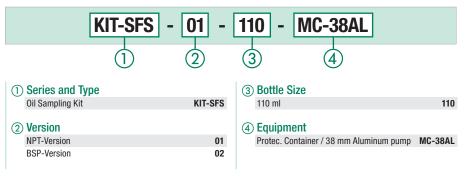



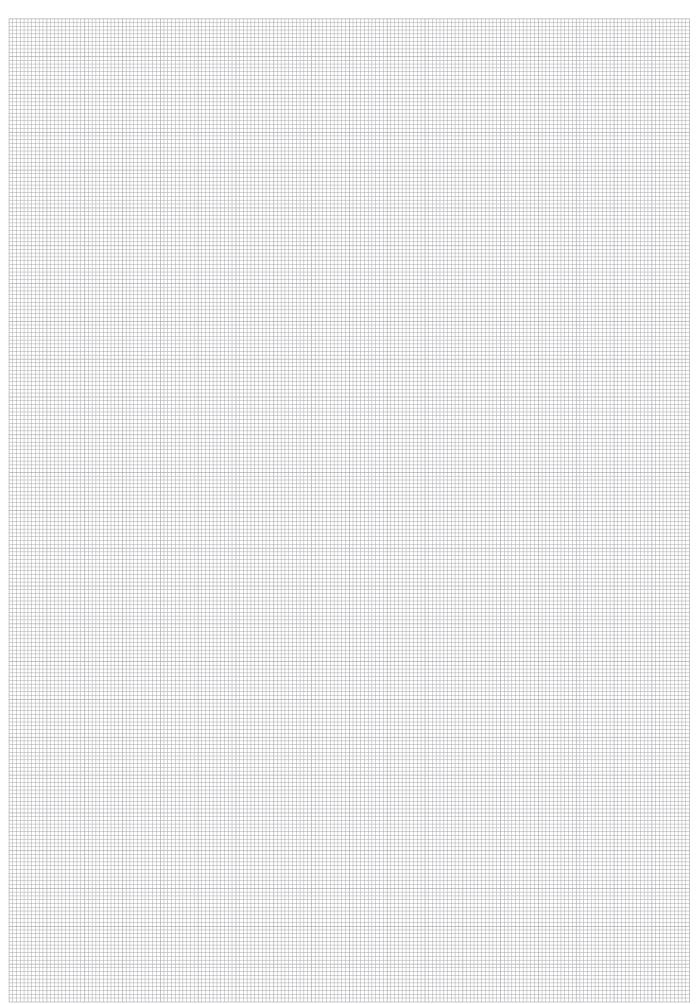

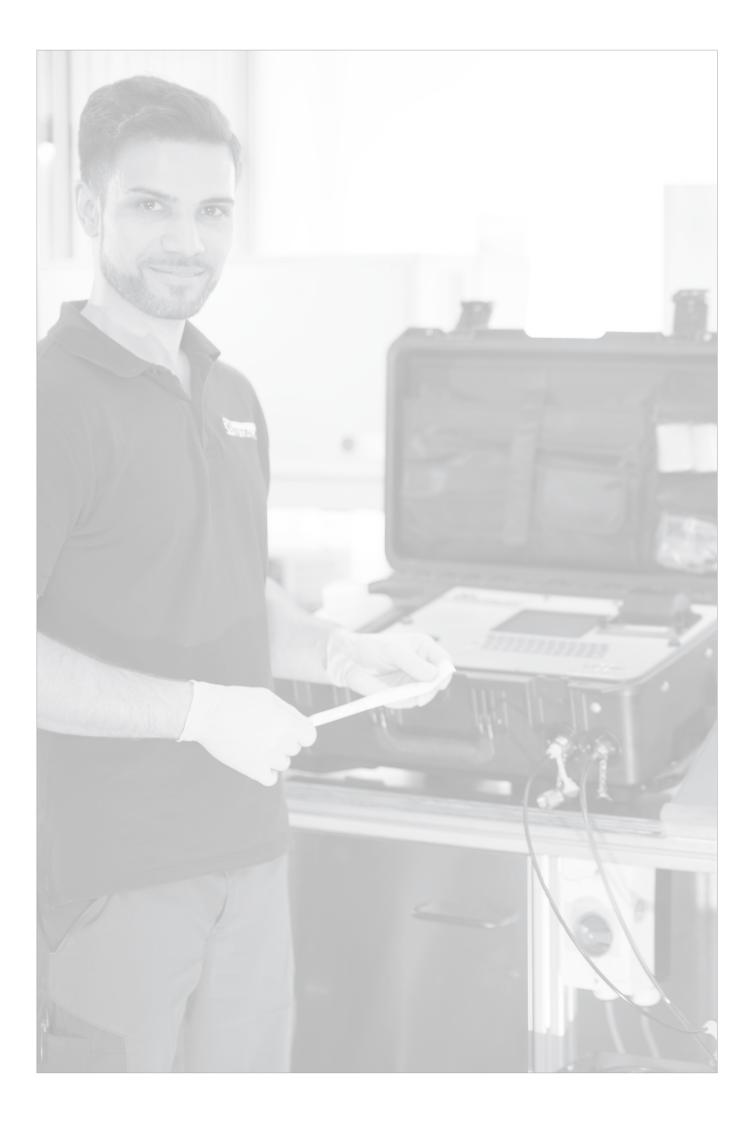



Product-Specific Abbreviations	86
Global Contact Directory	88 - 89




Product-Specific Abbreviations

Abbreviation	Product Category	Product Description	Page
Bottle-Sampler-LasPaC-II	Oil Analysis Equipment	Bottle Sampler Unit	76
DAV-LPM-II	Oil Analysis Equipment	Flow Control Valve	80
DISPLAY-LPM-II-plus-REMOTE	Oil Analysis Equipment	Particle Monitor	79
Flow-meter-PPC-04/12-SFM	Hydraulic Testers	Flow Turbine	42
Flow-meter-PPC-CAN-SFM	Hydraulic Testers	Flow Turbine	43
Interface-LPM-II-USB/ETH	Oil Analysis Equipment	Particle Monitor Interface	79
KIT-SFS	Oil Analysis Equipment	Oil Sampling Kit	82
LasPaC-II-M	Oil Analysis Equipment	Laser Particle Counter (Mobile)	74
LasPaC-3-P	Oil Analysis Equipment	Laser Particle Counter (Professional)	70
LPM-IICX	Oil Analysis Equipment	Particle Monitor (ATEX)	81
LPM-II-plus	Oil Analysis Equipment	Particle Monitor	78
PPC-04-plus-SET	Hydraulic Testers	Complete Systems	48
PPC-PAD-light-SET	Hydraulic Testers	Complete Systems	48
PPC-04-plus-CAN-SET	Hydraulic Testers	Complete Systems	49
PPC-PAD-light-CAN-X-SET	Hydraulic Testers	Complete Systems	49
PPC-04-plus	Hydraulic Testers	Hydraulic Testers	26
PPC-04-plus-CAN	Hydraulic Testers	Hydraulic Testers	26
PPC-PAD-light	Hydraulic Testers	Hydraulic Testers	29
PPC-PAD-light-CAN	Hydraulic Testers	Hydraulic Testers	29
PPC-PAD-light-CAN-AUX	Hydraulic Testers	Hydraulic Testers	29
PPC-PAD-plus	Hydraulic Testers	Hydraulic Testers	33
PPC-PAD-plus (Starter System)	Hydraulic Testers	Complete Systems	50
PT-RF	Hydraulic Testers	Pressure Transmitter	54
PT-RF-SET	Hydraulic Testers	Pressure Transmitter (Complete Systems)	56
Reader-PT-RF	Hydraulic Testers	Pressure Transmitter Reader	55
SBAA	Hydraulic Testers	Accumulator Adaptor for Pressure Transmitter	58
SBAA-P	Hydraulic Testers	Accumulator Adaptor for Pressure Transmitter	59
SDAA	Hydraulic Testers	Accumulator Adaptor for Pressure Transmitter	58
SDM	Hydraulic Testers	Flow Indicators	62
SDMKR	Hydraulic Testers	Flow Indicators	62
Sensorconverter-PPC	Hydraulic Testers	Current / Voltage / Frequency Converter	45
Sensor-PPC-04/12-P	Hydraulic Testers	Pressure Sensors	36
Sensor-PPC-04/12-PT	Hydraulic Testers	Pressure / Temperature Sensors	40
Sensor-PPC-04/12-SDS-CAB	Hydraulic Testers	Rotational Speed Sensor	44
Sensor-PPC-04/12-T	Hydraulic Testers	Temperature Sensors	38
Sensor-PPC-CAN-P	Hydraulic Testers	Pressure Sensors	37
Sensor-PPC-CAN-PT	Hydraulic Testers	Pressure / Temperature Sensors	41
Sensor-PPC-CAN-T	Hydraulic Testers	Temperature Sensors	39
SMB-20 / SMB-15	Pressure Gauges	Analogue Pressure Test Kit	18
SMB-DIGI / SMB-DIGI-USB	Pressure Gauges	Digital Pressure Test Kit	21
SPG	Pressure Gauges	Analogue Pressure Gauge	16
SPG-DIGI / SPG-DIGI-USB	Pressure Gauges	Digital Pressure Gauge	20





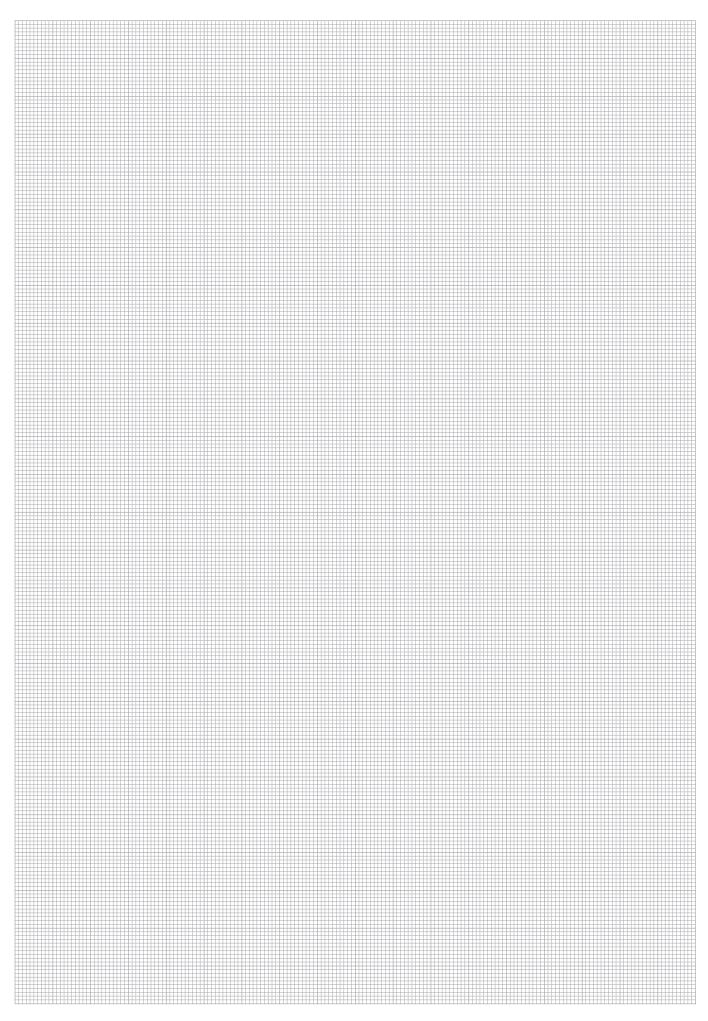



Global Contact Directory

STAUFF products and services are globally available through wholly-owned subsidiaries and a tight network of authorised distributors and representatives in all major industrial regions of the world.

Contact information on this page may be subject to changes and additions over time. Frequently updated and complete contact information can always be found at www.stauff.com.

Germany



Walter Stauffenberg GmbH & Co. KG Im Ehrenfeld 4 58791 Werdohl www.stauff.com/contact







Neuenrade-Küntrop Logistics Centre Plettenberg-Ohle Production Site Lennestraße 2 58840 Plettenberg



Meinerzhagen Production Site Neugrünental 1 58540 Meinerzhagen



STAUFF Digital Phoenixplatz 3 44263 Dortmund

Wasserburgstraße 35

58809 Neuenrade

Europe

France

STAUFF S.A.S.

230, Avenue du Grain d'Or Z.I. de Vineuil - Blois Sud 41354 Vineuil-cedex Tel.: +33 2 54 50 55 50 Fax: +33 2 54 42 29 19 E-Mail: direction@stauffsa.com www.stauff.fr

Russian Federation

STAUFF LLC Building 1 19, Leninskaya Sloboda Moscow, 115280 Tel.: +7 495 276 16 50 Fax: +7 495 276 16 51 F-Mail: sales@stauff ru www.stauff.ru

Further branch offices in Engels, Volzhskiy, Magnitogorsk, Nizhny Novgorod and St. Petersburg.

Ireland

STAUFF UK Ltd. Block B, 9 Ferguson Drive Knockmore Hill Industrial Estate Lisburn, County Antrim, BT28 2EX Tel.: +44 2892 60 69 00 Fax: +44 2892 60 26 88 E-Mail: sales@stauffireland.com www.stauff.co.uk

United Kingdon

STAUFF UK Ltd.

500, Carlisle Street East Off Downgate Drive Sheffield, S4 8BS Tel.: +44 114 251 85 18 Fax: +44 114 251 85 19 E-Mail: sales@stauff.co.uk www.stauff.co.uk

Italy

STAUFF Italia s.r.l Via Borima 21 (Frazione Borima) 23867 Suello (LC)

Tel.: +39 031 65 84 94 Fax: +39 031 65 50 05 E-Mail: sales@stauff.it www.stauff.it

STAUFF UK Ltd.

Badentoy Avenue Badentoy Industrial Estate Portlethen, Aberdeen, AB12 4YB Tel.: +44 1224 78 61 66 Fax: +44 1224 78 61 77 E-Mail: sales@stauffscotland.co.uk www.stauff.co.uk

Catalogue 8 - Edition 04/2025

Poland

STAUFF Polska Sp. z o.o. Miszewko 43 A 80-297 Banino

Tel.: +48 58 660 11 60 Fax: +48 58 629 79 52 E-Mail: sales@stauff.pl www.stauff.pl



Appendix

Global Contact Directory



North America

Canada

STAUFF Canada Ltd. 866 Milner Avenue Scarborough Ontario M1B 5N7 Tel.: +1 416 282 46 08 Fax: +1 416 282 30 39 E-Mail: sales@stauffcanada.com www.stauffcanada.com

United States

STAUFF Corporation 7 Wm. Demarest Place Waldwick, 07463-1542 New Jersey Tel.: +1 201 444 78 00 Fax: +1 201 444 78 52 E-Mail: sales@stauffusa.com www.stauffusa.com

Further branch office in Canton, Michigan.

South America Brazil

STAUFF Brasil Ltda. Avenida Gupê 10767 Galpão 2 - Bloco A Barueri, São Paulo, CEP 06422-120 Tel.: +55 11 47 72 72 00 Fax: +55 11 47 72 72 10 E-Mail: stauff@stauffbrasil.com **www.stauffbrasil.com**

Asia

China

STAUFF CHINA

Building 8, No. 1698, Minyi Road Songjiang District, Shanghai, 201612 Tel.: +86 21 68 18 70 00 Fax: +86 21 68 18 71 36 E-Mail: info@stauff.com.cn www.stauff.com.cn

Singapore

STAUFF (SEA) Pte. Ltd. 128 Joo Seng Road #02-01 Singapore 368356 Tel.: +65 62 44 61 68 E-Mail: sales_sg@stauff.com www.stauff.com.sg Further branch offices in Beijing, Changsha, Chengdu, Changchun, Chongqing, Jinan, Harbin, Guangzhou, Shenyang, Wuhan, Xian and Xuzhou.

Thailand

STAUFF (Thailand) Co., Ltd. 10 Soi On-Nut 74/4 Pravet District Bangkok 10250 Tel.: +66 2 721 73 23 / 24 Fax: +66 2 721 73 35 E-Mail: sales@stauff.co.th www.stauff.co.th

India

STAUFF India Pvt. Ltd. Gat no. 26/1 & 27, Sanghar Warehousing Pune - Nagar Road Lonikand - 412216 Tel.: +91 20 6731 4900 Fax: +91 20 6731 4905 E-Mail: sales@stauffindia.com **www.stauffindia.com**

Vietnam

STAUFF Vietnam Ltd. 8th Floor, Qunimex Building 28 Nguyen Thi Dieu District 3, Ho Chi Minh City Tel.: +84 8 3948 10 41 / 42 Fax: +84 8 3948 10 44 E-Mail: sales@stauff.com.vn www.stauff.com.vn

Korea

STAUFF Korea Ltd. 105, Hwajeonsandan 5-ro Gangseo-gu Busan, 46739 Tel.: +82 51 266 6666 Fax: +82 51 266 8866 E-Mail: info@stauff.co.kr www.stauff.co.kr

Oceania

Australia

STAUFF Corporation Pty Ltd 24-26 Doyle Avenue Unanderra NSW 2526


Tel.: +61 2 4271 9000 Fax: +61 2 4271 8432 E-Mail: sales@stauff.com.au www.stauff.com.au Further branch offices in Adelaide, Brisbane, Melbourne and Sydney.

New Zealand

STAUFF Corporation (NZ) Ltd. Unit D, 103 Harris Road East Tamaki, Auckland 2013


Tel.: +64 9 912 1530 Fax: +64 9 912 1531 E-Mail: sales@stauff.co.nz www.stauff.co.nz



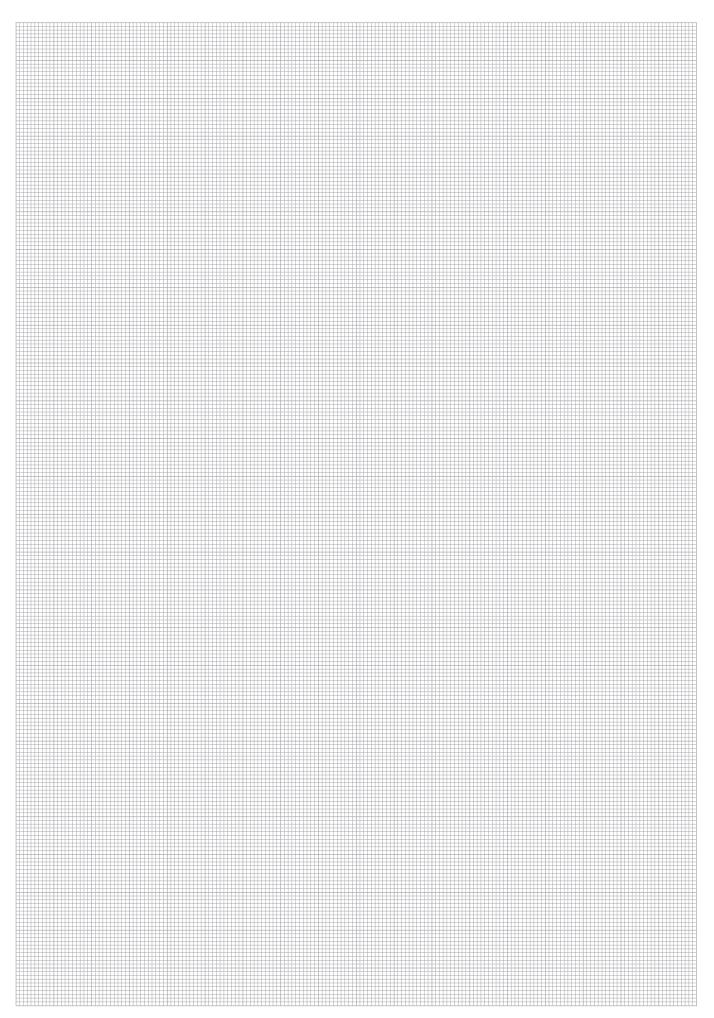





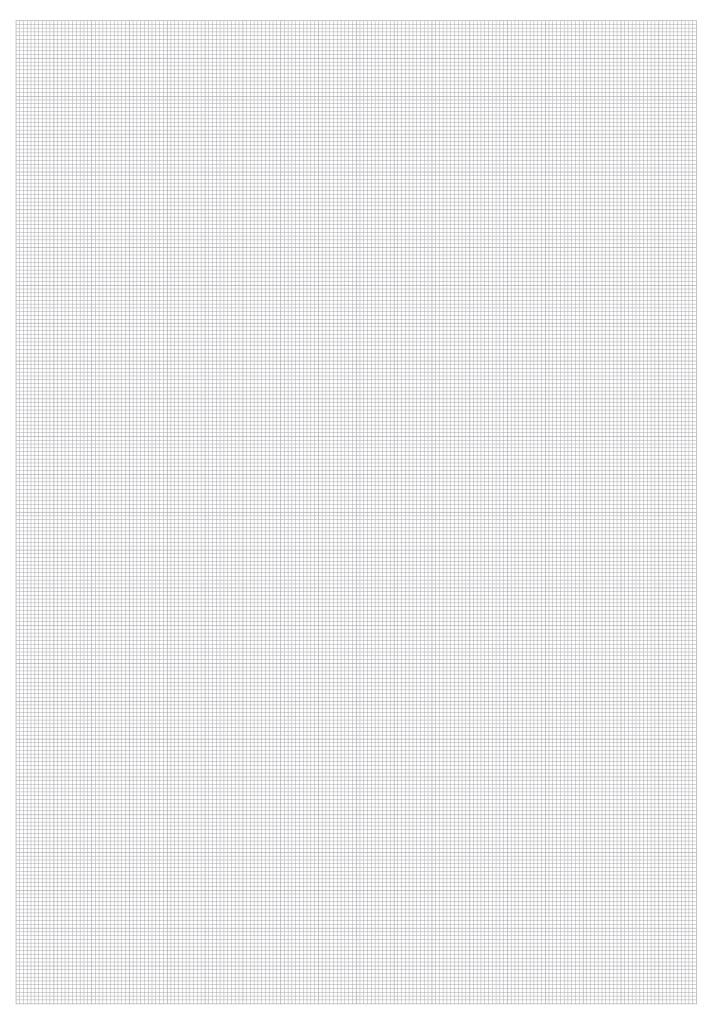

Introduction

Pressure Gauge

Hydraulic Testers

Oil Analysia Equipment

Appendix



Catalogue 8 STAUFF Diagtronics



Germany

Walter Stauffenberg GmbH & Co. KG Im Ehrenfeld 4 58791 Werdohl

STAUFF products and services are globally available through wholly-owned subsidiaries and a tight network of authorised distributors and representatives in all major industrial regions of the world.

Contact STAUFF

www.stauff.com/contact